A) # 4 Absorber is used only For 1260

B) OPERATION of #4 Absorber.

1) SET TEMP. ON BLEND TANK TO 140°C

2) SET TEMP ON Absorber TO MAINTAIN a TEMP. OF 140°C ON discharge OF Absorber. CHECK All TRACING of LINES.

3) Align Valve From BLEND TANK TO Absorber, From absorber Through FILTER and INTO FINISHED Product TANK.

4) START TRANS. Pump (Cold PRESS Pump) d/s. 85 psi

5) Adjust Flow To approx 4-5 gal PER MIN. on PANEL Board.

NOTE: you MUST check THE Valve Alignment TO KEEP From going Through old press & TO go TO THE CORRECT F.P. TANK.

6) This Absorber will be use on a batch Sys.

C) THERE are TEMP controller (Field Mounted) on EACH BLEND TANK at absorber.

PCB-ARCH-EXT0374769

#4 ABSORBER

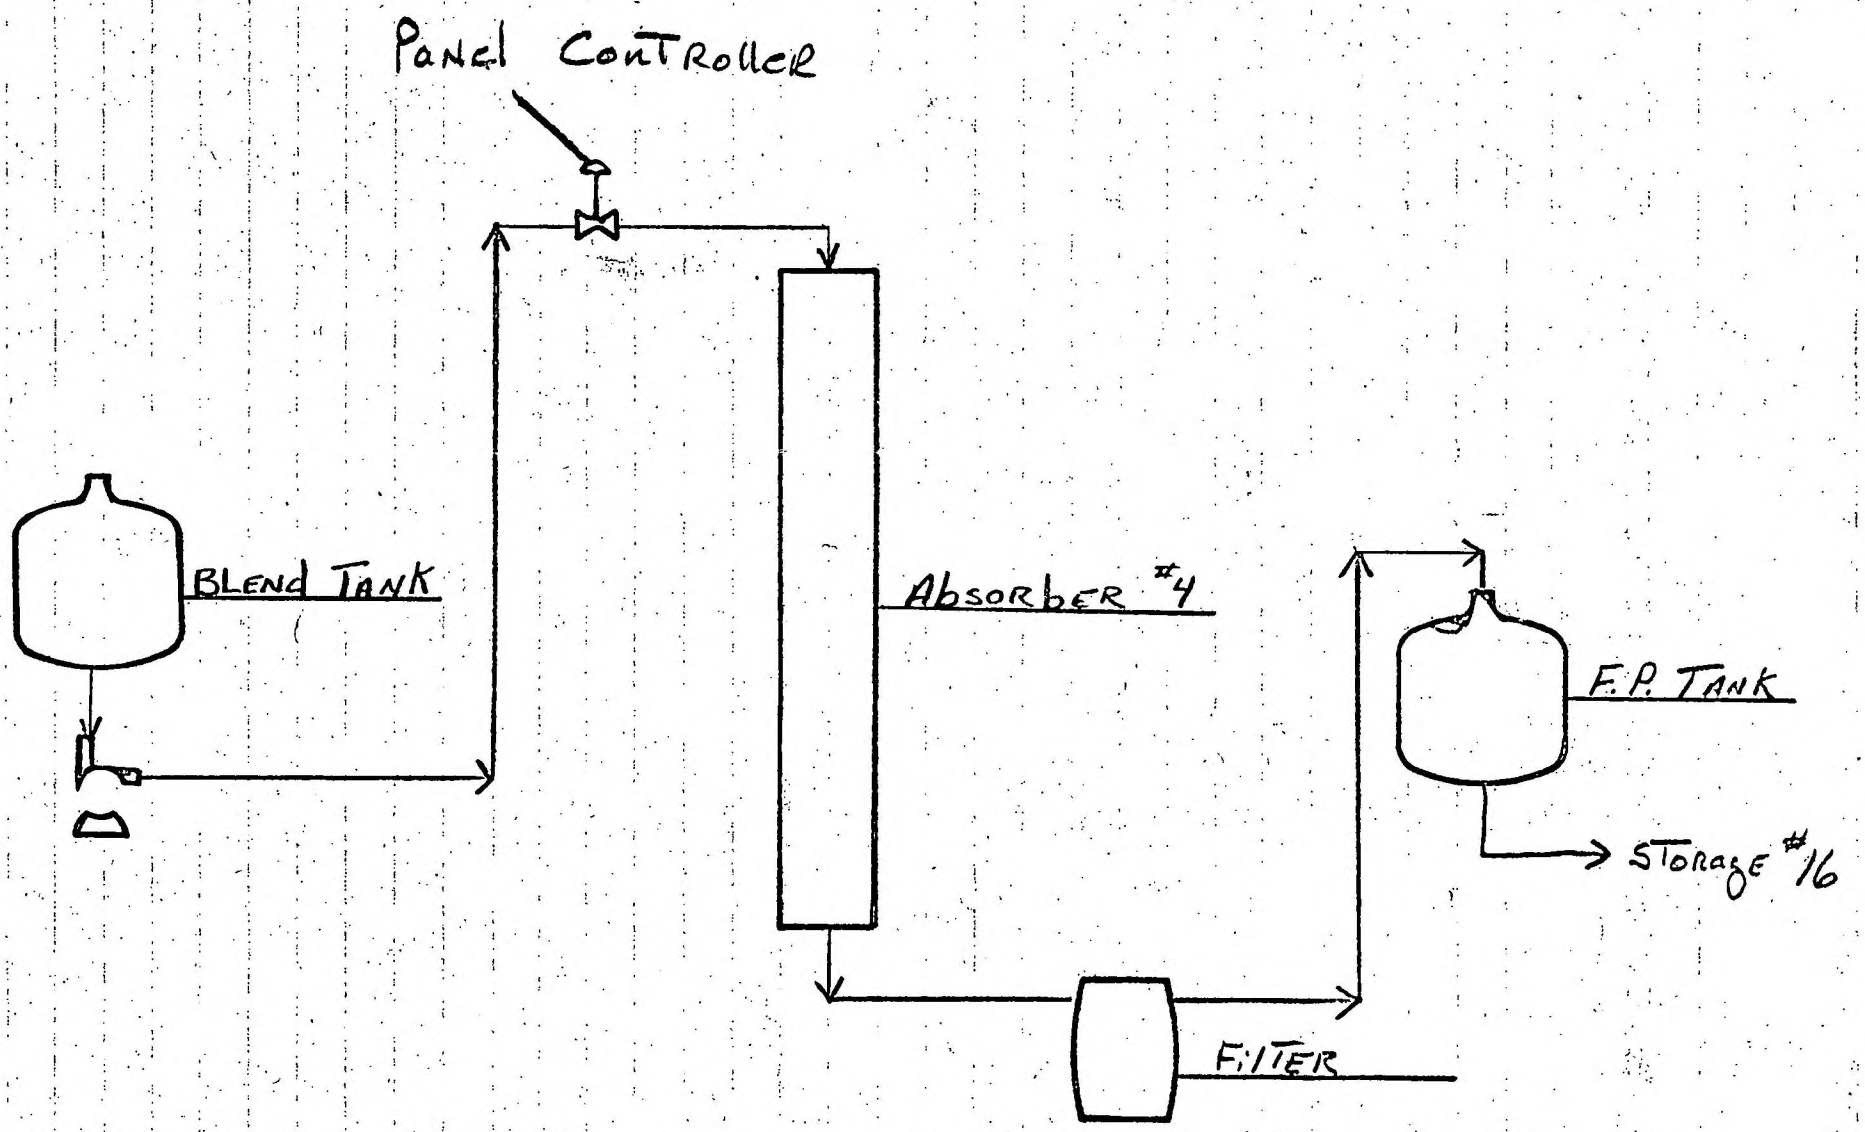

PCB-ARCH-EXT0374770