

R
REG
DAT

'SEVENTY-FIVE'
Gloss
HOUSE PAINT

PRIMING WHITE

ONE GALLON

"SEVENTY-FIVE" GLOSS HOUSE PAINT

(Formerly "75" House Paint)

"75" House Paint is a premium quality, modified linseed oil gloss paint for exterior use. Ideal for repainting prefinished aluminum siding. Available in Priming White, standard colors, and three types of finish white: self-cleaning White; CC White for Controlled Chalking—trim work, etc.; and White Bases No. 1, 2, and 3 (for tinting only) for body or trim work.

DIRECTIONS

Preparation — Remove dirt, chalk, and loose paint. Repair flashings, caulk, provide adequate ventilation for release of moisture. Sand under eaves and protected areas, **wash with detergent and thoroughly rinse.**

Priming — Unless badly weathered, prefinished aluminum siding does not require priming. Prime new wood, and prime or spot prime previous paint in poor condition with "75" House Paint Priming White. Prime new masonry with alkali-resistant "A-R" Primer. Prime bare metal with Flexico Metal Primer. Etch galvanized metal before priming. Tint primers toward topcoat color.

Tinting — Tint White Bases No. 1, 2, and 3 with Tone-All Universal Tinting Colors according to O'Brien Symphonic Color System formulas. Do not use alkali-sensitive colorants Orange, Medium Yellow, and Medium Green on masonry surfaces unless sealed with alkali-resistant primer.

Application — Stir well. Apply over a dry surface at temperature not less than 60° F. If thinning is desired, use turpentine or mineral spirits up to one-half pint per gallon for brush application. For spray, thin with light naphtha 1 pint per gallon. Avoid painting in damp weather or late in the evening. Allow 48 hours good drying weather between coats.

SPECIAL: Enamelized Trim Colors—Hard-finish, faster drying colors for trim use only. Do not prime with conventional house paint primer. Use as a self-primer over new wood, by reducing 1st coat with one pint of turpentine or mineral spirits per gallon. Apply at package consistency over previous paints. —(PYOW)


SINCE

1875

O'BRIEN

MADE BY THE O'BRIEN CORPORATION

SOUTH BEND IND • BALTIMORE MD • OKLAHOMA CITY OKLA • LOS ANGELES CAL • BRUNSWICK GA

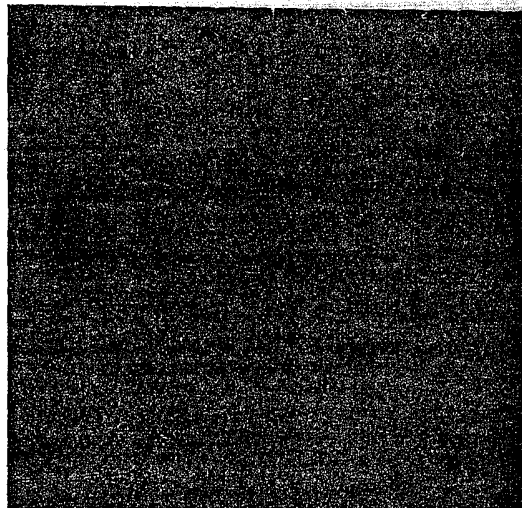

CAUTION! COMBUSTIBLE!
CONTAINS LEAD. HARMFUL IF SWALLOWED. Keep away from heat and open flame. Do not apply on window sills, toys, furniture or interior surfaces of rooms which may be used by children. Avoid prolonged contact with skin and breathing of vapor or spray mist. Close container after each use. Use with adequate ventilation. KEEP OUT OF THE REACH OF CHILDREN.

"SEVENTY-FIVE" HOUSE PAINT
PRIMING WHITE

Pigment	59.95%
Titanium Dioxide	12.50%
Barium Sulfate	37.50%
Lead	12.50%
48% PbO (Yn)	37.50%
Silicates	100.00%

Vehicle

Treated Linseed Oil	24.11%
Raw Linseed Oil	24.17%
Etter Gum	1.25%
Mineral Spirits and Dilut	48.48%
(LATOL)	100.00%



REGISTERED

7513B

REG'D. No.

5-13-68

DATE

"SEVENTY-FIVE" *Gloss* HOUSE PAINT

CHERRY RED

ENAMELIZED TRIM COLOR

ONE GALLON

"SEVENTY-FIVE" GLOSS HOUSE PAINT

(Formerly "75" House Paint)

"75" House Paint is a premium quality, modified linseed oil gloss paint for exterior use. Ideal for repainting prefinished aluminum siding. Available in Priming White, standard colors, and three types of finish white: self-cleaning White; CC White for Controlled Chalking—trim work, etc.; and White Bases No. 1, 2, and 3 (for tinting only) for body or trim work.

DIRECTIONS

Preparation — Remove dirt, chalk, and loose paint. Repair flashings, caulk, provide adequate ventilation for release of moisture. Sand under eaves and protected areas, wash with detergent and thoroughly rinse.

Priming — Unless badly weathered, prefinished aluminum siding does not require priming. Prime new wood, and prime or spot prime previous paint in poor condition with "75" House Paint Priming White. Prime new masonry with alkali-resistant "A-R" Primer. Prime bare metal with Flexico Metal Primer. Etch galvanized metal before priming. Tint primers toward topcoat color.

Tinting — Tint White Bases No. 1, 2, and 3 with Tone-All Universal Tinting Colors according to O'Brien Symphonic Color System formulas. Do not use alkali-sensitive colorants Orange, Medium Yellow, and Medium Green on masonry surfaces unless sealed with alkali-resistant primer.

Application — Stir well. Apply over a dry surface at temperature not less than 60° F. If thinning is desired, use turpentine or mineral spirits up to one-half pint per gallon for brush application. For spray, thin with light naphtha 1 pint per gallon. Avoid painting in damp weather or late in the evening. Allow 48 hours good drying weather between coats.

SPECIAL: Enamelized Trim Colors—Hard-finish, faster drying colors for trim use only. Do not prime with conventional house paint primer. Use as a self-primer over new wood, by reducing 1st coat with one pint of turpentine or mineral spirits per gallon. Apply at package consistency over previous paints.

— (PYOW)

SINCE




1875

MADE BY THE O'BRIEN CORPORATION

SOUTH BEND IND • BALTIMORE MD • OKLAHOMA CITY OKLA • LOS ANGELES CAL • BRUNSWICK GA

CAUTION! COMBUSTIBLE!
CONTAINS LEAD. HARMFUL IF SWALLOWED. Keep away from heat and open flame. Do not apply on window sills, toys, furniture or interior surfaces of rooms which may be used by children. Avoid prolonged contact with skin and breathing of vapor or spray mist. Close container after each use. Use with adequate ventilation. KEEP OUT OF THE REACH OF CHILDREN.

"75" HOUSE PAINT TRIM COLOR
CHERRY RED 11.83%
100.00%
100.00%
Semi-Modified Alkyd Resin 99.65%
Semi-Modified Oil Solvent 35.17%
Mineral Spirits & Solvent 100.00%

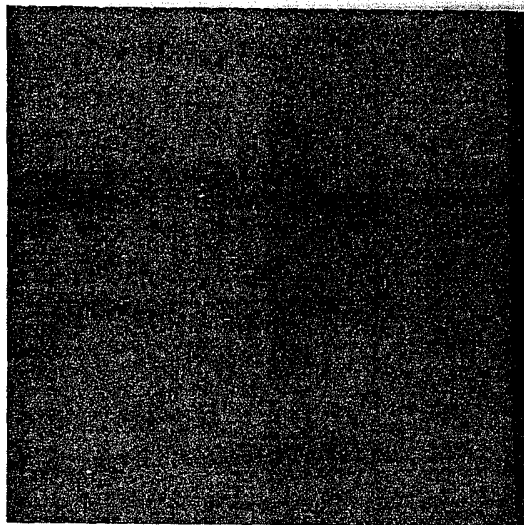



REGISTERED

8513

REGN. No.

9-23-68

DATE

"SEVENTY-FIVE" *Gloss* HOUSE PAINT

EVERGREEN

ENAMELIZED TRIM COLOR

ONE GALLON

"SEVENTY-FIVE" GLOSS HOUSE PAINT

(Formerly "75" House Paint)

"75" House Paint is a premium quality, modified linseed oil gloss paint for exterior use. Ideal for repainting prefinished aluminum siding. Available in Priming White, standard colors, and three types of finish white: self-cleaning White; CC White for Controlled Chalking—trim work, etc.; and White Bases No. 1, 2, and 3 (for tinting only) for body or trim work.

DIRECTIONS

Preparation — Remove dirt, chalk, and loose paint. Repair flashings, caulk, provide adequate ventilation for release of moisture. Sand under eaves and protected areas, wash with detergent and thoroughly rinse.

Priming — Unless badly weathered, prefinished aluminum siding does not require priming. Prime new wood, and prime or spot prime previous paint in poor condition with "75" House Paint Priming White. Prime new masonry with alkali-resistant "A-R" Primer. Prime bare metal with Flexico Metal Primer. Etch galvanized metal before priming. Tint primers toward topcoat color.

Tinting — Tint White Bases No. 1, 2, and 3 with Tone-All Universal Tinting Colors according to O'Brien Symphonic Color System formulas. Do not use alkali-sensitive colorants Orange, Medium Yellow, and Medium Green on masonry surfaces unless sealed with alkali-resistant primer.

Application — Stir well. Apply over a dry surface at temperature not less than 60° F. If thinning is desired, use turpentine or mineral spirits up to one-half pint per gallon for brush application. For spray, thin with light naphtha 1 pint per gallon. Avoid painting in damp weather or late in the evening. Allow 48 hours good drying weather between coats.

SPECIAL: Enamelized Trim Colors—Hard-finish, faster drying colors for trim use only. Do not prime with conventional house paint primer. Use as a self-primer over new wood, by reducing 1st coat with one pint of turpentine or mineral spirits per gallon. Apply at package consistency over previous paints. — (PYOW)

SINCE

1875


O'BRIEN

MADE BY THE O'BRIEN CORPORATION

SOUTH BEND IND • BALTIMORE MD • OKLAHOMA CITY OKLA • LOS ANGELES CAL • BRUNSWICK GA

CAUTION! COMBUSTIBLE!
CONTAINS LEAD. HARMFUL IF SWALLOWED. Keep away from heat and open flame. Do not apply on window sills, toys, furniture or interior surfaces of rooms which may be used by children. Avoid prolonged contact with skin and breathing of vapor or spray mist. Close container after each use. Use with adequate ventilation. **KEEP OUT OF THE REACH OF CHILDREN.**

"75" HOUSE PAINT TRIM	
Pigment	30.61%
C. P. Chrome Green	45.17%
Lead White	8.17%
Silicates	45.10%
	100.00%
Vehicle	69.39%
Sore Alkyl Resin Oil	35.10%
Mineral Spirits and Dilers	41.68%
	100.00%
	(BAACI)

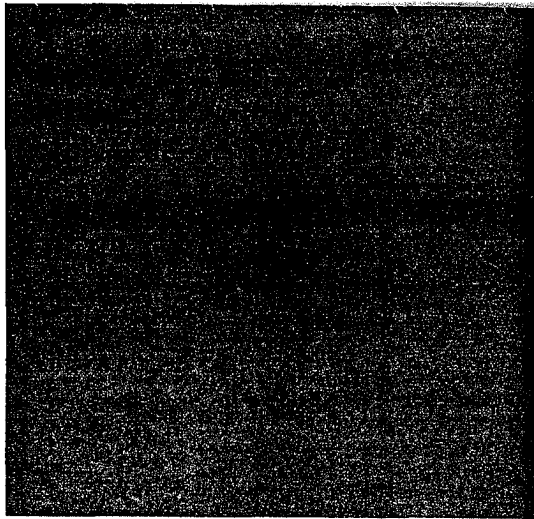



REGISTERED

8513

REGN. No.

9-23-08

DATE

"SEVENTY-FIVE" *Gloss* HOUSE PAINT

MEADOW GREEN

ONE GALLON

"SEVENTY-FIVE" GLOSS HOUSE PAINT

(Formerly "75" House Paint)

"75" House Paint is a premium quality, modified linseed oil gloss paint for exterior use. Ideal for repainting prefinished aluminum siding. Available in Priming White, standard colors, and three types of finish white: self-cleaning White; CC White for Controlled Chalking—trim work, etc.; and White Bases No. 1, 2, and 3 (for tinting only) for body or trim work.

DIRECTIONS

Preparation — Remove dirt, chalk, and loose paint. Repair flashings, caulk, provide adequate ventilation for release of moisture. Sand under eaves and protected areas, wash with detergent and thoroughly rinse.

Priming — Unless badly weathered, prefinished aluminum siding does not require priming. Prime new wood, and prime or spot prime previous paint in poor condition with "75" House Paint Priming White. Prime new masonry with alkali-resistant "A-R" Primer. Prime bare metal with Flexico Metal Primer. Etch galvanized metal before priming. Tint primers toward topcoat color.

Tinting — Tint White Bases No. 1, 2, and 3 with Tone-All Universal Tinting Colors according to O'Brien Symphonic Color System formulas. Do not use alkali-sensitive colorants Orange, Medium Yellow, and Medium Green on masonry surfaces unless sealed with alkali-resistant primer.

Application — Stir well. Apply over a dry surface at temperature not less than 60° F. If thinning is desired, use turpentine or mineral spirits up to one-half pint per gallon for brush application. For spray, thin with light naphtha 1 pint per gallon. Avoid painting in damp weather or late in the evening. Allow 48 hours good drying weather between coats.

SPECIAL: Enamelized Trim Colors—Hard-finish, faster drying colors for trim use only. Do not prime with conventional house paint primer. Use as a self-primer over new wood, by reducing 1st coat with one pint of turpentine or mineral spirits per gallon. Apply at package consistency over previous paints. — (PYOW)

SINCE



1875

MADE BY THE O'BRIEN CORPORATION

SOUTH BEND IND • BALTIMORE MD • OKLAHOMA CITY OKLA • LOS ANGELES CAL • BRUNSWICK GA

CAUTION! COMBUSTIBLE!
CONTAINS LEAD. HARMFUL IF SWALLOWED. Keep away from heat and open flame. Do not apply on window sills, toys, furniture or interior surfaces of rooms which may be used by children. Avoid prolonged contact with skin and breathing of vapor or spray mist. Close container after each use. Use with adequate ventilation. KEEP OUT OF THE REACH OF CHILDREN.

"75" GLOSS HOUSE PAINT
MEADOW GREEN

Pigment	32.15%
C. P. Chrome Green	46.35%
C. P. Chrome Yellow	30.31%
Silica	100.00%
Vehicle	67.85%
Solvent	21.14%
Mineral Spirits and Driers	41.21%
(RAAOL)	100.00%



O'BRIEN

"SEVENTY-FIVE"
Gloss
HOUSE PAINT

NILE GREEN

ONE GALLON

"SEVENTY-FIVE" GLOSS HOUSE PAINT

(Formerly "75" House Paint)

"75" House Paint is a premium quality, modified linseed oil gloss paint for exterior use. Ideal for repainting prefinished aluminum siding. Available in Priming White, standard colors, and three types of finish white: self-cleaning White; CC White for Controlled Chalking—trim work, etc.; and White Bases No. 1, 2, and 3 (for tinting only) for body or trim work.

DIRECTIONS

Preparation — Remove dirt, chalk, and loose paint. Repair flashings, caulk, provide adequate ventilation for release of moisture. Sand under eaves and protected areas, **wash with detergent and thoroughly rinse.**

Priming — Unless badly weathered, prefinished aluminum siding does not require priming. Prime new wood, and prime or spot prime previous paint in poor condition with "75" House Paint Priming White. Prime new masonry with alkali-resistant "A-R" Primer. Prime bare metal with Flexico Metal Primer. Etch galvanized metal before priming. Tint primers toward topcoat color.

Tinting — Tint White Bases No. 1, 2, and 3 with Tone-All Universal Tinting Colors according to O'Brien Symphonic Color System formulas. Do not use alkali-sensitive colorants Orange, Medium Yellow, and Medium Green on masonry surfaces unless sealed with alkali-resistant primer.

Application — Stir well. Apply over a dry surface at temperature not less than 60° F. If thinning is desired, use turpentine or mineral spirits up to one-half pint per gallon for brush application. For spray, thin with light naphtha 1 pint per gallon. Avoid painting in damp weather or late in the evening. Allow 48 hours good drying weather between coats.

SPECIAL: Enamelized Trim Colors—Hard-finish, faster drying colors for trim use only. Do not prime with conventional house paint primer. Use as a self-primer over new wood, by reducing 1st coat with one pint of turpentine or mineral spirits per gallon. Apply at package consistency over previous paints. — (PYOW)

CAUTION! COMBUSTIBLE!
CONTAINS LEAD. HARMFUL IF SWALLOWED. Keep away from heat and open flame. Do not apply on window sills, toys, furniture or interior surfaces of rooms which may be used by children. Avoid prolonged contact with skin and breathing of vapor or spray mist. Close container after each use. Use with adequate ventilation. **KEEP OUT OF THE REACH OF CHILDREN.**

"75" GLOSS HOUSE PAINT	
Pigment	55.99%
Titanium Dioxide	10.31%
Zinc Oxide	24.48%
Zinc Chromate	1.41%
Chromium Oxide	3.41%
Magnesium Oxide	24.49%
Calcium Silicate	2.51%
Calcium Carbonate	100.00%
Vehicle	44.01%
Raw Linseed Oil	43.72%
Heat Treated Linseed Oil	25.86%
Turpentine	27.84%
Mineral Spirits and Driers	100.00%
(AOC1)	

SINCE

O'BRIEN

1875

THE O'BRIEN CORPORATION • SOUTH BEND, IND.

BALTIMORE, MD. • OKLAHOMA CITY, OKLA. • LOS ANGELES, CAL. • SAN FRANCISCO, CAL. • BRUNSWICK, GA.



REGISTERED

REGN. No. 8513

DATE 9-23-68

"SEVENTY-FIVE" *Gloss* HOUSE PAINT

BRAZIL BROWN

ENAMELIZED TRIM COLOR

ONE GALLON

"SEVENTY-FIVE" GLOSS HOUSE PAINT

(Formerly "75" House Paint)

"75" House Paint is a premium quality, modified linseed oil gloss paint for exterior use. Ideal for repainting prefinished aluminum siding. Available in Priming White, standard colors, and three types of finish white; self-cleaning White; CC White for Controlled Chalking—trim work, etc.; and White Bases No. 1, 2, and 3 (for tinting only) for body or trim work.

DIRECTIONS

Preparation — Remove dirt, chalk, and loose paint. Repair flashings, caulk, provide adequate ventilation for release of moisture. Sand under eaves and protected areas, wash with detergent and thoroughly rinse.

Priming — Unless badly weathered, prefinished aluminum siding does not require priming. Prime new wood, and prime or spot prime previous paint in poor condition with "75" House Paint Priming White. Prime new masonry with alkali-resistant "A-R" Primer. Prime bare metal with Flexico Metal Primer. Etch galvanized metal before priming. Tint primers toward topcoat color.

Tinting — Tint White Bases No. 1, 2, and 3 with Tone-All Universal Tinting Colors according to O'Brien Symphonic Color System formulas. Do not use alkali-sensitive colorants Orange, Medium Yellow, and Medium Green on masonry surfaces unless sealed with alkali-resistant primer.

Application — Stir well. Apply over a dry surface at temperature not less than 60° F. If thinning is desired, use turpentine or mineral spirits up to one-half pint per gallon for brush application. For spray, thin with light naphtha 1 pint per gallon. Avoid painting in damp weather or late in the evening. Allow 48 hours good drying weather between coats.


SPECIAL: Enamelized Trim Colors—Hard-finish, faster drying colors for trim use only. Do not prime with conventional house paint primer. Use as a self-primer over new wood, by reducing 1st coat with one pint of turpentine or mineral spirits per gallon. Apply at package consistency over previous paints. — (PYOW)

SINCE 1875



THE O'BRIEN CORPORATION • SOUTH BEND, IND.

BALTIMORE, MD. • OKLAHOMA CITY, OKLA. • LOS ANGELES, CAL. • SAN FRANCISCO, CAL. • BRUNSWICK, GA.

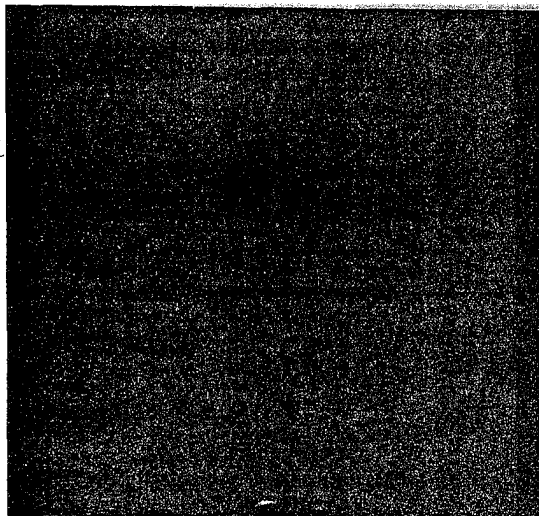

CAUTION! COMBUSTIBLE!
CONTAINS LEAD. HARMFUL IF SWALLOWED. Keep away from heat and open flame. Do not apply on window sills, toys, furniture or interior surfaces of rooms which may be used by children. Avoid prolonged contact with skin and breathing of vapor or spray mist. Close container after each use. Use with adequate ventilation. KEEP OUT OF THE REACH OF CHILDREN.

"75" HOUSE PAINT TRIM
BRAZIL BROWN
Pigment 74.72%
C.P. Brown Iron Oxide 7.00%
Ferric Yellow 10.00%
Bone Black 12.00%
Vehicle 100.00%
Linseed, Sero Alkyd Resin 61.31%
Raw Linseed Oil 5.00%
Mineral Spirits and Driers 33.69%
(N.A.O.S.)