

Sarco Company, Inc.

Empire State Bldg., New York 1, N. Y.


Branches in Principal Cities

SARCO CANADA LIMITED, 611 GERRARD ST., E., TORONTO 8, ONT.

PRODUCTS—A complete line of Specialties for steam and forced hot water heating systems, and automatic control for same, combined with a competent engineering service to architects and heating engineers to assist them in providing modern heating.

Catalogs are available on request. For complete information, please furnish details concerning your installation.

SARCO RADIATOR TRAPS




Radiator Trap, Type H


Type H is the standard radiator trap for vapor and vacuum systems. It is equipped with the well known Sarco heavy wall bellows, drawn from flat blanks and helically corrugated in our own plant. It operates noiselessly and positively at pressures from highest vacuum to 25 psi.

Body and cap are of brass, natural brass finish; self-aligning valve head and renewable seat of hard bronze; union connection on inlet.

In $\frac{1}{2}$ in. size available in angle, straight or offset patterns, $\frac{3}{4}$ in. angle and straight, 1 in. angle only; also $\frac{1}{2}$ in. and $\frac{3}{4}$ in. vertical.



Type 40



Type SM


SARCO RADIATOR VALVES

Sarco offers two types of valves; bellows packless type 40 wherein the valve stem is sealed by a standard Sarco bellows, positively preventing air leakage into the heating system; also "spring-packless" type SM. Both can be furnished with the modulating feature, including proportioning disc and indicating dial.

Valves in angle and straightway patterns, wheel handles or lock shield. Also available for hot water systems.

Bodies of all valves are brass, natural brass finish; outlet fitted with union connection; sizes $\frac{1}{2}$ in. to $1\frac{1}{2}$ in.


SARCO N-100 TRAPS



Thermostatic Trap

Similar in style to Sarco Radiator Trap, the N-100 Thermostatic Trap is suitable for operation at pressures up to 100 psi. Has full length element protecting shield to prevent abrasive action on bellows. Shield also protects element against damage if removed while hot. Stainless steel renewable valve head and seat. Sizes $\frac{3}{8}$ in. to 1 in. Also S-65 for pressures to 65 psi.

SARCO FLOAT-THERMOSTATIC TRAPS




Inverted Bucket Trap

Sarco offers a wide selection of Float-Thermostatic Traps, $\frac{3}{4}$ to $2\frac{1}{2}$ in. Available for pressures up to 200 psi. Traps 0-125 psi are equipped with built-in thermostatic air vents. High pressure 200 psi traps are equipped with external thermodynamic air by-pass.

SARCO INVERTED BUCKET TRAPS

Sarco inverted Bucket Traps are also offered in a wide range of sizes and suitable for pressures up to 900 psi. Seats and valves are stainless steel and renewable. Traps are regularly furnished with built-in strainers. Built in automatic air vents are available at extra charge. Sizes $\frac{1}{2}$ to 2 in.

SARCO ALTERNATING RECEIVER



Alternating Receiver

A complete line of boiler return traps for vapor systems. Returns water of condensation to boiler automatically, thereby assuring positive return of water under all pressure conditions.

Made in four sizes up to 14,000 sq ft of radiation. Same type available as a pumping trap for pressures to 100 psi.


SARCO AIR ELIMINATORS

For venting air from vapor systems at one central point in the basement. Available in three sizes, for systems up to 15000 sq ft radiation. All are equipped with float valves to stop water escaping through the vent and with check valves to prevent ingress of air when system is under vacuum.

Also several types for hot water heating systems.



Type 6 Air Eliminator

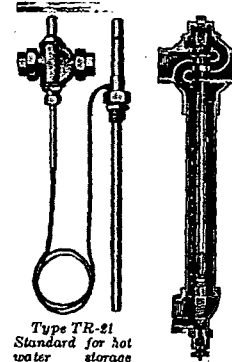

Type TR-21
Standard for hot
water storage
tanks, fan units,
etc.

Water Blender
Type MB

SARCO SELF-CONTAINED TEMPERATURE REGULATORS

Sarco Temperature Regulators are simple, self-operated valves—the only self-contained units that use the uniform force of liquid expansion. No stuffing boxes to leak, no auxiliary "power" required; all moving parts are inside the equipment. Here again—a type and size for every purpose—for steam, gas, oil, water or brine for temperatures ranging from 0 to 300°F.

SARCO WATER BLENDERS AND TEMPERING VALVES

For mixing hot and cold water to deliver automatically water at any desired temperature. Two models are available, type MB for showers, wash basins, etc., and type DB, a tempering valve for use with submerged heating coils or tankless heaters.



Water Blender
Type DB

SARCO SELF-CLEANING STRAINERS

For use in pipe lines carrying brine, steam, oil, gas, water, ammonia or air. Have large free screening area with minimum resistance to flow. Steam or air strainers can be cleaned by blowing through without disassembling. Made in cast iron, bronze or cast steel for pressures up to 600 psi, with brass, stn. steel or monel screens. Available in sizes $\frac{1}{4}$ to 8 in.

