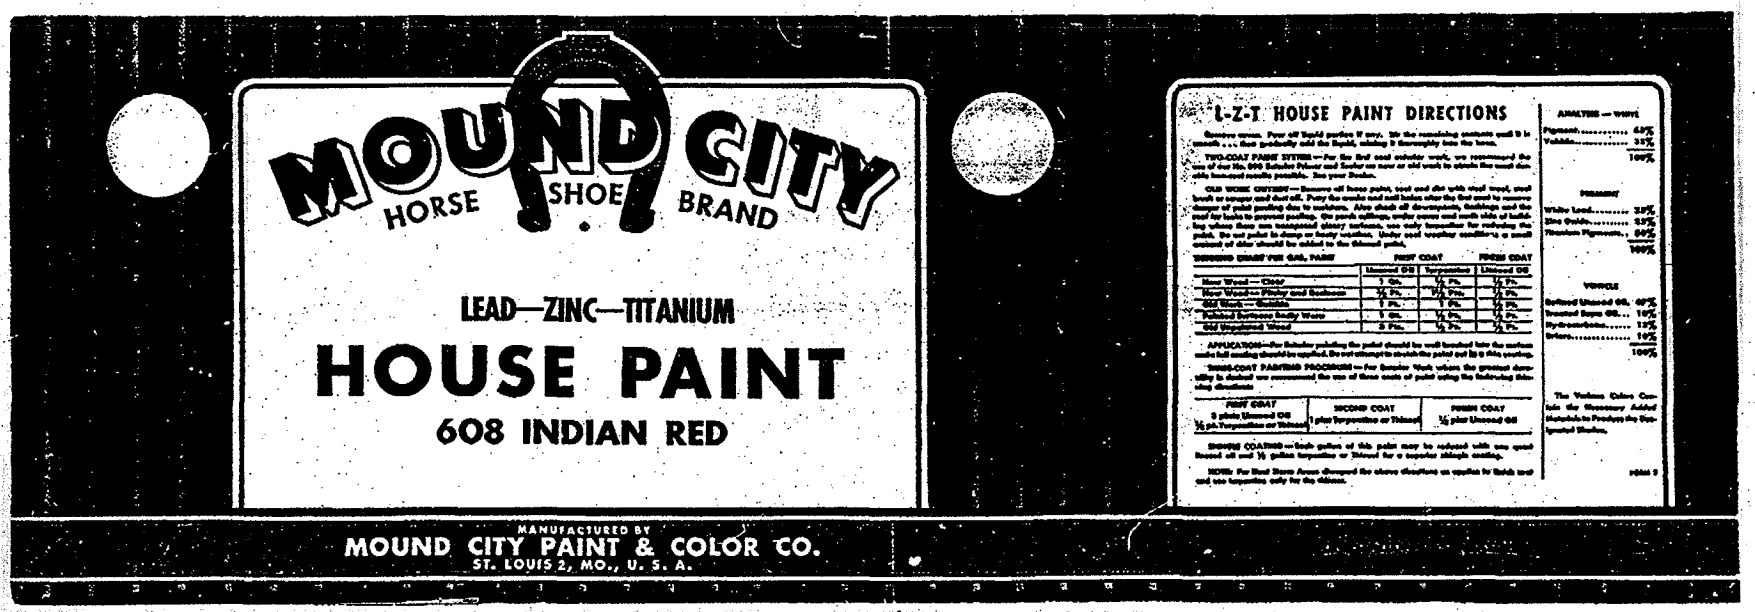

GLD 041740

N17368


CROMWELL
MERIT MIXED
118-HOUSE PAINT
OUTSIDE WHITE
FOR ALL EXTERIOR WOOD and METAL SURFACES
No. 118 HOU
WARNING
MANUFACTURED FOR MERC
NEW YORK,


Euston
HOUSE PAINT
PRIMER
SCRANTON, PA.
TIME-
PAINTS • VARNISHE
EUSTON HOU
Possessing unusual waterproofi
special liquids it contains, Eust
particularly for all new work o
ing is a source of constant trou
ingly sharp pigment increases
tooth for succeeding coats of
coats go farther over Euston
out with more body and fulline
DI
Stir paint thoroughly from the bott
in the liquid.
Do not apply over any surface con
Always allow Euston House Paint Pri
NEW WORK—Apply Euston House
OLD WORK—Remove all loose pa
necessary. Apply Euston House Pain
RELA
A quality brush is just as important
the related brush line, there are stu
the proper application of this prod

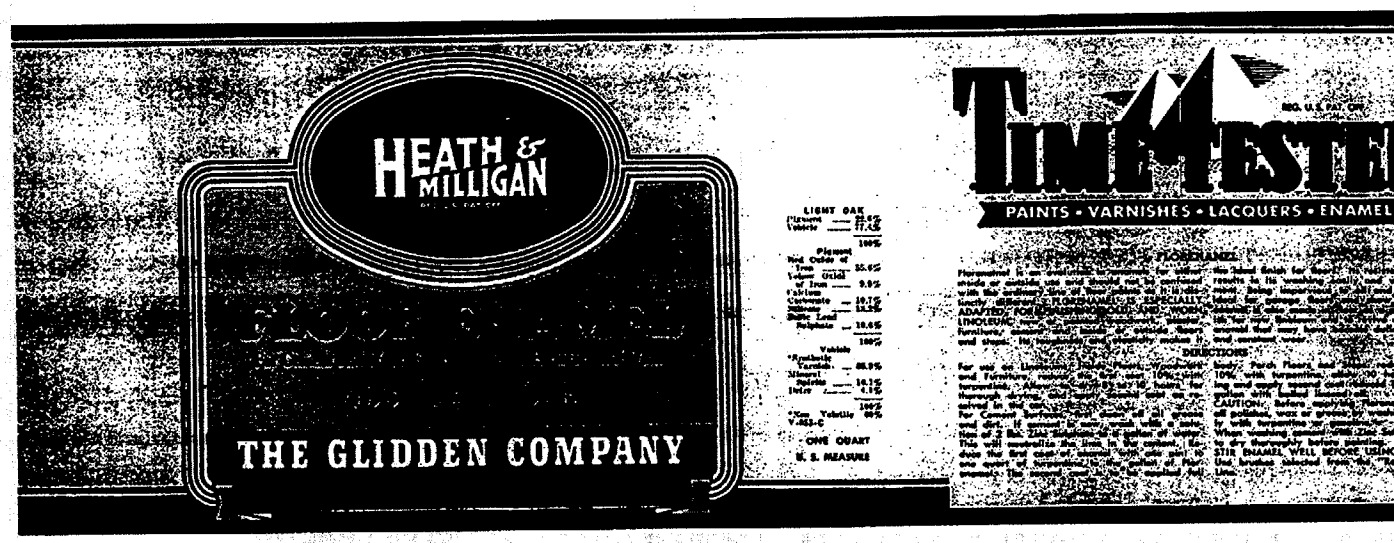
HEATH & MILLIGAN
THE GLIDDEN COMPANY
PAINTS • VARNISHES • LACQUERS • ENAMEL
ONE QUART
U. S. MEASURE

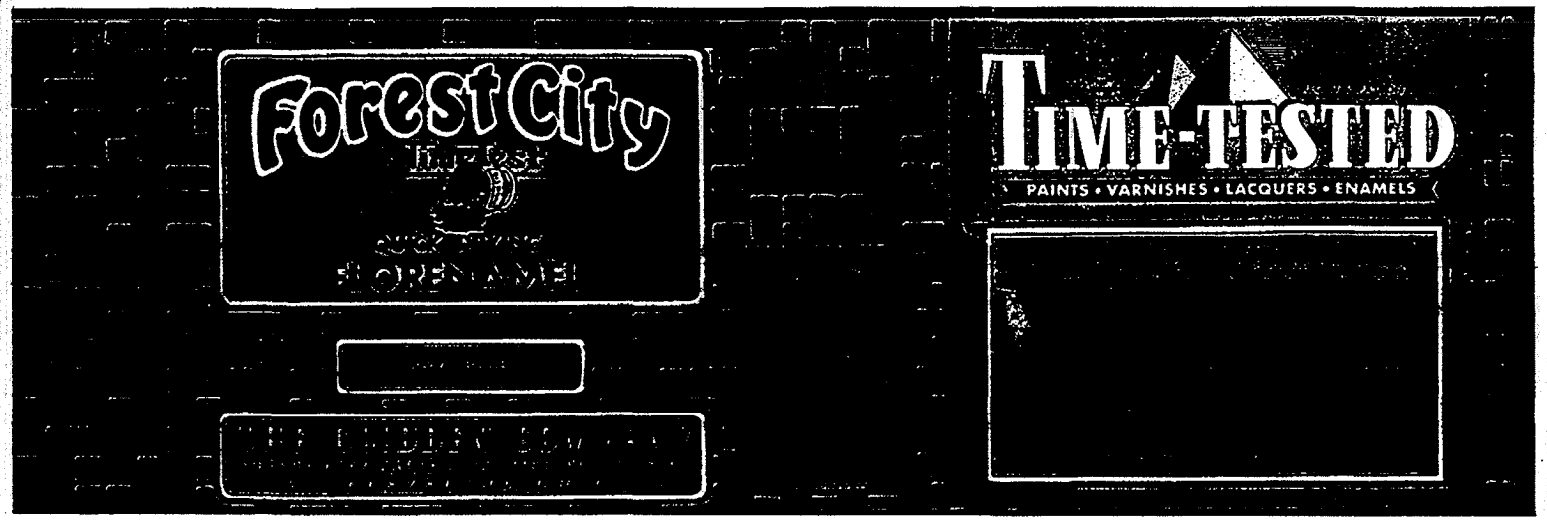
Forest City
TIME-TESTED
PAINTS • VARNISHES • LACQUERS • ENAMELS

GLD 041752

TIME-TESTED

REG. U. S. PAT. OFF.

CAMPBELL

QUALITY PAINT

QUICK DRYING

FLORENAMEL

Exterior Porches, Decks, Interior Floors, Dadoes

856-DARK OAK

THE GLIDDEN COMPANY

CAMPBELL PAINT & VARNISH COMPANY DIVISION

ST. LOUIS, MO.

TIME-TESTED

REG. U. S. PAT. OFF.

PAINTS · VARNISHES · LACQUERS · ENAMELS

FLORENAMEL

DIRECTIONS

For use on Linoleum, Inside Floors, Woodwork and Furniture, reduce th first coat 10% with Turpentine. Allow to dry 8 to 10 hours, and appl second coat as is.

Porch Floors and Steps: Reduce first coat 10% with Turpentine; allo 10 hours for drying and apply second coat reduced ½ pint to the gallo with boiled linseed oil.

For cement surfaces, first clean off all grease and dirt. If cement is ne wash with solution of 2 lbs. Zinc Sulphate to a gallon of water. This wi neutralize the lime in the cement. Reduce the first coat of enamel wi one pint to one quart of turpentine to the gallon of Florenamel. Th second coat is to be applied full body.

CAUTION: Before applying Florenamel, remove all polishes, wax grease by washing thoroughly with turpentine or gasoline.

When washing cement with Zinc Sulphate, allow to dry thoroughly befo painting. STIR ENAMEL WELL BEFORE USING. Use a "Related" Brus

ONE QUART U. S. MEASURE

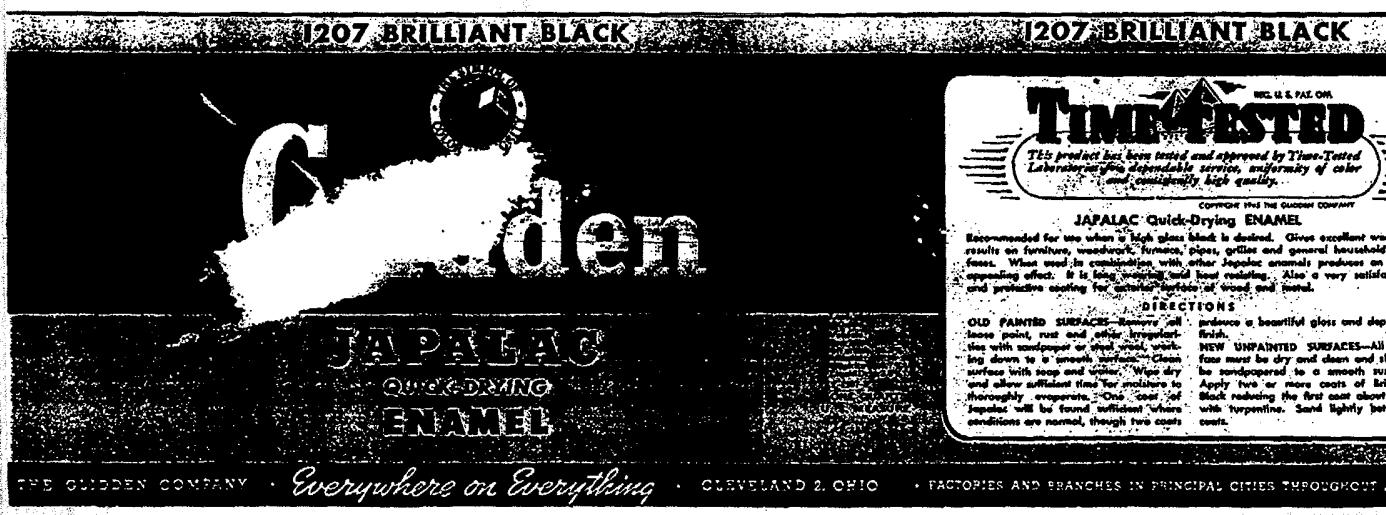
1207 BRILLIANT BLACK
1207 BRILLIANT BLACK
Glidden
JAPALAC
QUICK-DRYING
ENAMEL
TIME-TESTED
This product has been tested and approved by Time-Tested Laboratories for dependable service, uniformity of color and consistently high quality.
JAPALAC Quick-Drying ENAMEL
DIRECTIONS
THE GLIDDEN COMPANY · Everywhere on Everything · CLEVELAND 2, OHIO · FACTORIES AND BRANCHES IN PRINCIPAL CITIES THROUGHOUT