


THICK BLOKS and TAPERED BLOKS
Specifications Arranged by Width for Identifications,
Refer to Block Diagrams.

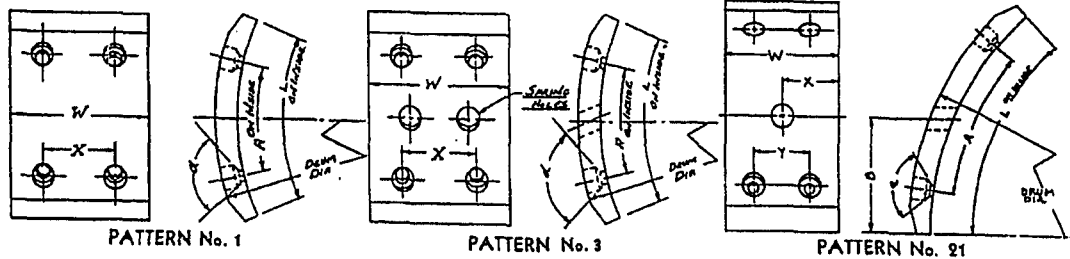

Pattern No.	Drum Diam.	W	X	Y	L	A	B	C	D	E	F	Counter-bore Angle	ABB-FMS Set No.
5" Width (continued)													
1	18	5	2 1/4	—	8 1/4	6.912	—	—	—	—	—	82°	4105D
1	18	5	3	—	8 1/4	6.336	—	—	—	—	—	82°	4516D
1	19	5	2 1/4	—	9 1/2	6.415	—	—	—	—	—	82°	4572D
1	20	5	2 1/4	—	8 1/4	7.103	—	—	—	—	—	82°	4235D
5-1/2" Width													
1	12 1/4	5 1/4	3 1/4	—	5 1/4	3 1/4	—	—	—	—	—	82°	4544D
1 (4 pcs.)	15	5 1/4	2 1/4	—	5 1/4	2 1/4	—	—	—	—	—	82°	CAM. 4330D
2 (4 pcs.)	15	5 1/4	2 1/4	—	—	—	2 1/4	2 1/4	—	—	—	82°	ANC. 4288D
1	16	5 1/4	2 1/4	—	8 1/4	6 1/4	—	—	—	—	—	82°	4195D
1	16 1/2	5 1/4	3 1/4	—	7 3/4	6.021	—	—	—	—	—	82°	4474D
1	16 1/2	5 1/4	3 1/4	—	8 1/4	4.803	—	—	—	—	—	82°	4056D
1	17 1/4	5 1/4	2 1/4	—	8 1/4	6 1/4	—	—	—	—	—	82°	4198D
1	17 1/4	5 1/4	3 1/4	—	8	5.520	—	—	—	—	—	82°	
6" Width													
1	12 1/4	6	3 1/4	—	5 1/4	3 1/4	—	—	—	—	—	82°	4593D
3 (2 pcs.)	14 1/2	6	3 1/4	—	6 3/4	4.538	—	—	—	—	—	82°	4228D
1 (6 pcs.)	14 1/2	6	3 1/4	—	6 3/4	4.538	—	—	—	—	—	82°	
1	14 1/2	6	3 1/4	—	6 3/4	4.538	—	—	—	—	—	82°	4228AD
1	14 1/2	6	2 1/4	—	6 3/4	4.538	—	—	—	—	—	82°	4228BD
21 (2 pcs.)	14 1/2	6	3	3 1/4	6 3/4	4.538	3 1/4	—	—	—	—	82°	4228ED
1 (6 pcs.)	14 1/2	6	3 1/4	—	6 3/4	4.538	—	—	—	—	—	82°	
1	14 1/2	6	2 1/4	—	5 1/4	4.538	—	—	—	—	—	82°	4513D
1	14 1/2	6	2 1/4	—	5 1/4	4.538	—	—	—	—	—	82°	4540D
1	15	6	3 1/4	—	6 1/2	5.006	—	—	—	—	—	82°	4555D
1	16	6	2 1/4	—	8 1/4	6 1/4	—	—	—	—	—	82°	4289D
1	16	6	2 1/4	—	8 1/4	5	—	—	—	—	—	82°	4289BD
1	16	6	2 1/4	—	8 1/4	5.568	—	—	—	—	—	82°	4289CD
1	16	6	2 1/4	—	7 1/2	5.568	—	—	—	—	—	82°	4322D
1	16	6	2 1/4	—	7 1/4	5.568	—	—	—	—	—	82°	4106D
1	16	6	2 1/4	—	6 1/4	4 1/2	—	—	—	—	—	82°	4300D
1	16	6	3 1/4	—	7 1/2	5.821	—	—	—	—	—	82°	4353D
1	16	6	2 1/4	—	8 1/4	5 1/2	—	—	—	—	—	82°	4412D
1	16	6	4 1/4	—	8 1/4	6 1/4	—	—	—	—	—	82°	4467D
1	16 1/2	6	2 1/4	—	7 3/4	6 1/2	—	—	—	—	—	82°	4285D
1	16 1/2	6	2 1/4	—	7 3/4	6 1/2	—	—	—	—	—	82°	4226D
1	16 1/2	6	2 1/4	—	7 3/2	6.021	—	—	—	—	—	82°	4317D
1	16 1/2	6	4	—	7 3/2	6.021	—	—	—	—	—	82°	4317AD
1	16 1/2	6	3 1/4	—	7 3/2	6.021	—	—	—	—	—	82°	4317CD
1	16 1/2	6	3	—	7 3/2	6.021	—	—	—	—	—	82°	4317FD
1	16 1/2	6	2 1/4	—	8 1/4	6 1/4	—	—	—	—	—	82°	4364AD
1	16 1/2	6	4 1/4	—	8 1/4	5.760	—	—	—	—	—	82°	4376BD