MERCOID RELAY FOR AUDIBLE ALARM

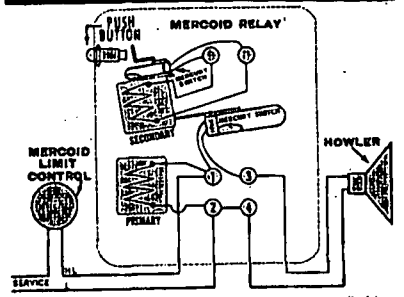

When Limit Control closes its circuit, current is supplied to primary coil of Mercoid Relay and through the normally closed mercury switch to the "Howler" (alarm). To stop "Howler," operator pushes in "push button" which manually raises relay secondary and breaks circuit to "Howler." Secondary is held up by magnetic repulsion until condition is corrected. When limit control opens the primary circuit of relay, secondary coil drops to normal position and relay is automatically ready for another operation.

WRITE FOR BULLETIN CA-8R

THE MERCOID CORPORATION, 4201 BELMONT AVE., CHICAGO, ILL.

WPS Engineering Department—quality begins here...

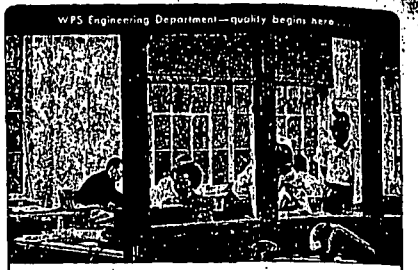

TEAMWORK PRODUCES BETTER PIPING

Western Piping Supply gives customers fabricated piping of superior quality because every job is a team job. Design engineers, draftsmen and foremen work together . . . laying out each job to provide flexibility and simplicity, at lowest possible total cost.

You'll get these benefits, too, when you specify WPS.

WESTERN PIPING SUPPLY DIVISION
THE LUMMUS COMPANY
504 WEST 145TH STREET, EAST CHICAGO, INDIANA
Representatives in Major Cities
FABRICATORS OF CARBON AND ALLOY PIPING

DEUTZ Diesel

air cooled

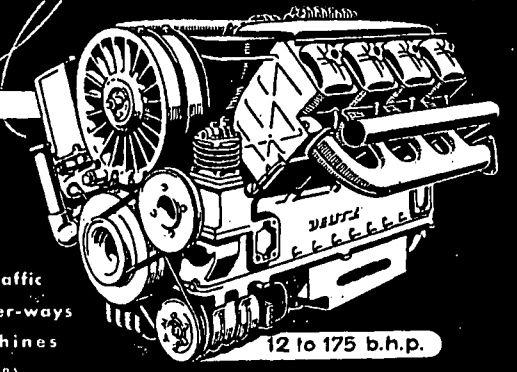

for
road and rail traffic
ships on all water-ways
working machines
for all applications

12 to 175 b.h.p.

KLÖCKNER-HUMBOLDT-DEUTZ AG · KÖLN
GERMANY

Clearest Water per dollar invested



This 200,000 gph hot lime-hot zeolite softener located at an eastern refinery is the world's largest installation.

GRAVER

SPHERICONE *Hot Process Water Softener*

In hot process water softening, the clarity of the effluent depends, among other factors, on the rising rate of the water through the unit...the greater the cross-sectional area, the lower the rates ...the lower the rates, the lower the turbidity. This lower turbidity means fewer filter backwashings and the very lowest labor costs.

The Sphericone, a Graver original design, offers a larger cross-sectional area per pound of steel used, and consequently per dollar invested, than the standard cylindrical type of hot process softener.

The expanding settling zone and larger cross-sectional area provide crystal clear effluent at rates, in many cases, up to 20-30% overload. These features, plus the Sphericone's high efficiency in silica reduction by contact with MgO sludge in a deep, dense blanket, make it one of the most important developments in the hot process softening field.

GRAVER WATER CONDITIONING CO.
Division of Graver Tank & Mfg. Co., Inc.
DEPT. P-HP, 216 WEST 14TH STREET, NEW YORK 11, N. Y.
In Canada: The Bird-Archer Co., Ltd., Cobourg, Ontario • In Mexico: Proveedores Tecnicos, S.A., Puebla 259, Mexico 7, D. F.