

FILE NAME: Hercules Chemical (HERC)

DATE: 0000

DOC#: HERC002

DOCUMENT DESCRIPTION: Asbestos Furnace Cement Directions


DIRECTIONS

For setting up furnaces, ranges or stoves clean all joints where cement is to be applied with a wire brush or other cleaning tool. Use enough cement to fill cup joints after being tightly packed. Be sure joints fit properly, and force back any cement which has squeezed out of the joints to make them airtight.

See directions on the 5-lb. bag of product for oven, 15 lbs. bag.

HERCULES ASBESTOS FURNACE CEMENT CO., INC.

NEW YORK, N. Y. 10001

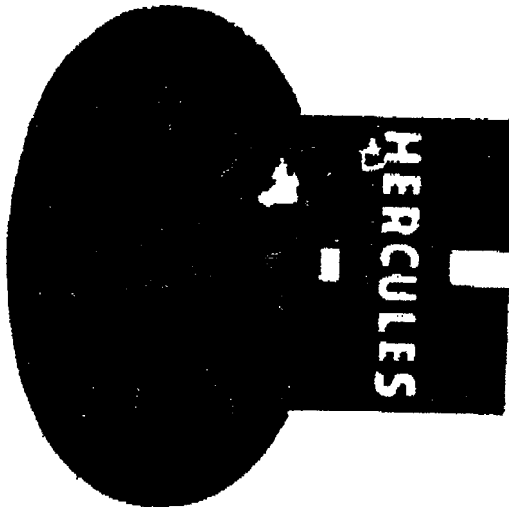

HERCULES ASBESTOS FURNACE CEMENT

DIRECTIONS

HERCULES ASBESTOS FURNACE CEMENT IS PREPARED AND READY TO USE. IT CONTAINS NO OIL. IS ACID PROOF AND FIREPROOF.

For very best results when repairing cracks and sealing joints on castings or flue pipes wipe all dirt and dust from the metal. Apply a thin layer of Furnace Cement covering all openings and press tightly into the section or parts being repaired or sealed.

NET WEIGHT ONE POUND

