





ILG Electric Ventilating Co.

2876 North Crawford Ave., Chicago 41, Ill.


Offices in More Than 40 Principal Cities

Horizontal Type Unit Heaters—have ILG-built Self-Cooled Motor which counteracts coil heat—never “slow roasts.” Graduated, 2-piece, cast iron header gives “balanced” steam distribution. Brass orifice bushings expand tubes uniformly in header plate. Copper fins are pressed into round copper tubes for permanent union—no brazing, soldering, or welding. Bottom header “floats” to permit expansion and contraction of coil independent of casing. Tested and Rated according to codes of I.U.H.A. and A.S.H. V.E. Ratings certified by I.U.H.A.—“One-Name-Plate” Guarantee. Wide range of sizes and capacities.




Low-Ceiling Type

For vertical mounting in buildings where headroom is at a premium. Side inlets and outlets at top and bottom assure extremely compact installation.



Vertical Type

Recommended for installations with extremely high or extremely low ceilings. Air diffusers or deflectors available to direct flow of heater air.




Textile Type

More tubes, no fins—for textile mills and applications where lint or other material normally adheres to fin surfaces and clogs up coil.

ILG Electric Unit Heaters


STANDARD TYPE



For instant, clean, safe, dependable heating. Coil is of black heat type which operates below 400 degrees. Protected against excessive temperature rise by patented automatic thermal cut-out and magnetic starter. Sizes 5 to 15 KW.

TYPE “HT”

For installations requiring a small volume of heat. Exceptionally efficient. Suitable for constant duty. Non-overheating black heat type coil with individually interchangeable elements. Sizes 1½ to 4 KW.



For ILG Propeller and Centrifugal Fans, see page 1163

1078



MANUFACTURING COMPANY

HASTINGS

NEBRASKA

SINCE 1914

New and Improved Self Contained Air Conditioning Units—for use with cold water. Capacities From 1 Ton to 20 Tons with Comparable Capacities for Heating.

Models for Cooling Include Floor Type for Individual Rooms, Suspended Units and Central Plants for Duct Systems.

Centrifugal Unit Heaters, Package and Utility Blowers for Heating and Ventilating

● **Central Plants**—capacities from 3 tons to 24 tons. Air delivery from 1100 cfm to 10,000 cfm. All central plants are assembled in sections to simplify installation. All models available with steam coils for combination heating and cooling.



● **Package Blowers**—capacities 1000 cfm to 4000 cfm. All models equipped with filters and available with or without fan controls. Cabinets of extra heavy steel construction with featherweave finish or with base coat for finishing in special colors.

● **Suspended Models**—capacities from 1 ton to 4 tons. Air delivery 585 cfm to 2200 cfm. Especially adaptable to individual rooms where duct system is undesirable. Completely self-contained with motor, coils, blower and filters housed in sturdy steel cabinet with attractive featherweave finishes.

● **Utility Blowers** both single—twin mounted double inlet type—capacity from 800 cfm to 10,000 cfm. Available in any discharge arrangement and with or without motors. Single blowers available in “base type” which includes heavy angle frame for special cabinet construction when necessary.

● **Floor Type Models**—capacities from 1 ton to 3 tons. Designed for use in individual rooms. All models self-contained with motor, blower coil and filters housed in well designed metal cabinets attractively finished or available in base coat for finishing in special colors.

● **Unit Heaters**—capacities from 76,800 to 155,000 Btu/hr. std. rating, air delivery 1165 cfm to 2100 cfm. Centrifugal type for use with steam or forced circulated hot water. Unusually quiet in operation—highly efficient and easily adaptable to duct installation. Finished in attractive featherweave or base coat for special colors.

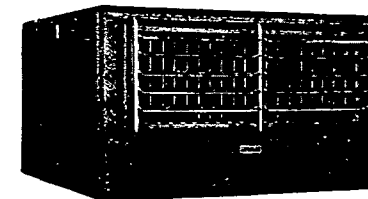

WRITE FOR CURRENT
SPECIFICATION CATALOG

1079