


Custom-Built... CONTINUOUS BLOWDOWN

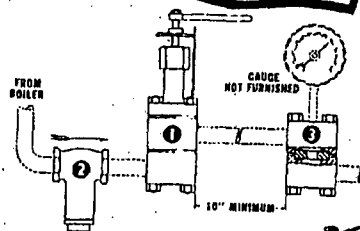

STRONG Dual-Orifice Assembly gives Greater Accuracy . . . Rugged Service!

Strong's Continuous Boiler Blowdown Assembly includes a Strong black steel Everite® Valve (1), a strainer (2) and an orifice block (3), custom-built and accurately sized for your own job conditions.

The assembly is essentially two orifices arranged in series. The first orifice (valve) is variable . . . the second is fixed. Correct proportioning of orifices provides extremely accurate control and reduces wire drawing.

Strong Everite steel valves have special Anum-Metl X seats and discs of 750 Brinell surface hardness for long life. Available for pressures to 1500 psi and temperatures to 800° F. or 6000 psi non-shock cold service.

Let us custom-size your continuous blowdown system. Send for Catalog No. 68-1 and our Continuous Blowdown Check-Chart today!

Also available in outside screw and yoke.


©1956, Trade Mark

STRONG, CARLISLE & HAMMOND COMPANY

1393 West 3rd Street
Cleveland 13, Ohio

AMERICAN MATT
TRADE MARK

OTHER STRONG STEAM SPECIALTIES

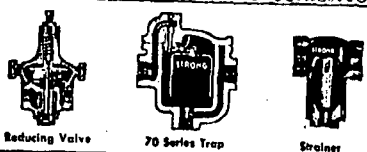

STRONG

More FREE BULLETINS

14 Caterpillar cable control, rear and front-mount, 8-page booklet. Cutaway views show advantages of No. 11 mounted unit and No. 11 rear-mounted controls. Form 1768A, General Electric Co., Schenectady 5, N. Y.

ELECTRICAL EQUIPMENT

15 Protective relaying of power lines. Discusses types of relays protecting generators, transformers, transmission lines, etc. Bulletin 1768A, General Electric Co., Schenectady 5, N. Y.

16 Electronic adjustable-speed drive from 1/2 to 1 hp described in 8-page bulletin. Photos, tables, cover hp-ratings, torque characteristics and other specs. Bulletin D-2111, Alliance Electric & Engineering Co., 19111 hoo Rd., Cleveland 12, Ohio.

17 Circuit breakers and their accessories over fused devices and in 8-page booklet. Discusses design, operating details, applications for types of enclosures. Booklet on company letterhead, Air Products Inc., 10000 E. 1st Ave., Pittsburgh 10, Pa.

18 Corrosion-resistant cable discussed in booklet titled *Wire and Cable for the Chemical Industries*. Spec data, photos and installation illustrations included. 12-112, General Electric Co., Schenectady 5, N. Y.

★ Magnetic amplifier, a regular power supplies for laboratory applications covered in 8-page bulletin. Describes high and low-voltage power supplies with regulations to 15%. Bulletin L-258, Stoughton Division, General Electric Co., 10000 E. 1st Ave., Pittsburgh 10, Pa.

19 Wound rotor motors, 1/2 to 100 hp, described with operation principles, performance curves, etc. Bulletin 1210, Louis Allis Co., Milwaukee 1, W.

20 Specialty transformers discussed in 8-page booklet. Covers design of specially transformers built from available components. Includes tailor-made. Booklet B-250, Air Products Inc., 10000 E. 1st Ave., Pittsburgh 10, Pa.

21 Cooling system of forced-air-cooled power transformer explained in 8-page, 4-page, illustrated bulletin. Discusses unit coolers, direct flow, cooling efficiency, flow selector control. Bulletin QEA 1189, General Electric Co., Schenectady 5, N. Y.

22 Electrodes of stainless, mild and high-temperature steel, cast iron, ferroalloy, low hydrogen, hardfacing described in 10-page, illustrated photo guide. Form ADC 480, Air Products Inc., 10000 E. 1st Ave., Pittsburgh 10, Pa.

23 Motor generators, 1/2 to 100 hp, covered in 8-page bulletin. Presents electrical specs and applications of 13 designs. Bulletin 10-100, Electric Products Co., 1711 Clarkstone Rd., Cleveland 13, Ohio.

24 New NEMA motor standards presented in 8-page bulletin. Passed by NEMA on May 19, standards set up new frame dimensions for motors from 1 to 10 hp. Bulletin QEA 1189, General Electric Co., Schenectady 5, N. Y.

25 Demand metering and the thermoeconomic application of demand meters presented in 10-page, illustrated manual. General Electric Co., Schenectady 5, N. Y.

26 Motor selection for ordinary applications of polyphase squirrel-cage induction motors explained in 10-page 4-color catalog. Presents electrical and mechanical modifications available for particular installation needs. Brochure 182, General Dynamics Corp., Shipbuilding Div., Dayton 1, Ohio.

27 Low-voltage capacitors for power factor correction discussed in 10-



View of Pipe bay in large eastern utility plant, showing pipes insulated with K&M "Featherweight" 85% Magnesia.

FOR ECONOMY'S SAKE



Insulate with "Featherweight" 85% MAGNESIA

Save heat and you save money. Thousands of plants depend upon "Featherweight" 85% Magnesia to do just that. And no wonder!

"Featherweight" needs no introduction to thousands of users, many of whom first experienced its unusual qualities before this century began.

It is a superb insulation, low in thermal conductivity and not only effective on heated surfaces with temperatures up to 600° F., but when used in combination

with K&M Hy-Temp Insulation, it is efficient up to 1900° F. This combination of double layers permits staggering all joints and eliminating heat loss through open joints when expansion occurs.

Keep this heat-saving, money-saving insulation in mind for applications in your company's plants. It will serve you well—always! For detailed information on "Featherweight" 85% Magnesia, see your local K&M distributor, who is an experienced applicator, or write directly to us.

Nature made asbestos . . .
Kearney & Mattison has made it
serve mankind since 1873



KEARNEY & MATTISON
COMPANY • AMBLER • PENNSYLVANIA

In Canada: ATLAS ASBESTOS COMPANY, LTD., MONTREAL, TORONTO, WINNIPEG, and VANCOUVER