

Refrigeration Appliances, Inc.

909 West Lake Street, Chicago 7, Illinois


MAKERS OF

AIR CONDITIONING AND REFRIGERATION
EQUIPMENT SINCE 1931



A—New Krack Air Cooled Condensers

Eliminate all water problems. Rust resistance minimizes maintenance. Easy, inexpensive installation. Multi-circulating at no extra cost. Semi-automatic belt adjustment; counter-flow refrigerant circuiting. Available in capacities up to 30 ton. Certified nominal capacities based on 110°F condensing temperature, 90°F ambient.

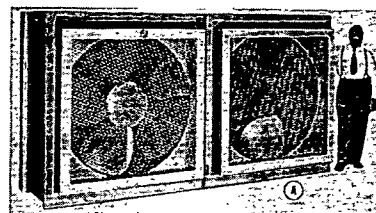


B—New Krack Comfort Masters

Quiet, remote type air conditioners. Models adaptable to practically all remote comfort cooling and heating uses. Designed for ceiling or floor mounting, use with or without ducts. Can be supplied without cabinets for furred-in installation. Volume control dampers and 3-speed control on fan motors give wide range of air velocity modulation. Wide choice of coil arrangements for direct expansion, water, steam, or combina-

tions. Sizes: 2 to 45 ton. Removable filters.

C—New Krack Furnace Bonnet Coils

Convert new or existing forced air furnace duct systems to summer cooling service with minimum installation problems. Compact V-bank arrangement of air-conditioning coils. Three models have 24,000, 36,000 and 60,000 Btu per hour nominal capacities.

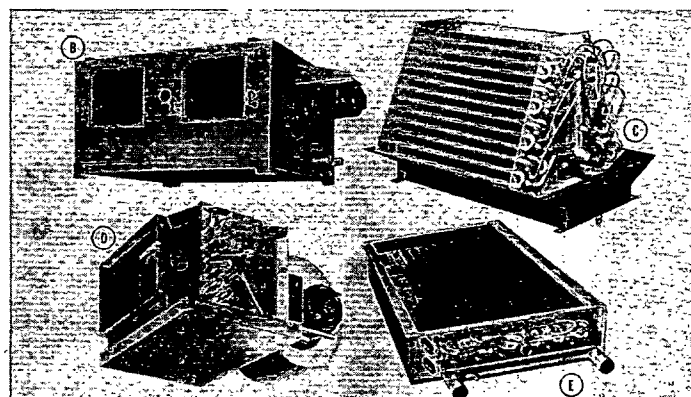

D—New Krack Transom Comfort Conditioners

Quiet, remote type cooler and heater for multi-room offices and commercial, institutional, and private housing. Direct expansion, chilled water, hot water. Optional 3-speed fan control. Two models handle 410 and 480 cfm.

Write for new detailed bulletins!

E—Krack Coils

Air-E-Fex series air conditioning coils . . . $\frac{3}{8}$ in., $\frac{1}{2}$ in., $\frac{5}{8}$ in., $\frac{3}{4}$ in. tube surfaces, for all sizes of installations, old or new. Patented construction features give increased strength, reduce static resistance.

Utility Fan Corporation

A Division of Utility Appliance Corp.

911 East 59th Street, Los Angeles 1, Calif.




Cable Address: UTILIFAN, Los Angeles

Manufacturers of heavy and standard duty blowers for heating, air conditioning and ventilating installations. Producers of blowers and blower parts for original equipment manufacturers.

Built, tested and rated in accordance with ASHAE and NAFM codes.


Sizes 6 inches to 60 inches.

Write for catalog data.




Heavy duty blower, Type "B" backward curved DWDI.

HEAVY DUTY BLOWERS, Double Inlet Double Width and Single Inlet Single Width, Forward and Backward Curved Wheels. Wheel diameters range in size from 12 inches to 60 inches. These blowers are of Class I construction, in any of ten drive arrangements and eight discharge positions.




Enclosed Drive Blower

NEW ENCLOSED DRIVE BLOWERS, sizes 10 inches to 36 inches, with fully enclosed drive compartment. Ideal for roof installation. The ED blowers are of the forward curved slow speed type, built for ease of installation and a minimum of maintenance.



Four-Way Blower

UTILITY'S FAMOUS "FOUR WAY" BLOWERS, designed by Utility, available in single width single inlet as well as double width double inlet. A simple change in bearing position makes it possible to obtain discharges in any of four directions. An economy unit for medium duty use, rigidly constructed and factory guaranteed.



Silent Direct Drive Blower

NEW SILENT DIRECT DRIVE BLOWER. By using vibration-absorbing Neoprene in the basic hub design, the blower wheel is isolated from the motor shaft. This unique development produces a very quiet blower. The direct drive blower is available in three wheel sizes providing a varied range of capacities, depending on motor horsepower selected.