

The International Boiler Works Company

500 Birch St., East Stroudsburg, Pa.

SALES OFFICES IN PRINCIPAL CITIES

FOR years "Fuel-Saver" Boilers Type C have met the requirements for low cost heating in office and apartment buildings, hotels, schools, theatres, industrial plants, etc.

Their design and construction makes them especially suitable for modern heating requirements:

QUICK STEAMING

Due to rapid and positive internal water circulation.

MAXIMUM HEAT ABSORPTION

Due to effective distribution of heated gases.

EASE OF CLEANING


Due to accessibility of heating surfaces.

"FUEL-SAVER" Boilers have cut fuel costs in thousands of heating installations.


Complete range of standard sizes rated in accordance with S.B.I.-15 lb A.S.M.E. standard—for hand, stoker, oil or gas firing.

Type C twin section—a heating boiler in halves. For installation where Type C one piece cannot be carried through existing passages.


Type KD—knocked down—a heating boiler designed for shipment so that sections can be carried through a door or window. Eliminates expensive cutting or patching of building. Reduces time out when in need of steam.

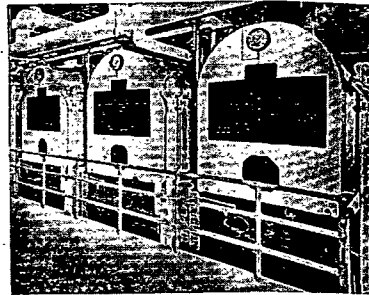

Typical Type C Installation




Halves of twin section ready for bolting

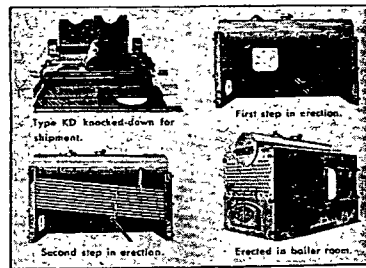

Type CR water-tube power boiler for processing and power. 100-125-150 s.w.p. A.S.M.E. standard.

Complete range of sizes—10 to 300 hp for hand, stoker, oil or gas firing.

**BOILER BUILDERS
SINCE 1886**

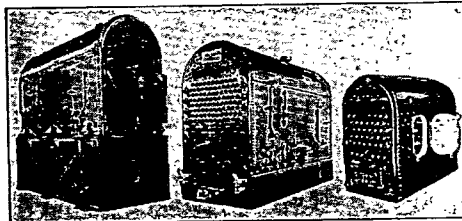

Write for bulletins
1302

Johnston Brothers, Inc.

ESTABLISHED 1864




Ferrysburg, Michigan



"PACKAGED"
STEAM BOILER UNIT
FULLY AUTOMATIC
HEAVY OIL

WATER-BACK TYPE.
FORCED DRAFT, THREE-PASS.
TROUBLE-FREE, EFFICIENT.




Rating guaranteed and overloads readily obtained.

HIGH PRESSURE TYPE from 50 to 500 hp and pressures of 125, 150 & 200 lb psi.

LOW PRESSURE TYPE for heating; 15 lb pressure, and EDR rating from 2190 sq ft to 42,500 sq ft steam.


A.S.M.E. Code construction. Ask for Bulletin 505.



Firebox Heating Boiler, Compact Type. Oil, Gas, Stoker or Hand Firing. Three-Pass 15 lb pressure, A.S.M.E. Code. Capacities 2190 to 42,500 sq ft, SBI rating. Ask for Bulletin 1500.

POWER, PROCESS, HEATING.

25 to 300 hp and pressures 15 lb to 200 lb psi. For mechanical firing with Coal, Gas or Oil. Overloads up to 200 per cent of rating readily developed. Oil or Gas firing equipment and controls can be installed for completely automatic operation and in emergency or fuel scarcity, can be readily converted to Coal firing.



Standard Scotch Boiler
Water-back Type,
Natural Draft.

Ask for Bulletin 4000