
NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

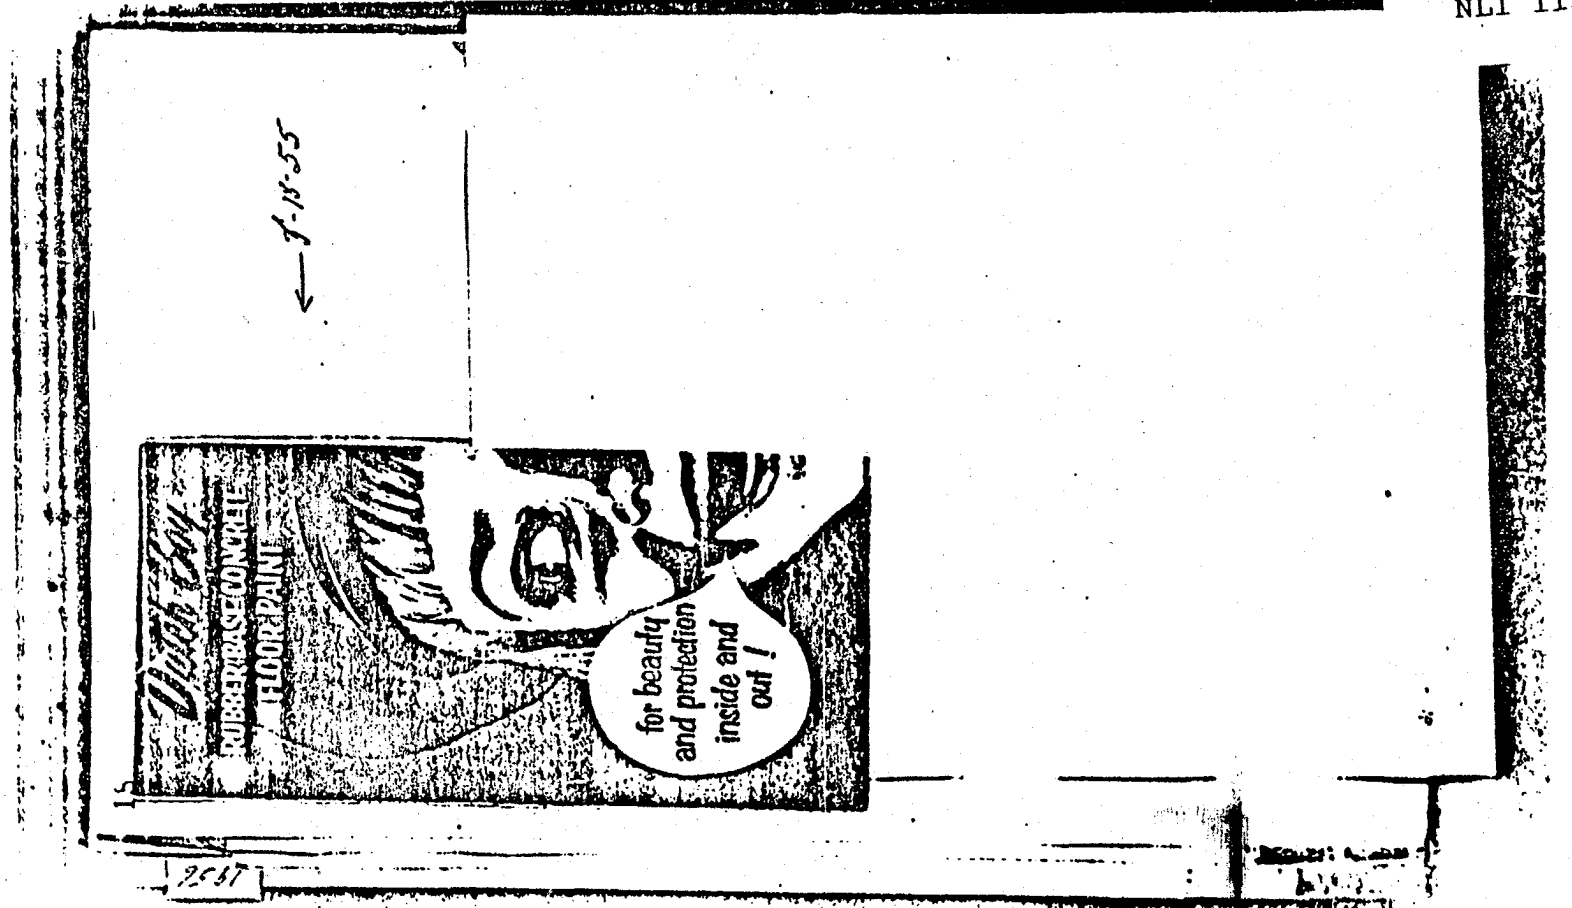

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

Dutch Boy RUB

GUN METAL

SANDALWOOD

BOTTLE GREEN

GOTHIC GRAY

REMBRANDT BROWN

TURF GREEN

PLACOUS

TILE RED

HOW TO USE "DUTCH BOY" CONCRETE FLOOR PAINT

Preparation of Surface

The surface to be painted must be clean and dry. Remove all dirt, oil, grease or wax before painting. Scrubbing the floor with an alkaline cleanser is recommended. Washing with solvent is one always effective as it may cause oil and grease to penetrate further into the concrete.

Allow new concrete to dry before painting. If new concrete has been treated with a hardener, or if old unpainted concrete has been worn smooth, these surfaces may be so smooth, dense and hard that paint may not adhere properly. Treat such surfaces by etching the concrete before painting. This may be done by using dilute solutions of acids, such as 10% muriatic acid solution, or by sprinkling "Sani-Flush" (about 1 lb. to 50 sq. ft.) or, the thoroughly wetted surface. Be sure to use proper precautions . . . these solutions are corrosive. Wear rubber gloves to protect hands, and wear rubbers on shoes. After etching the surface, rinse it thoroughly and be sure it is completely dry before painting.

On previously painted concrete, scrape and remove all loose and scaling paint. Spots of bare concrete may require etching.

Priming and Undercoating:

New or unpainted surfaces, or previously painted surfaces that are badly weathered or in poor condition, should be painted with one coat of "Dutch Boy" Concrete Floor Paint thinned with pure turpentine—one pint per gallon of paint. Allow this coat to dry overnight. Finish with one coat of paint without thinning.

Finish Coats

"Dutch Boy" Concrete Floor Paint is ready for use as a finish coat. Stir thoroughly before painting. If slight skinning is necessary, use only pure turpentine in small amounts.

00053

NLI 115946

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

Dutch Boy RUBBER BASE CONCRETE FLOOR PAINT

GUN METAL | SANDALWOOD | GAINSBOROUGH BLUE | HOT CHOCOLATE

BOTTLE GREEN | GOTHIC GRAY | CHINESE RED* | BRONZE NAVY

MAHOGANY BROWN | TURF GREEN | CASTLE GRAY | CHERRY*

PEACOCK | TILE RED | SEAL | ADIRONDACK

*These two colors as well as certain others in the Color Gallery are not available for sale on sale. Check with your Dealer.

New durable beauty!

"Dutch Boy" Concrete Floor Paint is made especially for masonry floors, indoors or outdoors ... for cement or concrete floors in basements, cellars, porches, laundries or garages ... for patios, porches or masonry steps.

The variety of colors now available in this product—all of the more than 100 Color Gallery hues—is the widest ever offered in this type of finish. Truly there is a selection of colors to satisfy every taste and need, from conservative and subdued tones to bright and gay ones.

"Dutch Boy" Concrete Floor Paint is highly resistant to alkalis, acid, grease, oil, alcohol, sweat, water, fumes and mildew. Easy to clean, this finish is unaffected by strong alkaline soaps and cleaning solutions, and it can be scrubbed repeatedly. It seals and preserves masonry against water, weather, chemicals and solvents, preventing dusting and the crumbling of cement and concrete and making it easy to keep clean and dry. Fast drying, too—which means floors can be put back into use in a very short time. Its hard, tough surface resists heavy foot traffic, scuffing and severe service.

The colors shown suggest only a few of the more than 100 colors available. See the complete variety in the Color Gallery at your "Dutch Boy" dealer's store.

00053

NLI 115947