PLAINTIFF'S EXHIBIT
CT-159

CERTAIN-TEED CALCULATOR

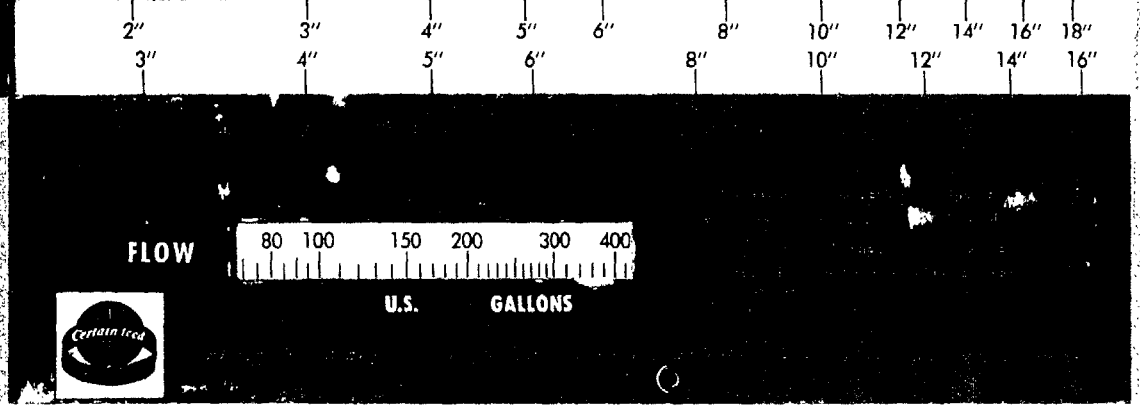

For sewage force main, water main and gravity sewer installations specify Certain-teed Asbestos-Cement Pipe and FLUID-TITE® Couplings.

- Tight Joints
- Smooth Bore
- Strong
- Durable
- Light Weight
- Easily Installed
- Workable
- Practically no Maintenance
- Immune to Electrolysis
- Corrosion Resistant
- Non-Tuberculating

PRINTED IN U.S.A.

DEF.15.01*027246

CERTAIN-TEED SEWER PIPE CALCULATOR

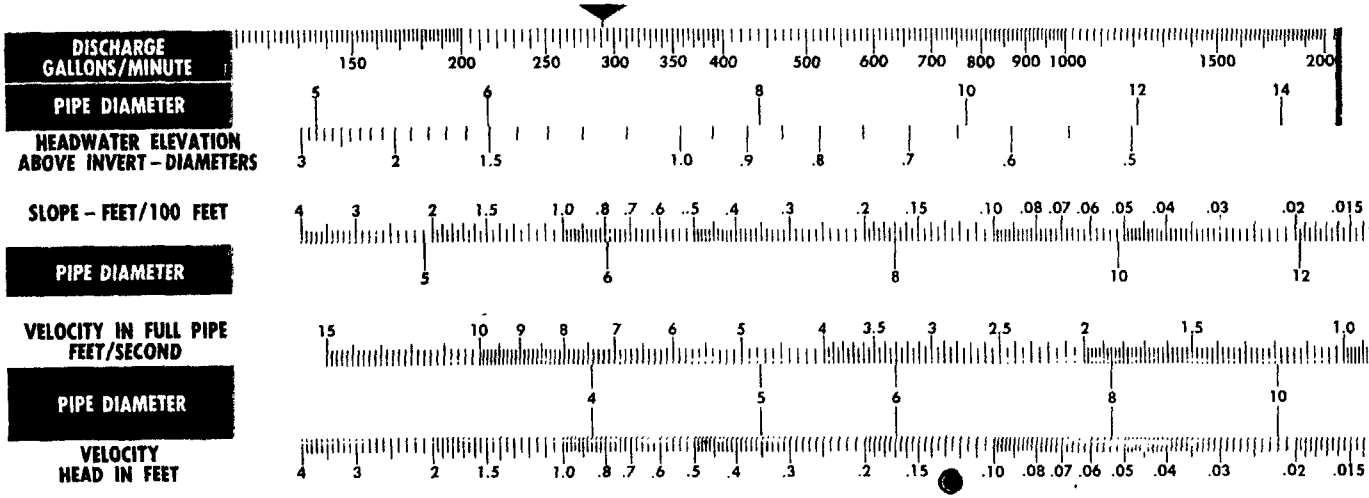

Set discharge under arrow.

Headwater elevation above invert, slope, Velocity and Velocity Head are shown as functions of pipe diameter.

Flow co-efficient N = .010 (Manning).

Certain-teed

Slide-Chart Copr. 1964, PERRYGRAF Corp., Maywood, Ill.