

ONE

GALLON


O'BRIEN'S

"75" HOUSE PAINT

FOR ANY EXTERIOR SURFACE

IVORY

Lead	54.92%
Iron	5.00%
Aluminum	2.00%
Flint	2.00%
Lead Zinc Oxide	35.53%
Magnesium Silicate	32.50%
*Zinc Oxide	100.00%
Micro Ball (Glass)	82.00%
Carbon Black	15.00%
Vehicles	100.00%
Resin	45.08%
Oil	41.73%
Thermalized Tung Oil	23.90%
Mineral Spirits & Diluents	5.48%
Less than 5% Tinting Color Added	28.89%

MADE IN U.S.A. BY THE O'BRIEN CORPORATION • SOUTH BEND, INDIANA • BALTIMORE, MARYLAND

O'BRIEN'S "75" HOUSE PAINT

O'Brien's "75" House Paint represents the very finest in top quality exterior paint. Made with patented Pre-Shrunk Thermolyzed Oils, it looks better longer on any type of exterior surface — wood siding, wood shingles, aluminum siding, fences, wood trim, asbestos shingles, stucco, brick, concrete, metal. Extra plus features which make this quality paint a standout and favorite among painters and homeowners include — unbelievable hiding, greater coverage, easier brushing and more years service.

"75" HOUSE PAINT PRIMING WHITE

This is a specially formulated undercoat for use on exterior surfaces under "75" House Paint and other similar products. It controls the penetration of the oils in the paint applied over it, and dries dull permitting fast application of the finish coat. Easy to apply, its tremendous hiding provides a perfect base for final coat.

NOTE — In normal painting weather (72 F. or higher) Priming White should be allowed to dry 48 hours before being painted over. When applied at temperatures below 70 F., add two fluid ounces of O'Brien's No. 1188 Drier to each gallon. Below 50 F., add four ounces. Do not use this material on interior surfaces.

"75" TINTING WHITE

This product has all the application and performance features of regular "75" House Paint except that it is to be used for tinting purposes only. Can be easily tinted with Pure Liquid Oil Colors or by intermixing with other standard redi-mixed "75" House Paint colors. Never use straight out of the bucket as a White color.

CAUTION! COMBUSTIBLE

KEEP AWAY FROM HEAT AND OPEN FLAME
Contains Lead or Other Compounds Harmful If Eaten
Do not apply on toys, furniture or interior surfaces which might be chewed by children. Use with adequate ventilation. Avoid breathing vapor or spray mist. Avoid prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use

DIRECTIONS FOR USE

FOR NEW UNPAINTED SURFACES

- 1st Coat — O'Brien's "75" House Paint Priming White.
Tint to approximate shade of finish coat.*
2nd Coat — O'Brien's "75" House Paint.

FOR OLD PAINTED SURFACES

- 1st Coat — O'Brien's "75" House Paint Priming White.
Tint to the approximate color of the finish coat.* (Note—This coat may be eliminated where time and cost necessitate a one-coat job.)
2nd Coat — O'Brien's "75" House Paint.
*For light colors tint Priming White with O'Brien's Oil Colors. For dark colors mix one-half Priming White and one-half "75" House Paint of the finish color.

GENERAL RECOMMENDATIONS

WEATHER — Outside painting should never be done when the weather is damp or the temperature below 60° F.

SURFACES — Surfaces to be painted should be perfectly dry and free of grease, oil, dust and loose dirt.
SPRAYING — "75" House Paint may be sprayed by an experienced operator.

DRYING — Allow at least 48 hours good drying weather between coats. When temperature is low, add two fluid ounces of O'Brien's No. 1188 Drier to each gallon.

Stir Paint Well Before and During Use. When Necessary — Thin with Turpentine or O'Brien's Reducit.


THE O'BRIEN CORPORATION

SOUTH BEND, IND. BALTIMORE, MD.
OKLA. CITY, OKLA. SAN FRANCISCO, CAL.

RECEIVED
4513
DATE

ONE

GALLON

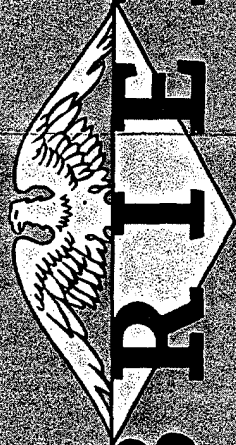

O'BRIEN'S

"75"

HOUSE PAINT

FOR ANY EXTERIOR SURFACE

BRAZIL BROWN

75 HOUSE PAINT - BRAZIL BROWN	
Pigment	34.56%
C. P. Brown Iron Oxide	37.48%
Magnesium Silicate	71.52%
Vehicle	100.00%
Heat Treated Linseed Oil	45.07%
*Varnish	36.36%
Mineral Spirit Oil	6.59%
Mineral Spirit & Driers	1.50%
Hydrogenated Naphtha	2.55%
	100.00%
*Varnish	
Non Volatile, Heat Treated Linseed Oil	
Thermolized Tung Oil, Modified Resin	59.58%
Volatiles, Mineral Spirits	40.42%
	100.00%

MADE IN U.S.A. BY THE O'BRIEN CORPORATION - SOUTH BEND, INDIANA - BALTIMORE, MARYLAND

O'BRIEN'S "75" HOUSE PAINT

O'Brien's "75" House Paint represents the very finest in top quality exterior paint. Made with patented Pre-Shrunk Thermolyzed Oils, it looks better longer on any type of exterior surface — wood siding, wood shingles, aluminum siding, fences, wood trim, asbestos shingles, stucco, brick, concrete, metal. Extra plus features which make this quality paint a standout and favorite among painters and homeowners include — unbelievable hiding, greater coverage, easier brushing and more years service. Tested and proven on thousands of homes, "75" House Paint is America's best house paint value.

"75" HOUSE PAINT PRIMING WHITE

This is a specially formulated undercoat for use on exterior surfaces under "75" House Paint and other similar products. It controls the penetration of the oils in the paint applied over it, and dries dull permitting fast application of the finish coat. Easy to apply, its tremendous hiding provides a perfect base for final coat.

NOTE—In normal painting weather (72 F. or higher) Priming White should be allowed to dry 48 hours before being painted over. When applied at temperatures below 70 F. add two fluid ounces of O'Brien's No. 1188 Drier to each gallon. Below 50 F. add four ounces. Do not use this material on interior surfaces.

WARNING: May contain lead compound. Wash thoroughly after handling and before eating or smoking. Avoid breathing dust. Do not take internally.

REGISTERED

REC'D. No. 4513

DATE 11-1-54

DIRECTIONS FOR USE FOR NEW UNPAINTED SURFACES

1st Coat — O'Brien's "75" House Paint Priming White thinned with two or three pints of raw linseed oil.

2nd Coat — Mixture of one-half "75" House Paint Priming White and one-half "75" House Paint of the finish color.*

3rd Coat — O'Brien's "75" House Paint.

* This coat may be eliminated where time and cost necessitate a two-coat job.

FOR OLD PAINTED SURFACES

1st Coat — O'Brien's "75" House Paint Priming White. Tint to the approximate color of the finish coat.**

2nd Coat — O'Brien's "75" House Paint.

** For light colors tint Priming White with O'Brien's Oil Colors. For dark colors mix one-half Priming White and one-half "75" House Paint of the finish color.

GENERAL RECOMMENDATIONS

WEATHER — Outside painting should never be done when the weather is damp or the temperature below 60° F.

SURFACES — Surfaces to be painted should be perfectly dry and free of grease, oil, dust and loose dirt. SPRAYING — "75" House Paint may be sprayed by an experienced operator.

DRYING—Allow at least 48 hours good drying weather between coats. When temperature is low, add two fluid ounces of O'Brien's No. 1188 Drier to each gallon.

Stir Paint Well Before and During Use. When Necessary — Thin with Turpentine or O'Brien's Reducit.

Inflammable — Keep Away From Fire

THE O'BRIEN CORPORATION
SOUTH BEND, IND. BALTIMORE, MD.
OKLAHOMA CITY, OKLA.