INSTALLING BRAKES ON COACH TRAILERS

NOTE: For installing on axles which do not have brake support plates order brake No. 1210.

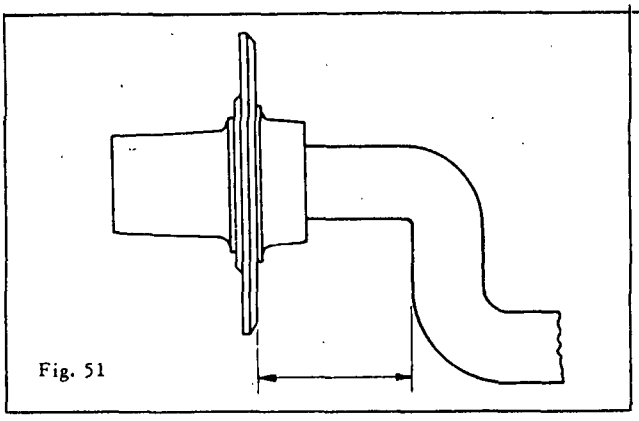


Fig. 51

A space 3-7/16" is required. Brakes can be installed at any point indicated above.

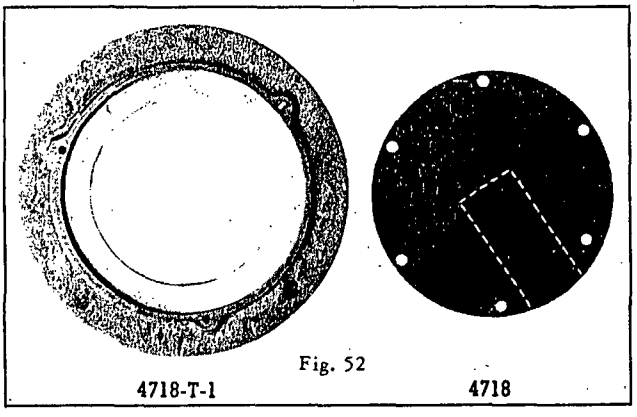


Fig. 52

After drums are fitted to hub, fixture No. 4718-T-1 is then inserted in drum. Hub and drum is placed on axle in normal position. Fixture automatically indicates exact position of brake support plate No. 4718 and holds it in position while it is being welded to axle. Brake support plate No. 4718 must be cut from axle clearance as indicated.

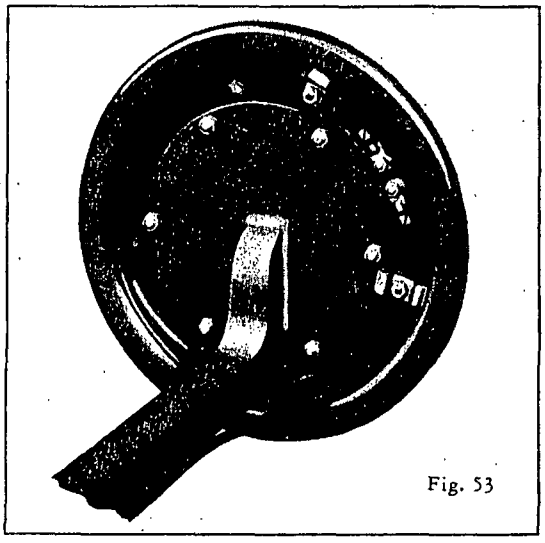


Fig. 53

Installation of brake No. 1210 completed.

EMERGENCY BREAK-AWAY ASSEMBLY

SAFETY SWITCH HOOK-UP ACCESSORY No. 3381

Coupling Cable, Socket and Safety Switch not included with accessories

