


OCC 3584

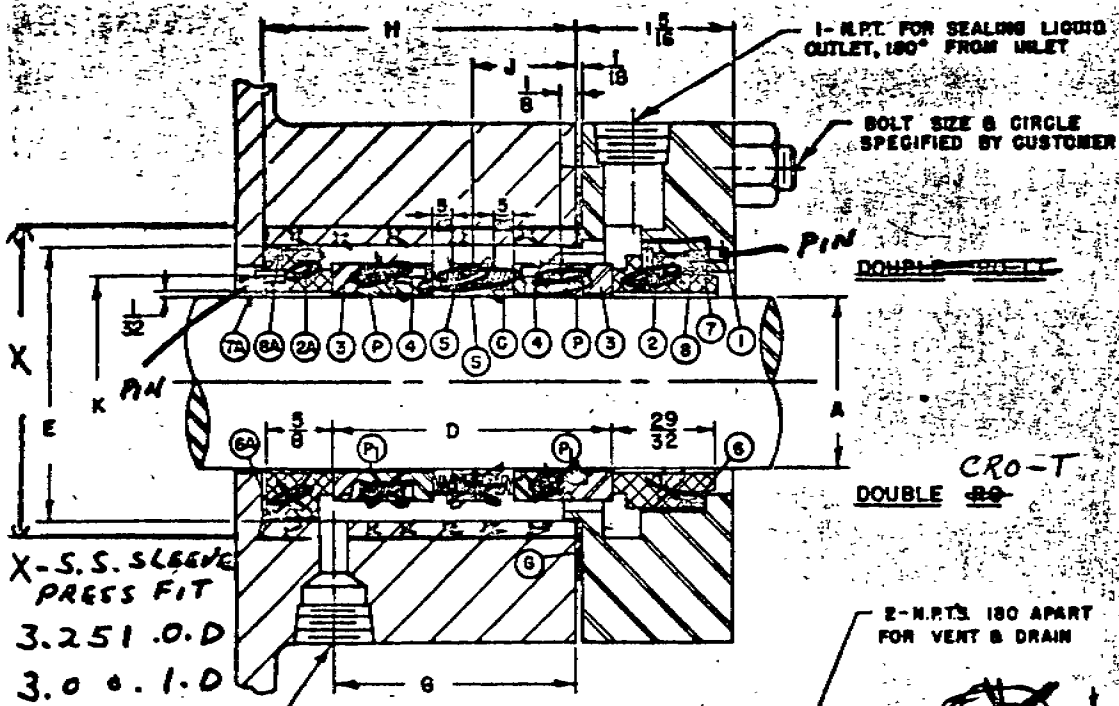

1.001	A	G	D	2.005	E	F	G	MIN.	H	J	DIA.	L	X
750	.875	2 1/16	1.625	1.500	1 1/16	2 1/16	2 1/16	2 1/16	1.109	1.265			
.812	.937	"	1.687	1.562	"	"	"	"	1.172	1.328			
.875	1.000	"	1.750	1.625	"	"	"	"	1.234	1.390			
.937	1.062	"	1.812	1.687	"	"	"	"	1.297	1.453			
1.000	1.125	"	1.875	1.750	"	"	"	"	1.359	1.515			
1.062	1.187	2 1/16	1.937	1.812	2 1/16	2 1/16	2 1/16	2 1/16	1.422	1.578			
1.125	1.250	"	2.000	1.875	"	"	"	"	1.422	1.515			
1.187	1.312	"	2.062	1.937	"	"	"	"	1.484	1.578			
1.250	1.375	"	2.125	2.000	"	"	"	"	1.547	1.640			
1.312	1.437	"	2.187	2.062	"	"	"	"	1.609	1.703			
1.375	1.500	"	2.250	2.125	"	"	"	"	1.672	1.765			
1.437	1.562	"	2.312	2.187	"	"	"	"	1.734	1.828			
1.500	1.625	"	2.375	2.250	"	"	"	"	1.797	1.890			
1.562	1.687	"	2.437	2.312	"	"	"	"	1.859	1.953			
1.625	1.750	2 1/16	2.500	2.375	2 1/16	2 1/16	2 1/16	2 1/16	1.922	2.015			
1.687	1.812	"	2.562	2.437	"	"	"	"	1.984	2.078			
1.750	1.875	"	2.625	2.500	"	"	"	"	2.047	2.140			
1.812	1.937	"	2.687	2.562	"	"	"	"	2.109	2.203			
1.875	2.000	"	2.750	2.625	"	"	"	"	2.172	2.265			
1.937	2.062	"	2.812	2.687	"	"	"	"	2.234	2.328			
2.000	2.125	"	2.875	2.750	"	"	"	"	2.297	2.390			
2.062	2.187	"	2.937	2.812	"	"	"	"	2.359	2.453			
2.125	2.250	"	3.000	2.875	"	"	"	"	2.422	2.515	3.25		
2.187	2.312	"	3.062	2.937	"	"	"	"	2.484	2.578			
2.250	2.375	"	3.125	3.000	"	"	"	"	2.547	2.640			
2.312	2.437	"	3.187	3.062	"	"	"	"	2.609	2.703			
2.375	2.500	"	3.250	3.125	"	"	"	"	2.672	2.765			
2.437	2.562	"	3.312	3.187	"	"	"	"	2.734	2.828			
2.500	2.625	"	3.375	3.250	"	"	"	"	2.797	2.890			
2.562	2.687	"	3.437	3.312	"	"	"	"	2.859	2.953			
2.625	2.750	"	3.500	3.375	"	"	"	"	2.922	3.015			
2.687	2.812	"	3.562	3.437	"	"	"	"	2.984	3.078			
2.750	2.875	"	3.625	3.500	"	"	"	"	3.047	3.140			
2.812	2.937	"	3.687	3.562	"	"	"	"	3.109	3.203			
2.875	3.000	2 1/16	3.750	3.625	2 1/16	2 1/16	2 1/16	2 1/16	3.172	3.265			

THE DIMENSIONS SHOWN ARE THE
RECOMMENDED MINIMUM FOR THIS
TYPE OF ARRANGEMENT

DURAMETALLIC CORPORATION
KALAMAZOO, MICH.

SHEET 1 OF 2

DATE 3-5-63 SCALE NONE



DESIGNER W.M.

TRACED

CHECKED L.H. 2-7-63

Draw. No. 20-46,145

NOTE: STUFFING BOX- BORED AND SLEEVED W/ 316 S.S.

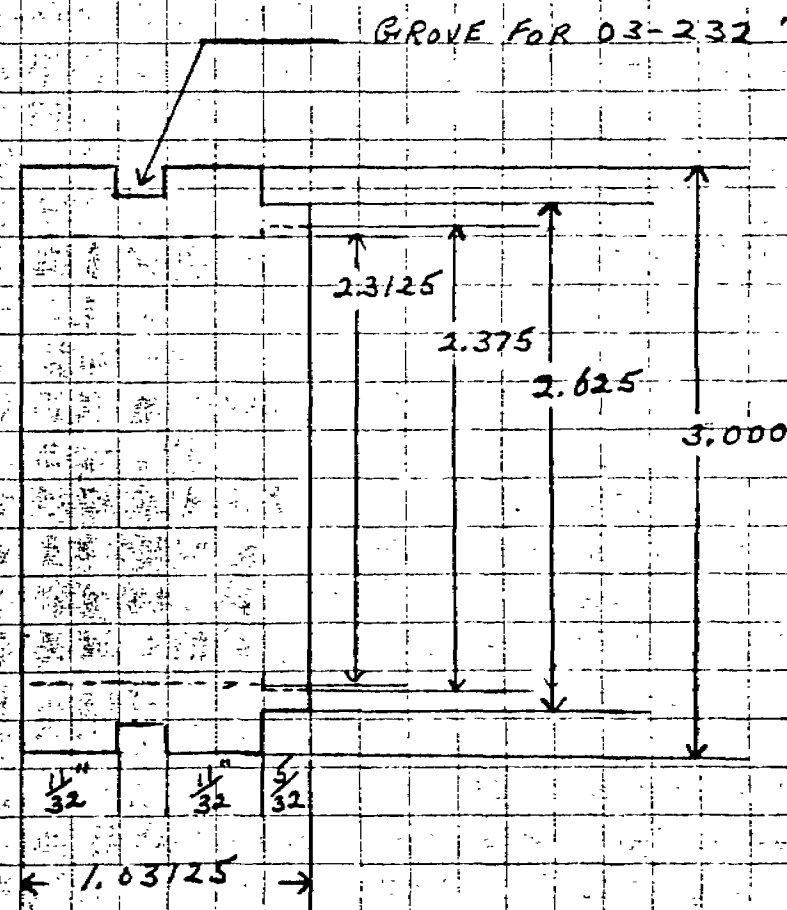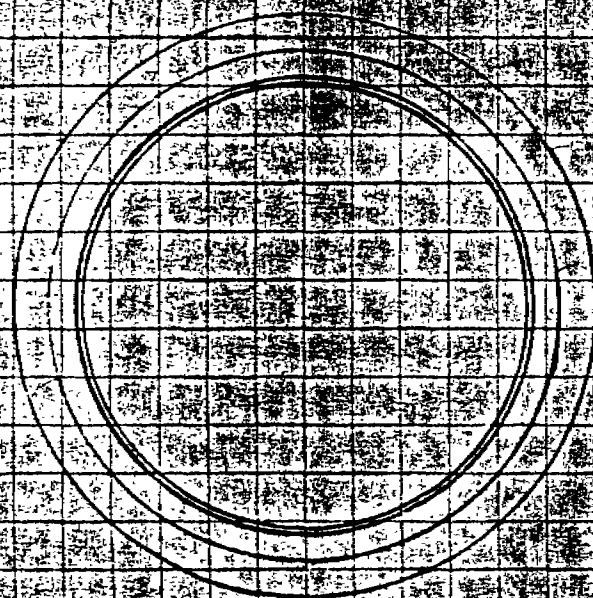


GROVE FOR O3-232 "O" RING

SEAT - BEARIUM METAL

FOR NASH HYTOR VACUUM
PUMP SIZE CL 402


DCC 3585

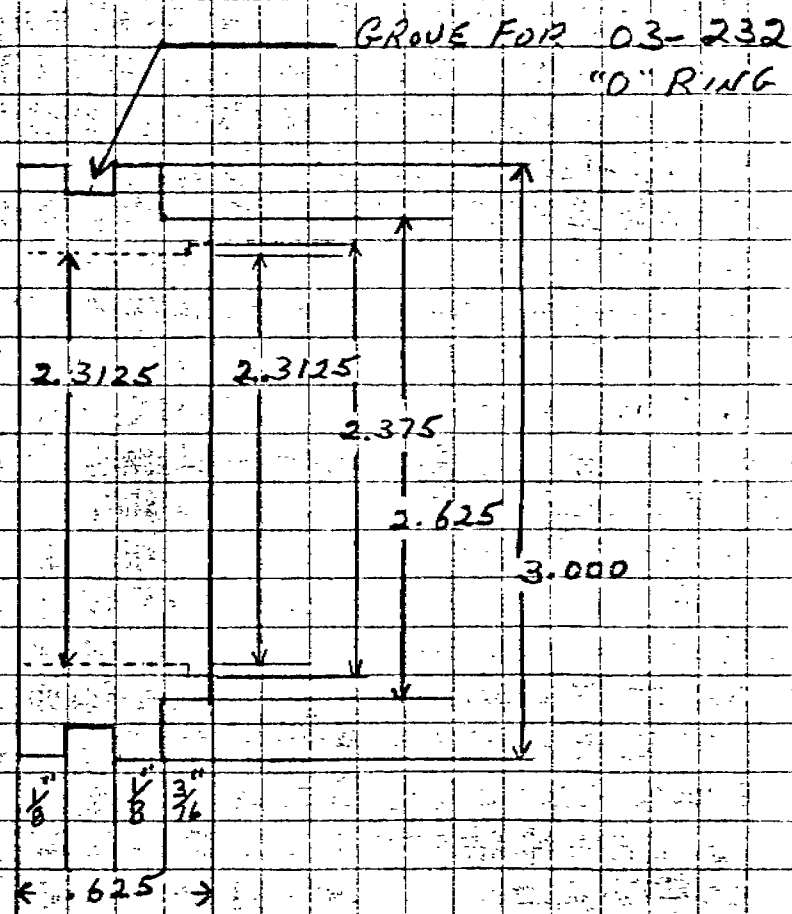

SEAT - BARIUM METAL


FORNASH HYTOR VACUUM
PUMP-SIZE CL 403

00C 3586

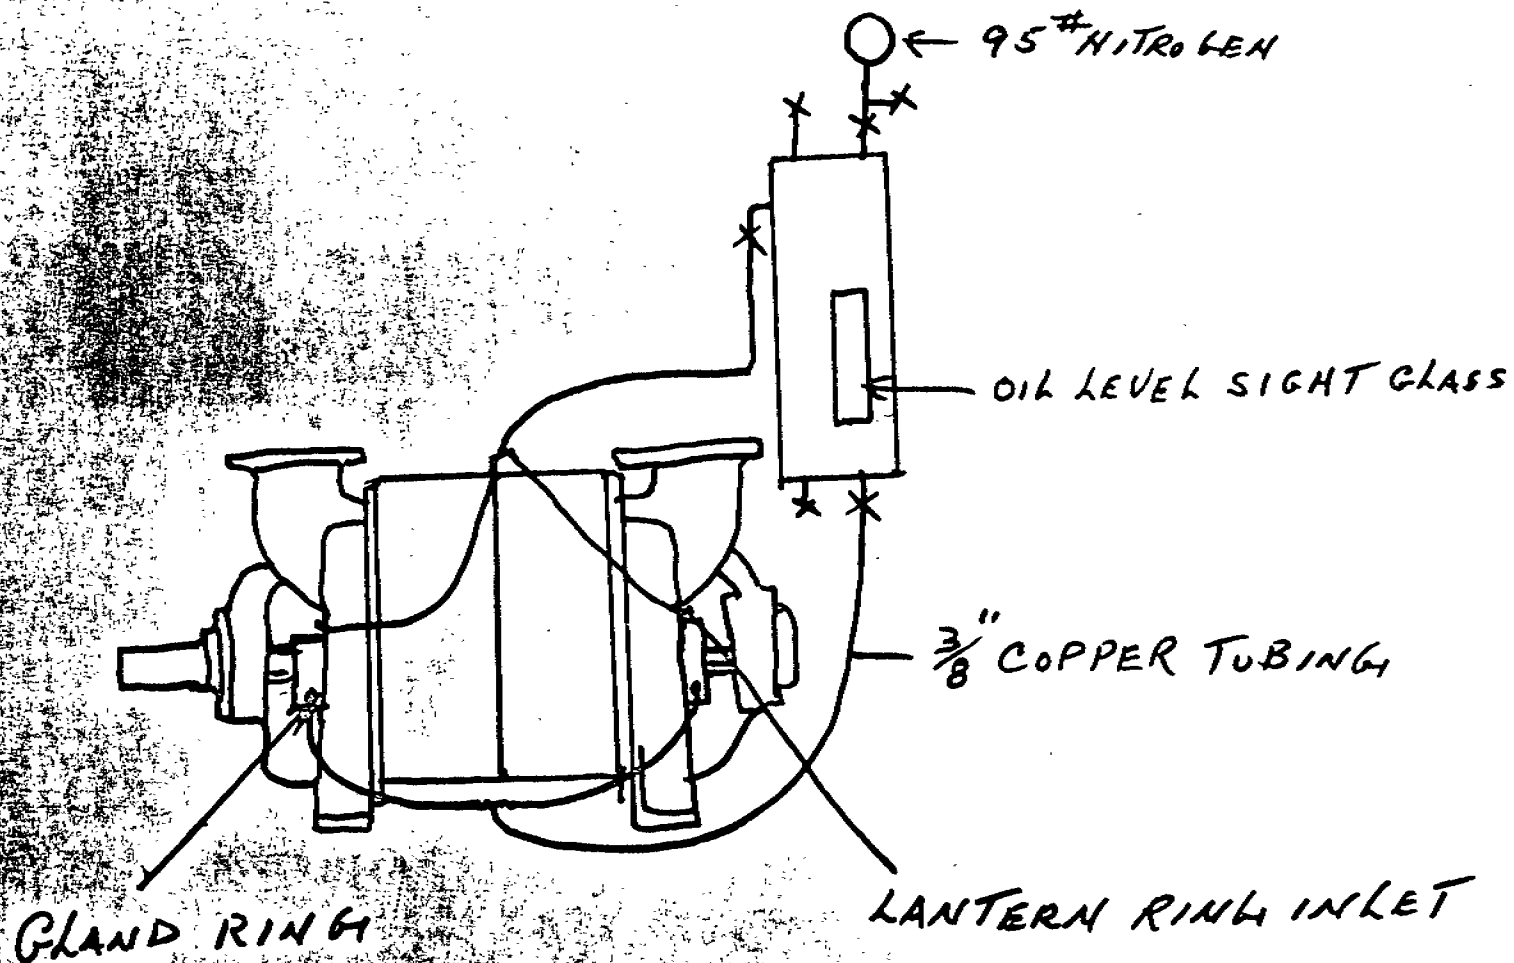

OIL TYPE: INDUSTRON 66

NASH HYTOR VACUUM PUMP
CL 400

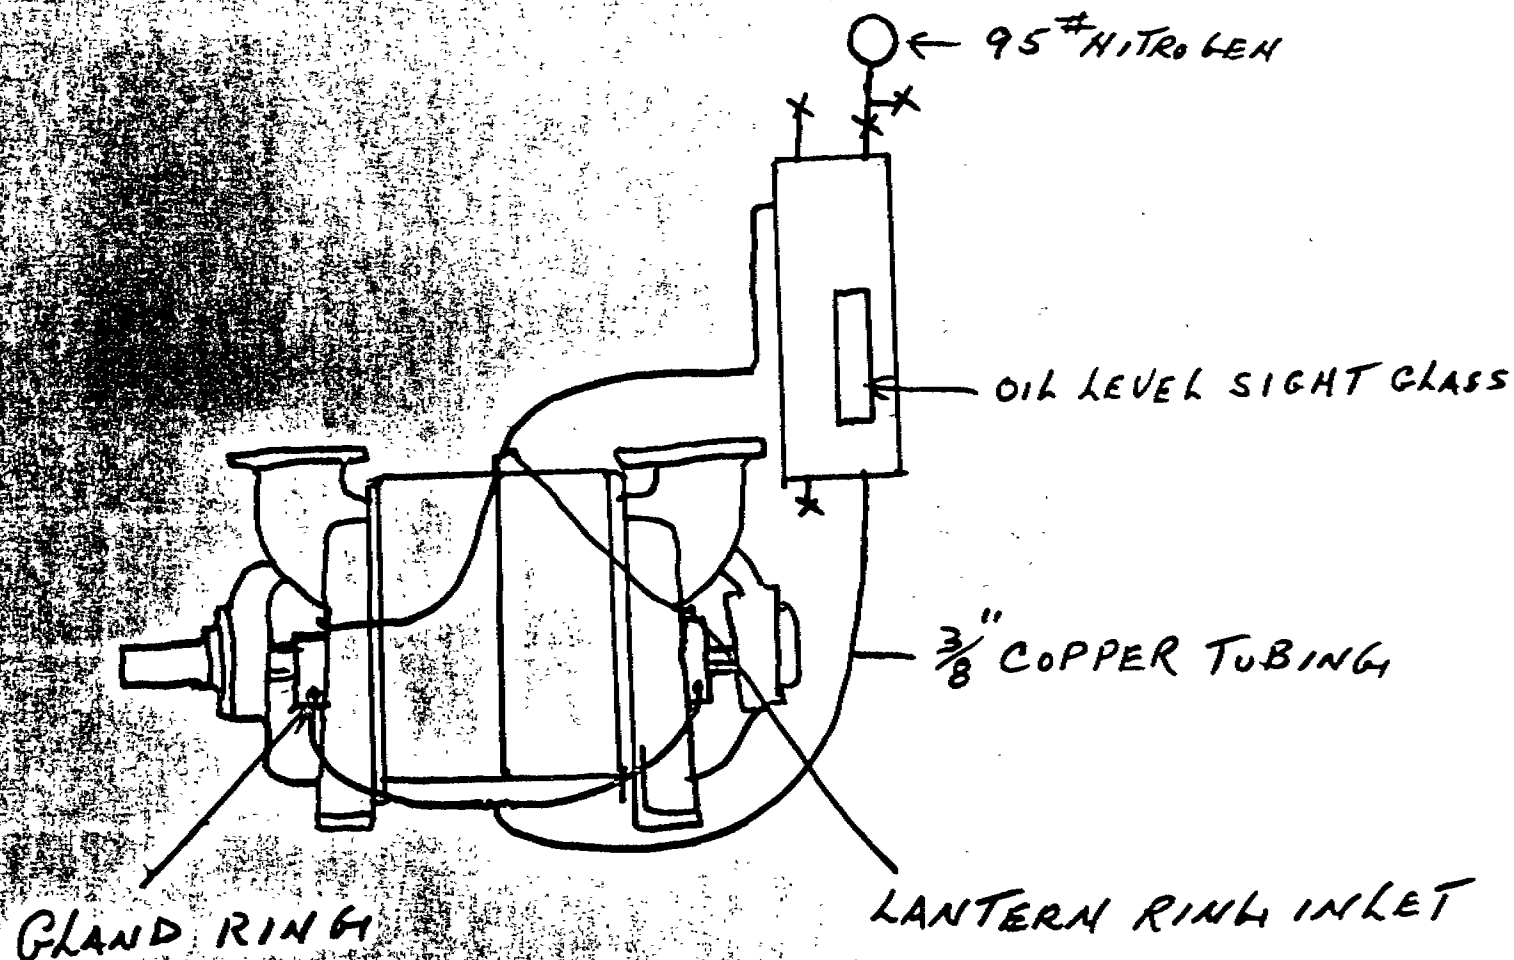

OIL TYPE: INDUSTRON 66

NASH HYTOR VACUUM PUMP
CL 400