

INSTALLATION

Suggestions for the improvement of our installation and construction methods submitted at our group sales meetings and approved by the Engineering Department.

IMPROVEMENT


The suggestion described in this particular bulletin was submitted by:

J. J. Bower, Sr.

BULLETIN

Bulletin No. 19

February 25, 1932

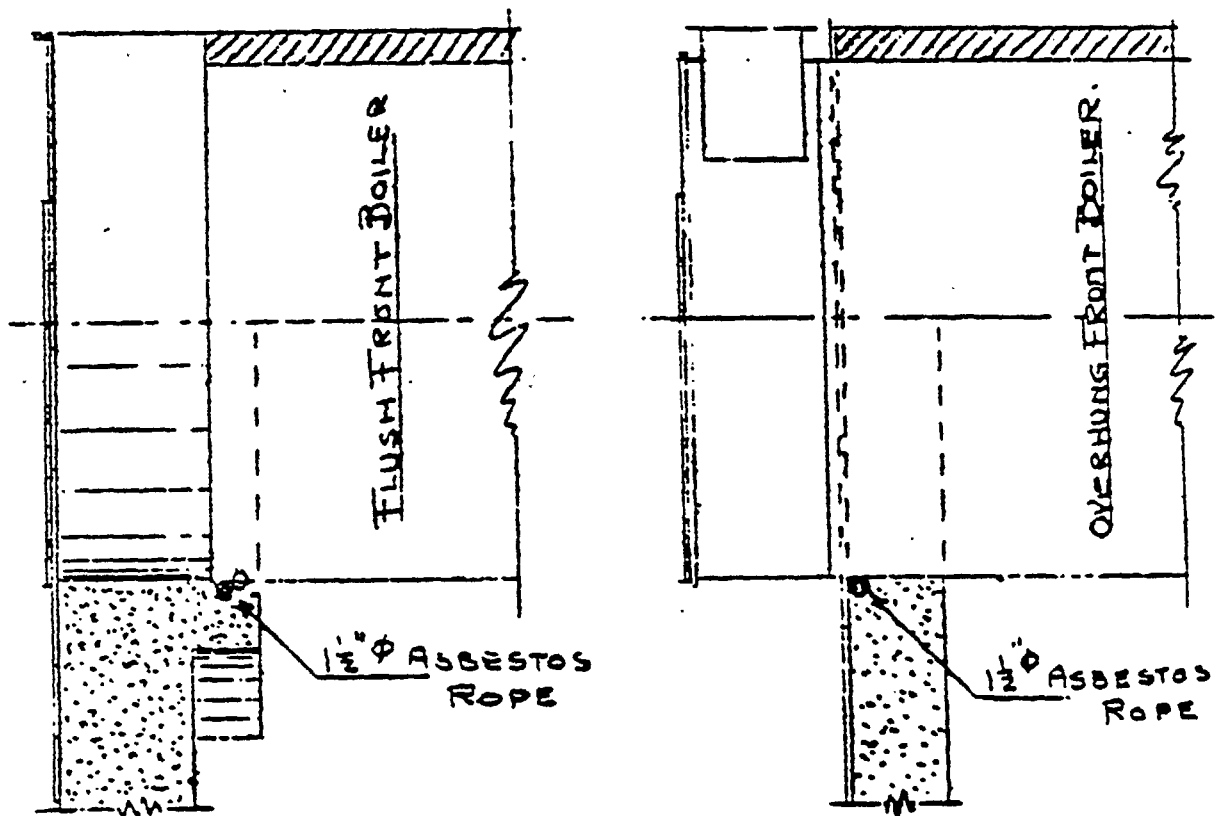

The use of asbestos rope as a seal between the boiler shell and the Filbrico front has been advocated by Mr. J. J. Bower of Roanoke, Virginia. Mr. Bower has been using asbestos rope in this manner for some time and reports excellent results.

We are of the opinion that this is very good practice and recommend it to you for general use.

**PLAINTIFF'S
EXHIBIT**

PLI-15