


NEG. NO. T-11

## TRADEMARK FILE INFORMATION

Trademark: Powerite  
Trademark Owner: Argo Asbestos & Rubber Corp.  
Last Assignee: Argo Packing Co., Inc.  
Date of First Use in Commerce: March 1, 1924  
Registration No.: 228,566  
Date Trademark Registered: June 7, 1927  
Size of Label in Trademark File: N/A



Receipt of Pictured Label by Patent Office:

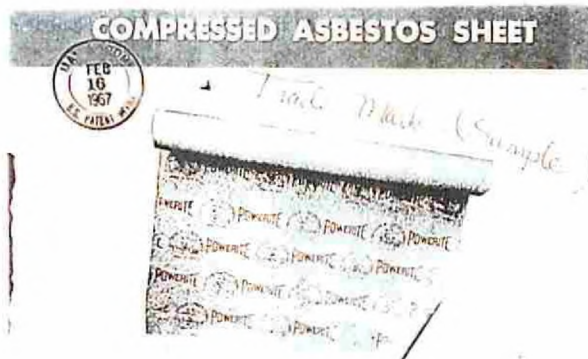

### POWERITE No. 350

| DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                       | THICKNESS                                                                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| POWERITE is made of superior grade long asbestos fibers and is best suited for use in the power industry. The proper combination of asbestos and binding materials thoroughly mixed and pressed together under vacuum pressure has produced a sheet that is pliable, resilient, and guaranteed to be the most perfectly constructed and strongest compressed asbestos sheet on the market today. It has an average tensile strength of 1000 lbs. per square inch. | 1/8" x 3/16" x 1/4" x 3/8" x 1/2" x 5/8" x 3/4" x 1"                                |
| RECOMMENDATIONS                                                                                                                                                                                                                                                                                                                                                                                                                                                   | SHEET SIZE                                                                          |
| POWERITE, because of its superior quality, can be used for most high-temperature and high-pressure requirements. Under proper conditions Powerite is withstanding high temperatures of 1500° F. Its superior strength holds itself in place during and is recommended for use in uncoated and superheated steam, acid, alkalis, gasoline type solvents, and oils at high temperatures.                                                                            | 36" x 36"<br>36" x 48"<br>36" x 72"                                                 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | APPROXIMATE WEIGHTS                                                                 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 36" x 36" x 1/8" --- 33.4<br>36" x 36" x 1/4" --- 20.9<br>36" x 36" x 1/2" --- 60.8 |