


there *IS* a difference*

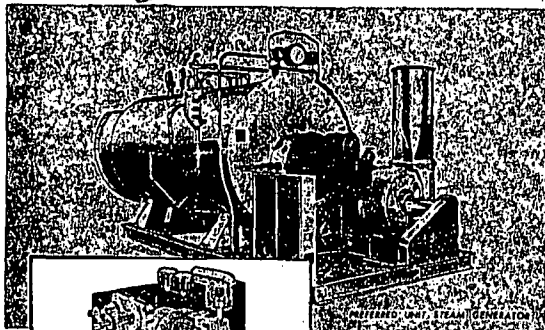

* Voluvalve Fuel Regulator... another 25 year built in Preferred "Quality Feature" that means accurate, efficient combustion.

when you're burning BUNKER "C"

Preferred's Unit Steam Generator handles any and *all* the variations of Bunker "C" and No. 6 oil that are coming through these days from catalytic cracking... and they do it *better* and *more* *efficiently* than any other unit steam generator on the market because—

* *No other unit has Preferred's "Voluvalve" Fuel Regulator!* In conjunction with a constant displacement pump the "Voluvalve" — through *positive*, reciprocal proportionate gearing—supplies an exact and accurately metered amount of oil to atomizer or fuel feed system.

* *No other unit has Preferred's High-Speed Atomization* —taking the metered fuel, Preferred's rotary cup speeds at 4600 RPM and easily atomizes the most viscous oil to a fine spray. Higher air velocities provide for greater collision effect and better atomization and allow complete control of spray angulation for carbon-free operation.

Write or call for complete details of "quality features" described in Bulletin 2000.




PREFERRED UTILITIES MFG. CORP.
1860 BROADWAY • NEW YORK 23, N.Y.

More EQUIPMENT NEWS

side water supply, provides a supply of cooled water at proper operating pressure. Scaled-in water coolant prevents clogging and corrosion.

Warm water is forced through mobile-type radiators, while a high blower draws outside air through the radiators. The water is quickly cooled and returned to the air conditioner in a continuous cycle. Unit weighs 350 lb., 8.3 sq ft of floor space.

Chrysler Corp., Airtamp Div., 341 Massachusetts, Detroit, Mich.




Boiler Level Indicator

343 • This 12 in. dial indicator, mounted on the differential pressure principle, can be mounted on a panel or pipe and, bringing the dial to convenient level.

Indicator is available in various sizes, ranges from 0-20 to 0-200 in. of water. Forged steel body has a rated working pressure of 2000 psi; parts are factory tested for safety at 4000 psi. Bulletin 392, Foxboro Co., Foxboro, Mass.


For more data on these items, use page 163. Identify your request with item number.



Multi-Speed Motors

352 • Motors are available in either 1 or 4-speed ratings, in either constant or variable-torque, or constant horsepower types. Two-speed motors have either one or two windings. 3- and 4-speed motors have two windings. Sizes range from 1/2 to 150 hp.

Multi-speed motors can be furnished either standard, totally-enclosed, or

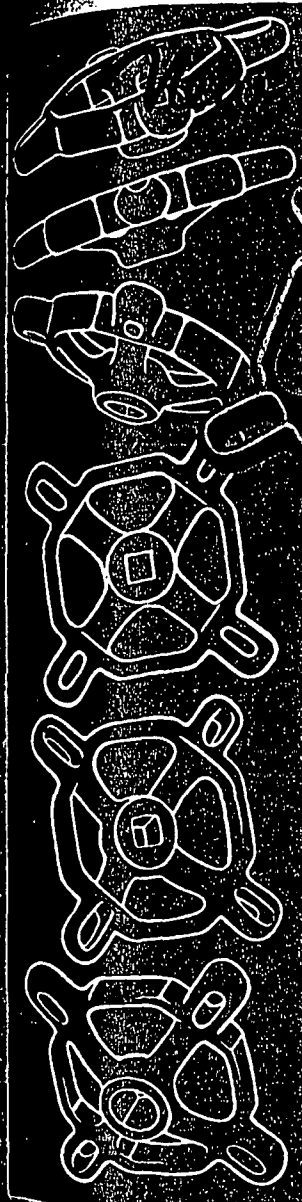

LUNKENHEIMER "non-slip" HANDWHEEL

**CLOSES
VALVES
TIGHT!**

With this revolutionary new handwheel design, *ordinary hand pressure closes the valve absolutely tight, thus preventing leakage.*

Rounded lugs provide a firm, comfortable, secure grip, even when the operator's hand is wet or greasy. And the "Non-Slip" Handwheel stays cool — does not transmit excessive heat to the outer rim. Operator's hand cannot touch the top of the valve stem, which may be hot.

Only Lunkenheim Valves have the new malleable iron "Non-Slip" Handwheel. Ask for a demonstration of its amazing performance. Hear how it will save you money by eliminating one of the most common causes of valve leakage.

WRITE FOR new bulletin describing the advanced "Non-Slip" Handwheel and demonstrating its outstanding features. The Lunkenheim Company, Box 360A, Cincinnati 14, Ohio.



BRONZE • IRON • STEEL

LUNKENHEIMER
THE ONE *Great* NAME IN VALVES

L-752-A