

Anthracite

Anthracite is a clean, dense, hard coal which creates very little dust in handling, is comparatively hard to ignite but burns freely when well started. It is non-caking.

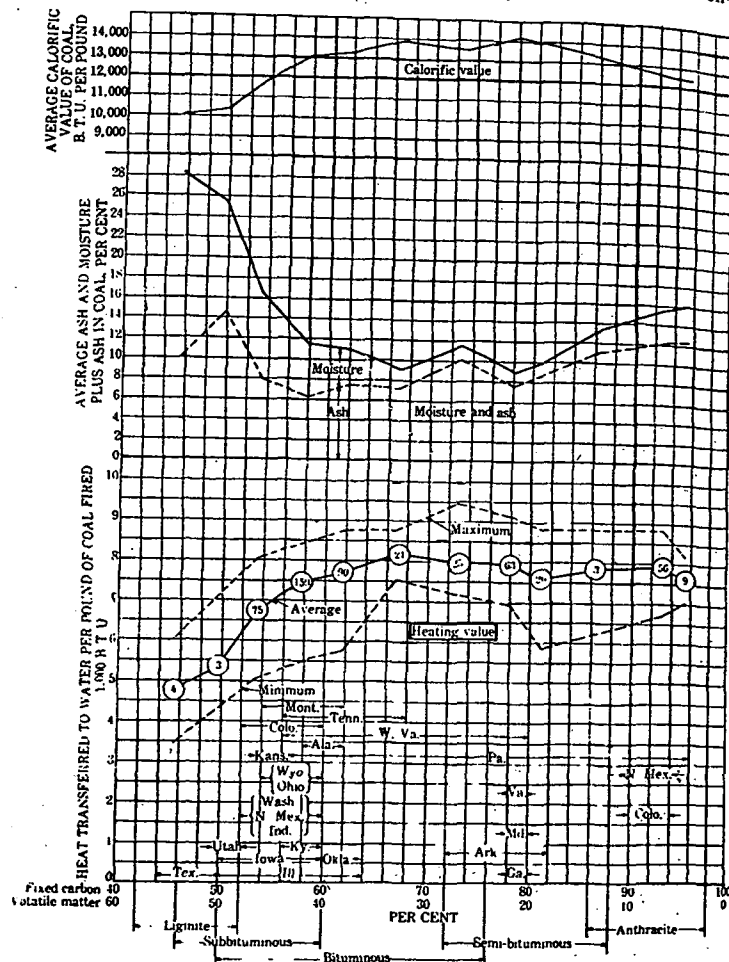


FIG. 1. RELATIVE HEATING VALUES OF COALS WITH CORRESPONDING CALORIFIC VALUES AND PER CENT OF MOISTURE AND ASH

burns with a short flame, creates very little smoke, burns uniformly and the fuel beds require little attention between firings. It is capable of giving a high efficiency in the common types of hand-fired furnaces.

Semi-Anthracite

Semi-anthracite has a higher volatile content than anthracite, is not as hard and ignites somewhat more easily; otherwise its properties are similar to those of anthracite.

Semi-Bituminous Coal

Semi-bituminous coal is soft and friable, and fines and dust are created by handling. It ignites somewhat slowly and burns with a medium length of flame. Its caking properties increase as the volatile matter increases, but the coke formed is relatively weak. Having only half the volatile matter-content of the more abundant bituminous coals it can be burned with less production of smoke, and is sometimes called *smokeless coal*.

Bituminous Coal

The term *bituminous coal* covers a large range of coals, and includes many types having distinctly different composition, properties and burning characteristics. The coals range from the high-grade bituminous coals of the East to the poorer coals of the West. Their caking properties range from coals which completely melt, to those from which the volatile and tars are distilled without change of shape, so that they are classed as non-caking or free-burning. Most bituminous coals are strong and non-friable enough to permit of the screened sizes being delivered free from fines. In general, they ignite easily, burn freely; the length of flame varies with different coals, but it is long. Much smoke and soot are possible and are difficult to reduce to reasonable amounts at low rates of burning.

Sub-Bituminous Coals

Sub-bituminous coals occur in the Western States; they are high in moisture when mined and tend to break up as they dry or when exposed to the weather; they are liable to ignite spontaneously when piled or stored. They ignite easily and quickly and have a medium length flame, are non-caking and free-burning; the lumps tend to break into small pieces if poked; very little smoke and soot are formed.

Lignite

Lignite is of woody structure, very high in moisture as mined, and of low heating value; it is clean to handle. It has a greater tendency than the sub-bituminous coals to disintegrate as it dries, and also is more liable to spontaneous ignition. Freshly mined lignite, because of its high moisture, ignites slowly. It is non-caking. The char left after the moisture and volatile matter are driven off burns very easily, like charcoal. The lumps tend to break up in the fuel bed and pieces of char falling into the ash pit continue to burn. Very little smoke or soot is formed.

COKE

Coke is produced by the distillation of the volatile matter from coal. The type of coke depends on the coal, or mixture of coals used, the temperatures and time of distillation and, to some extent, on the type of retort or oven; coke is also produced as a residue from the destructive distillation of oil.

High-Temperature Cokes

Coke as usually available is of the high-temperature type, and contains between 1 and 2 per cent volatile matter. High-temperature cokes are sub-divided into *beehive coke* of which comparatively little is now sold for domestic use, *by-product coke*, which covers the greater part of the coke sold, and *gas-house coke*. The differences between these three cokes are relatively small; their denseness and hardness decrease and friability increases in the order named. In general, the lighter and more friable cokes ignite and burn the more easily.

Low-Temperature Cokes

Low-temperature cokes are produced at lower coking temperatures, and only a portion of the volatile matter is distilled off. Cokes as made by various processes under development have contained from 10 to 15 per cent volatile matter. In general, these cokes ignite and burn more readily than high-temperature cokes. The properties of various low-temperature cokes may differ more than various high-temperature cokes because of the differences in the quantities of volatile matter and because some may be light and others are briquetted.