MD-3-A

PACKAGE TICKET (DRY AND PASTE ONLY)

CODE K0906 LOT 35800

NET WT/PKG	NO. PKG	PACK. WGT	LOCATION	PO
2525	1	T- 13		
2665	1	T- 145		
		STUMP Lumpo 5,012		

TOTAL NET WT. 5,190 PKG. N-CODE

PROD. SPVR.	DATE	WHSE. OPER.
JY	5/30/80	

CS454N

MD-3-A

PACKAGE TICKET (DRY AND PASTE ONLY)

CODE K0906 LOT 35300

NET WT/PKG	NO. PKG	PACK. WGT	LOCATION	PO
2525	1	T- 13		
2665	1	T- 165		
	STUMP	Lumpy Stump		

TOTAL NET WT. 5190 PKG. N–CODE

PROD. SPVR. JV DATE 5-30-30 WHSE. OPER.

DUP050104223

25
247

CG 04 CODE KO-906-D PKG. ____

→ 35800

EST. WGT. 1377 LBS.

OK
HP

TOTAL WEIGHT 5077# (Req. ____)

PROCESSING INSTRUCTIONS: BATCH UNIT

PROCESSES	APPROVED BY
KO-906-D (C)	EWK 1/24/78
	DCG 1/26/78
TYPED BY	
rj 3/6/78	

MAKING NOTES

REMARKS

NAME: KROLOR® ORANGE R — NON-BLEEDING

INSTRUCTIONS — -PRESSING- — RECORD

						PRESSLOAD	1ST	2ND	3RD	4TH	5TH
VAT	247					STARTED	10AM				
DATE	5-20-80					CAKES USED	46				
TIME	6:10 PM					WATER ON	6:30				
RELEASED BY	C.M.I.					HRS. WASHED	4				
PRESS	2	22	23	24	25 / 38	OHMS	2000				
NO. OF CAKES	46	46	46	52		HRS. WASHED					
PRESS with AGITATION						OHMS					
WASH TO 2000 OHMS with 135-145°F water						HRS. WASHED					
TEST AFTER 3 HOURS						OHMS					
LOAD on 6 cars						CAKE CONDITION	7				
						NO. CARS LOADED					
						EXPLAIN LOSSES					

SAMPLES 8 oz Jar
DELIVER TO CTL for color

SAMPLED BY 499 RELEASED BY

-DRYING-

DRY 24 HOURS AT 180 °F

Dry on first stage only.
Reset every 5 hrs til dry.

LUMP: - OK - WET - SALTS - CONTAMINATED

ADDITIONAL DRYING HOURS REQUIRED

NO. DRUMS 16

SAMPLES
DELIVER TO

NO. CARS PULLED
SAMPLED BY

LUMP WGT. 5072
RELEASED BY

-GRINDING-

MILL 938 HSP 1/8" RP SCREEN 3500 RPM
MAX. TEMP. 170 °F

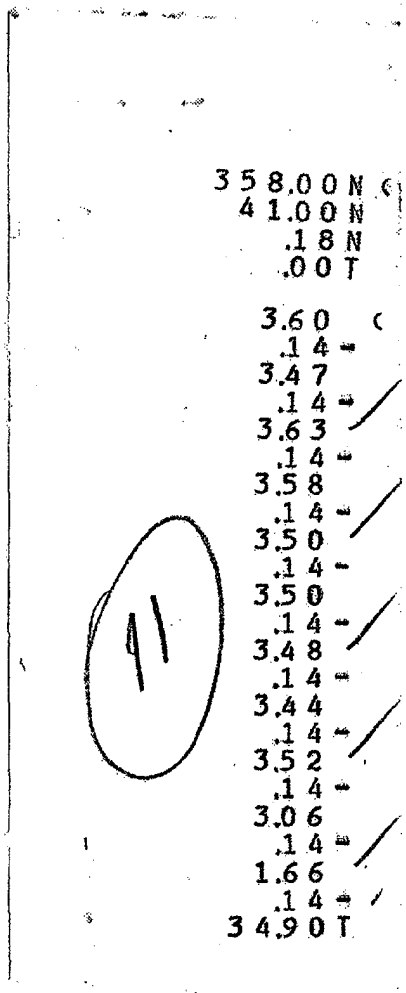
SCREEN RPM
MAX. TEMP. °F

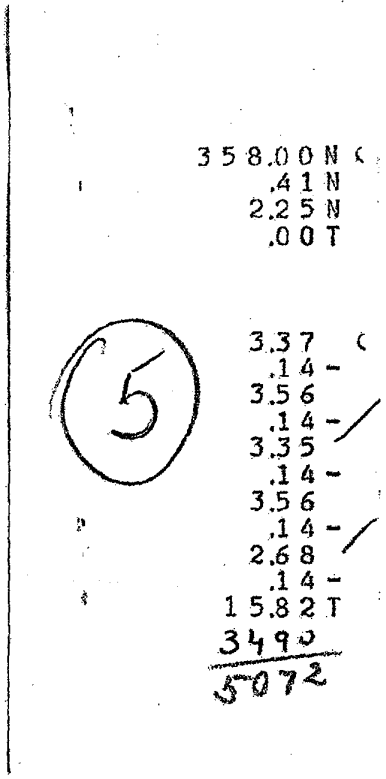
EXPLAIN LOSSES

SAMPLE / WITHOUT MIXING
SAMPLES 1 Env + 1 Pt can
DELIVER TO CTL

DATE MIXED
SAMPLED BY RELEASED BY

DUP050104224


358.00N
41.00N
.18N
.00T
3.60
.14
3.47
.14
3.63
.14
3.58
.14
3.50
.14
3.50
.14
3.48
.14
3.44
.14
3.52
.14
3.06
.14
1.66
.14
34.90T


358.00N
.41N
2.25N
.00T
3.37
.14-
3.56
.14-
3.35
.14-
3.56
.14-
2.68
.14-
15.82T
3490
5072