


INSTALLED in 1927... and



until it was returned for the first time to the factory shops for minor servicing in 1953. It required no maintenance other than periodical "air dusting".

Still going Strong!

While this may appear remarkable, it is not unusual. Brown Boveri Generator Voltage Regulators are installed and promptly forgotten... because they can operate for long intervals with no maintenance.

Its record in a Pennsylvania Power Plant is typical of the trouble-free service users get from

BROWN BOVERI GENERATOR VOLTAGE REGULATOR

GET

THE FACTS

about these remarkable voltage regulators for AC or DC service. Precision built. Completely self-contained, no auxiliary units. From 1 to the highest kVA outputs. FAST DELIVERY — 1 MONTH OR LESS. SEND FOR DATA, TODAY!

BROWN BOVERI CORP.

19 Rector St., New York 6, N. Y.



Peerless DEPENDABILITY

**STOPS
Pump Troubles
BEFORE THEY START—**



**PEERLESS TYPE A
SINGLE STAGE, SPLIT CASE
HORIZONTAL PUMPS**

General Characteristics

CAPACITIES: Up to 70,000 g.p.m.

HEADS: Up to 300 feet.


DRIVES: Direct-connected electric motor; belt-driven; diesel, natural gas, and gasoline engines; steam turbine; combination drives.

TEMPERATURES: Handles liquids up to 300°F.

DOUBLE & SINGLE SUCTION: (Double Suction Sizes 1½" through 48"; Single Suction Sizes 3" & 3½").

BOTTOM SUCTION: (Bottom Suction Sizes 12" through 42").

BALL BEARING: Radial and thrust bearings.

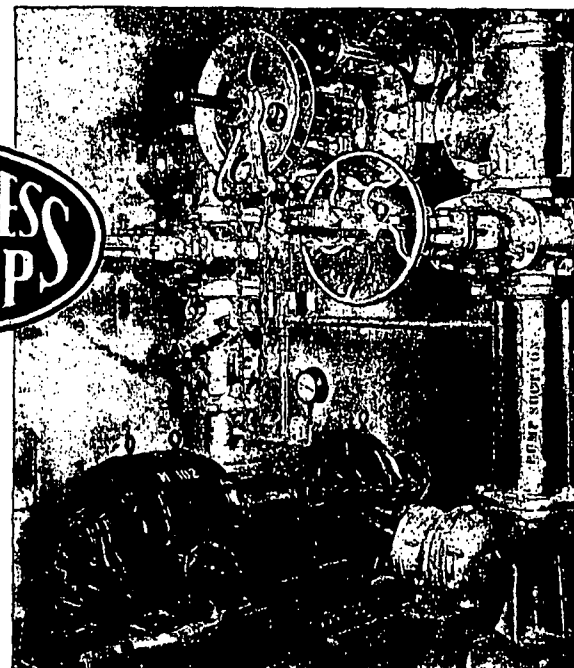

THE QUALITY PEERLESS BUILDS IN is returned to you in service

TYPE A for All purpose pumping

Peerless Type A pumps can be used in the widest variety of general pumping services, handling water and light alkaline fluids, where no solids are in suspension.

TYPE A for Advanced design—

Peerless Type A pumps are of the ball bearing type with horizontally split cases, for ease of inspection and maintenance. All are furnished with double suction impellers.

TYPE A for All capacities and heads—

Peerless Type A pumps offer users greatest range in capacities, delivering up to 70,000 g.p.m. Type A char-

acteristics permit pumping against heads up to 300 feet.

TYPE A for Ample safety factor—

Over-size shafts, heavy duty ball bearings, wear rings and shaft sleeves all contribute to ample protection against wear, afford a high factor of safety in operation and assure reliable service and extended pump life.

TYPE A for Augmented service life—

Type A pumps are fully tested in Peerless' modern hydraulic testing laboratory, which can duplicate the field conditions under which the pump will be used. Experienced Peerless trained engineers, located near you are at your

service to see that the Type A pump matches or exceeds your requirements.

TYPE A for Accuracy in construction—

Bearing seats are cast and bored integral with the case, assuring permanent alignment. Parts are machined to gage on an interchangeable part system.

..... MAIL COUPON FOR BULLETIN

PEERLESS PUMP DIVISION
FOOD MACHINERY AND CHEMICAL CORPORATION
301 West Avenue 26, Los Angeles 31, California
Please send a copy of Type A Bulletin No. B-1300.

NAME _____
COMPANY _____
ADDRESS _____
CITY _____ STATE _____

PEERLESS PUMP DIVISION

FOOD MACHINERY AND CHEMICAL CORPORATION

Factories: Los Angeles, Calif., and Indianapolis, Indiana.
Offices: New York; Atlanta; Chicago; St. Louis; Indianapolis;
Phoenix; Fresno; Los Angeles; Tulsa; Dallas; Plainfield;
and Lubbock, Texas; Albuquerque, New Mexico.
Distributors in Principal Cities; Consult your Telephone Directory.

