

BALDWIN-HILL
BH
INSULATIONS

No. 1

Effective
up to
1800° F.

INSULATING CEMENT

No. 1 in LOW HEAT LOSS
Its Rockwool base contains millions of dead-air cells which retain all their physical properties, contributing to low thermal conductivity.

No. 1 in COVERAGE
As much as 60 sq.ft. 1" thick per 100 lbs. when wet. Dry coverage is approximately 55 sq.ft.

No. 1 in LOW SHRINKAGE
Carefully selected binding agent combined with tightly rolled nodules of water repellent Rockwool cut shrinkage to the minimum.


No. 1 in ADHESIVENESS
Adheres immediately to brick or metal surface and forms a bond which strengthens upon drying.

No. 1 in ECONOMY
100% reclaimable up to 1200° F. No breakage or loss in storage. Saves time and labor in applying.

Send for Catalog giving complete data on entire line of Heat Insulation Products

BALDWIN-HILL CO.
575 KLAGG AVE. TRENTON, N. J.

AJAX
announces 2 new
TOUGH BABIES

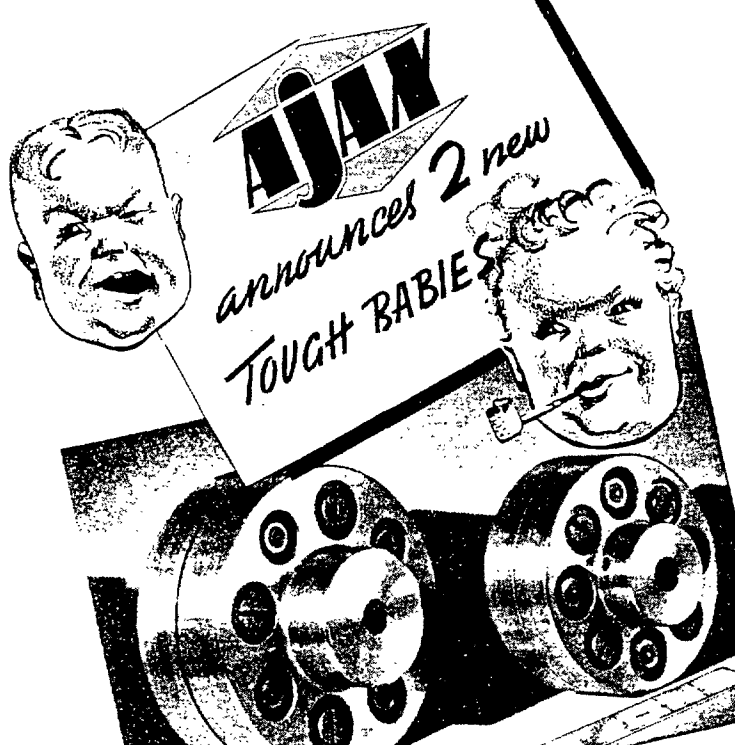

* Write for Data Book

Two new Ajax forged steel Flexible Couplings with 1½" and 1½" maximum bores meet the trend of using alloy steel shafts carrying a high percentage of their torque capacity. Rubber bushings and graphite-bronze bearings give resilient flexibility, positive drive, free end float, and eliminate backlash, noise and lubrication problems.


AJAX FLEXIBLE COUPLING CO.
Incorporated 1920
132 English St.
WESTFIELD, N. Y.

system to maintain desired water temperature. Unit is fixed-stem type requiring discharge from jacket or can be close to inlet. Bulb is installed locally in enlarged section of water line, as close to machine as possible with water flowing upward. Maximum working pressure is 150 lb. Readings are calibrated at factory at any temperature and can be adjusted by 25 deg above or below factory calibration.

Sarco Co, Inc, 183 Madison Ave, New York, N. Y.

Sledge-Type Socket Wrenches

LINE of wrenches available for handling large nut-turning jobs in power plants, etc., where big nuts must be downed. Anvil end of wrench takes sledge-hammer

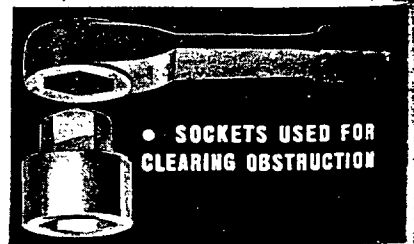

blows as bolts are tightened. Companion sockets are used where obstructions must be cleared or to reach buried bolt-heads or nuts. Available in sizes from 1½ in. to 4½ in.

Snap-On Tools Corp, Kenosha, Wis.



Vgit Blower

AUTOVENT blower, instead of being direct connected, is belt-driven, and maker claims many advantages. Some of these include: versatility in regard to motor size, greater portability, and wider adjustability. Unit consists of uniblade Type H blower operated by a standard-frame motor equipped with suitable V-belt drive. Motor is mounted on steel pedestal base built integral with blower housing.

Autovent Fan & Blower Co, 1805 Kosner Ave, Chicago, Ill.



SE CEMENT

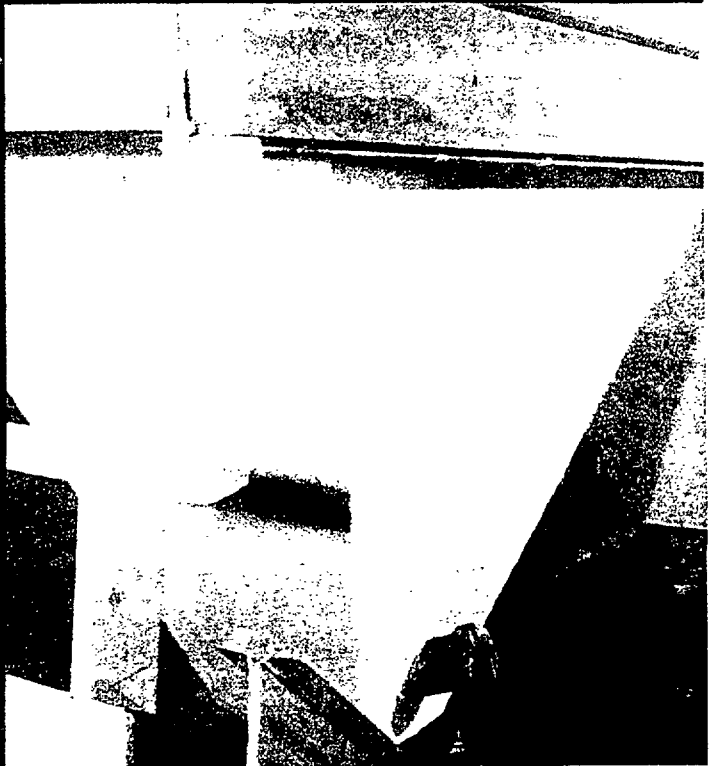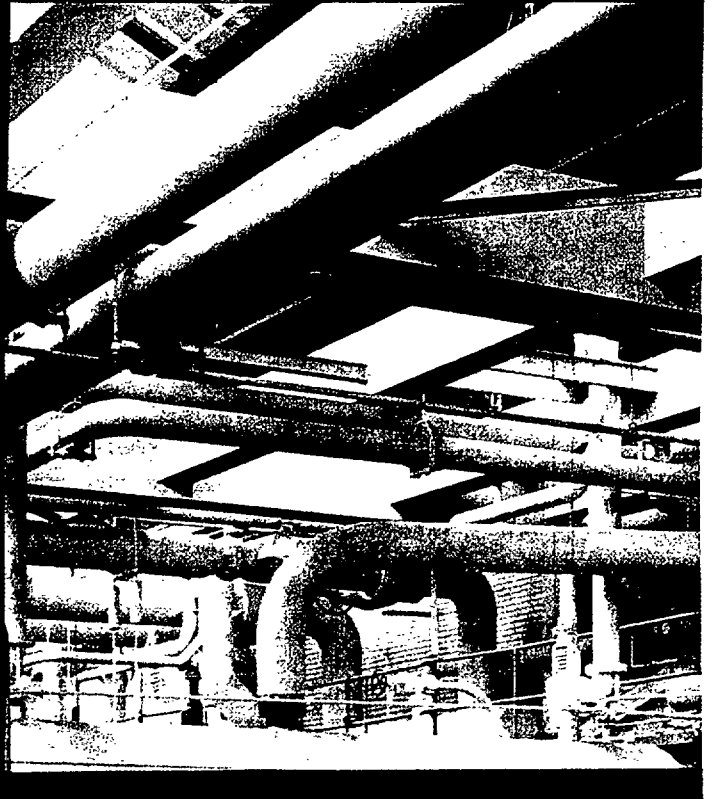



SUPER POWERHOUSE

Insulating/Finishing

CEMENT

DATA

APPLICATION

Water/Cement Ratio 1.1
For general use, 6 1/2 gal.
per 50 lb. cement.

Dried Cement Properties

Density	34 lb/cu ft.
Coverage	72 sq. ft. 1/2" thick per 100 lbs.

Thicknesses Recommended


Finishing	1/2" coat
Insulating	Same as adjacent insulation.

Drying Shrinkage Negligible

COMPLIANCE WITH SPECIFICATIONS

MILITARY: MIL-C-2908A
FEDERAL: SS-C-160 Type III Grade F
ASTM: C449-64

THERMAL CONDUCTIVITY

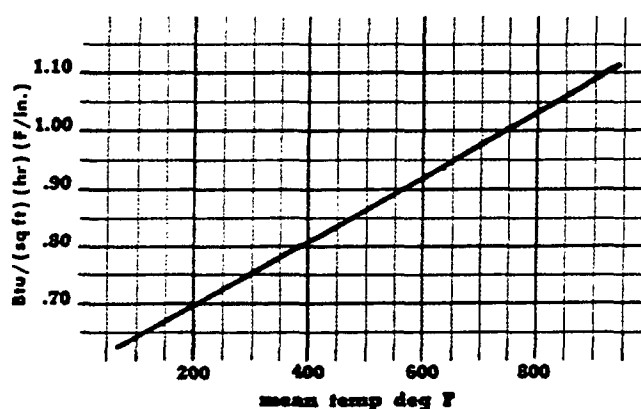

PACKAGING

Packed in 50 lb.
multi-wall paper bags