


United States Register Company


General Offices: Battle Creek, Mich., U.S.A.

Branches: MINNEAPOLIS, MINN., KANSAS CITY, MO., ALBANY, N. Y.

Air Conditioning Registers, Vents and Grilles

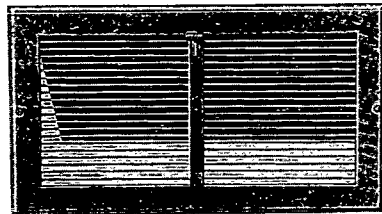

No. 249—Multiple-Valve Air Conditioning Register. Gives complete Air Control. Vertical Front Bars—Key-pin adjusted to provide 45 deg Right and Left or Two-way Side Flow. Lever operated Horizontal Backvalves give from Full Closed to any degree of Upflow and to 45 deg Downflow. FULL FACE COVERAGE. Can be supplied with any style of Setting Frame. Fits all Stack Heads of Standard Size Dimensions.

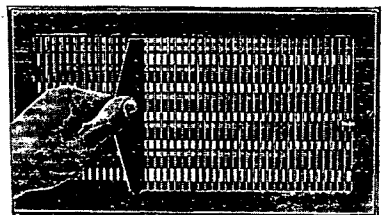


All of above Styles can be supplied with either Lever or Individually adjusted Multiple Valves or Louvers. i.e. 177VVI—Vertical Valves Individually adjusted. 145VVI—Lever operated Vertical Valves.

Grilles and Vents in Matching designs are available.


For Complete Information Write for Catalog No. 53.

Complete Gravity and Air Conditioning Register, as well as Fitting Catalogs furnished on request.

No. 153—Single-Valve Air Conditioning Register—Bars $\frac{1}{4}$ in. deep—Spaced 4 openings to the inch affords Non-Vision. Can be supplied in Directional Flow in either Horizontal or Vertical Bar Styles. Can be furnished with all styles of Setting Frames.

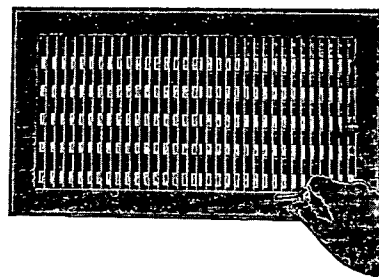


No. 256—Multiple-Valve Flex-bar-Air Conditioning Register. Vertical Front Bars set 22 deg Right and Left. Side Flow Deflection attained by setting of Grille Bars with bending wrench to accommodate room condition. Backvalves give same Up and Down control of air flow as No. 249 above. FULL FACE COVERAGE. Can be supplied with any style of Setting Frame. Fits all Stack Heads of Standard Size Dimensions.

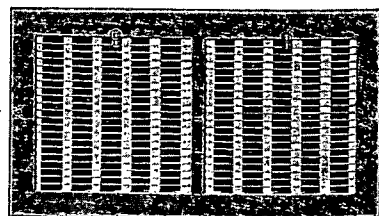


No. 153-VVL Horizontal Bar Non-Vision Design-Vertical lever operated rear valves.

No. 500 U.S. Ceiling Outlet

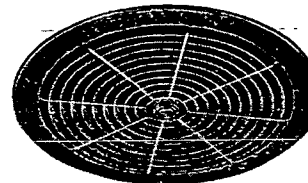


No. 500 U. S. Round Ceiling Outlet. Made in 6 in., 8 in., 10 in., 12 in. and 14 in. sizes. Furnished with or without No. 900 frames. However, frames are recommended. No. 500 outlets will be furnished with Dampers when required.

No. 410 U. S. Perimeter Floor Register.

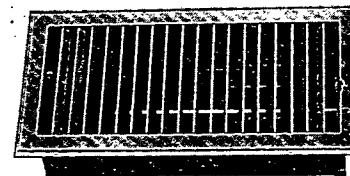

No. 191 U. S. Multi-Flex Register Streamlined Double-Edged Grille bars. Front bank of bars—Horizontal Adjustable. Second bank of bars—Vertical Adjustable. Rear Valves—Horizontal Lever operated. May be furnished Key operated, or with Removable Lever.

No. 191 U. S. Multi-Flex Register

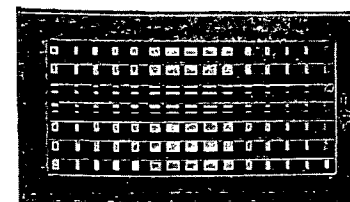

No. 192 U. S. Multi-Flex Register—same as No. 190—but with Vertical Front Bars.

No. 193 U. S. Multi-Flex Grille—same as No. 190—but less Rear Valves.

No. 194 U. S. Multi-Flex Grille—same as No. 191—but less Rear Valves.


No. 195 U. S. Multi-Flex Grille—same as No. 193—but Vertical Bars only.

No. 196 U. S. Multi-Flex Grille—same as No. 194—but Horizontal Bars only.

See our Catalog No. 53 for the additional Non-Flex Register and Grille Line.


No. 163 $\frac{3}{4}$ U. S. (Out-of-Wall) Air Conditioning Register is made in 10 x 6, 12 x 6, 14 x 6 in. sizes—with heads (No. 163 $\frac{3}{4}$)—without heads (0163 $\frac{3}{4}$). Intakes to match No. 173 $\frac{3}{4}$, made in 5 sizes 10-12-14-24 & 30 x 6 in. "Dodge" old house troubles. Avoids cutting sills, joists, walls, carpets, rugs and floor.

No. 163 $\frac{3}{4}$ U. S. Out-of-Wall Air Conditioning Register

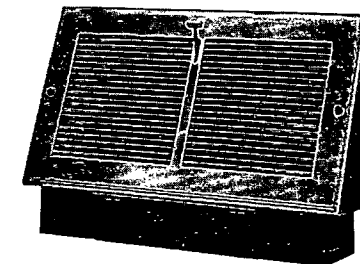

Valves of No. 410 run the long way to give "Away-from-the-Wall" Deflection.

No. 190 U.S. Multi-Flex Register

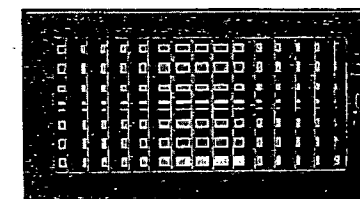

No. 190 U. S. Multi-Flex Register Stream-lined, Double-edged Grille bars. Front bank of bars—Vertical, Adjustable. Second bank of bars—Horizontal, Adjustable. Rear Valves, Horizontal Lever operated. May be furnished key operated, or with Removable Lever.