



PLANNET SERVICE
USG-995


PERFATONE

the last word in Sound Control

Imagine being able to remove any 12" x 24" area in your ceiling to reach wiring, plumbing, air conditioning ducts—then replace it without repainting or maintenance cost! This money-saving feature is yours with PERFATONE acoustical construction. *Exceptionally high sound absorption efficiency* fits PERFATONE for noise reduction in offices and restaurants, and for *reduction of reverberation time* to improve reception of speech and music in auditoriums, theaters and radio studios.

APPLICATION

The 12" x 24" units have center grooves which create the appearance of 12" x 12" units when applied. Installed by expert United States Gypsum Company approved applicators, PERFATONE units are clipped into place by special tee runners. The tee runners may be attached to carrier channels in suspended ceiling construction or attached to plastered ceilings by means of special knock-out channels.

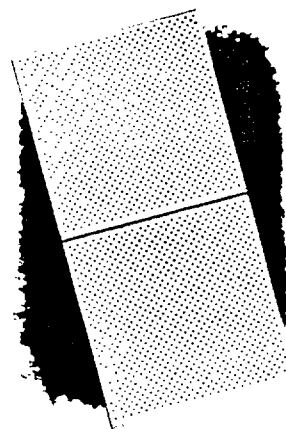

PERFATONE

consists of perforated metal units, 12" x 24", backed by mineral wool sound absorbent pads. This gives you the unusually high Noise Reduction Coefficient of .85, combined with fire resistance, durability, sanitation and ease of removal.

INCOMBUSTIBLE PAD

Mineral wool pad, enclosed completely in a flameproof membrane, is supported within the metal units on crimped, galvanized wire mesh.

WASHABLE

The smooth, baked enamel metal surface of PERFATONE may be washed repeatedly without affecting sound absorption efficiency—ideal for locations where dirt and grease are deposited on the surface.

PAINTABLE

If redecoration is desired, PERFATONE may be repainted without reducing the noise reduction coefficient.

INCOMBUSTIBLE

The metal units and the mineral wool pads are entirely incombustible. Pad wrapping is all flameproofed.

PERFATONE


**THE LAST WORD IN TOP
SOUND CONTROL AND LOW UPKEEP**

Economical maintenance

Baked enamel surface is washed easily and quickly to remove dirt or grease. Washing does not affect PERFATONE absorption efficiency.

Removable


Individual PERFATONE units can be removed quickly and easily to install or repair wiring, pipes, etc. Units are replaced speedily and simply, snapping into place firmly on special tee runners.

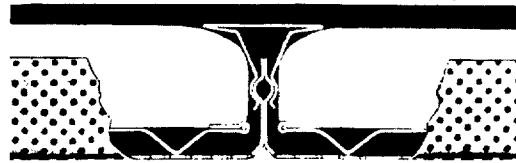

High sound absorption

Cross section of PERFATONE units at a joint, showing pad and pad support. Noise passes through the metal unit and is effectively smothered in the mineral wool pad.

* T. M. REG. U. S. PAT. OFF.

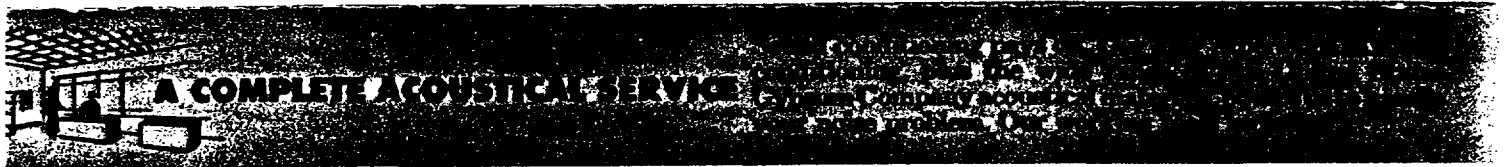

AUDITONE*—high sound reduction at low cost, combined in a handsome, slotted wood fiber tile.

ACOUSTONE* mineral acoustical tile—combines high sound absorption and fire resistance with a beautiful fissured texture that resembles Travertine marble. No two tiles are identical—pattern is as natural as the grain of wood!

MOTIF'D* ACOUSTONE—same composition as ACOUSTONE; designs "etched" into surface to produce striking resemblance to fine damask.

*T. M. Reg. U. S. Pat. Off.



ASK FOR FREE ANALYSIS


of your own noise problems. We shall be glad to make an analysis with recommendations for correction at no obligation to you.



United States Gypsum

For Building • For Industry

Gypsum • Lime • Steel • Insulation • Roofing • Paint



**The
Last
Word** ▼

BB022 1301