


Rugged Duty Wet & Dry Vacs.

Low cost, high quality machines for total industrial and commercial maintenance. These vacs pick up non-combustible material such as dirt and debris, nails, chips, liquids and mixtures. Industrial 1.5 HP (peak) two-stage by-pass motor for powerful suction. Unique cylinder float automatically shuts off suction when liquid capacity is reached, eliminating any risk of overflow. Steel tanks have high visibility safety color and are resistant to epoxy/phenolic coating for long life. 10 gallon model readily adaptable to the Standard Asbestos Filter Kit, Model 800-2.

Standard equipment includes 12' crushproof hose, double lift handle, the following metal accessories: chrome extension wand, 14" square squeegee, 14" square shoe.

Model 462-30 comes with a cross brace dolly, a heavy duty cast iron standard equipment on Models 462-15 and 832-11.

The heavy duty cast iron provides easy mobility that, with the optional hand truck, makes climbing or descending stairs easy. Quick release buttons on the handle allow easy emptying, handle.

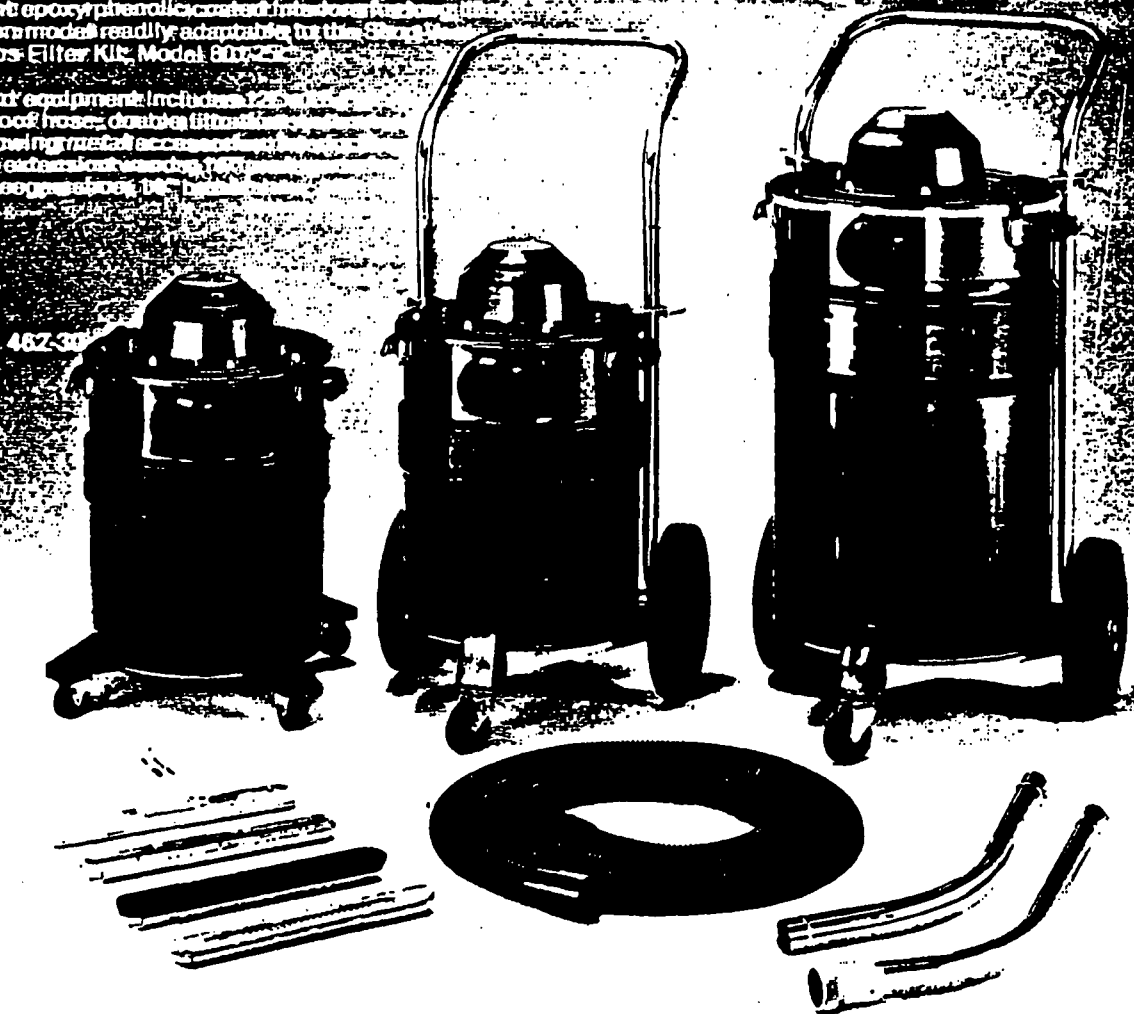

8004 1913

PQ

TYPICAL CHARACTERISTICS

Model	Tank Size	Wet Capacity	Dry Capacity	S.P. (Inches of Water)	H.P. (Peak)	C.F.M. (2 1/2" Orifice)	Electrical Rating	Cord Length	Filter Type	Unit Dimensions	Shp. Wt.	Package Dimensions
462-30	10 gal.	7 1/2 gal.	10 gal.	80	1.7	102	120V 60Hz 6.5 Amps	18'	Foam and Full Cloth	15" x 15 1/2" x 22 1/2"	34 lbs	16" x 16" x 28 1/2"
462-15	10 gal.	7 1/2 gal.	10 gal.	80	1.7	102	120V 60Hz 6.5 Amps	18'	Foam and Full Cloth	15" x 15 1/2" x 22 1/2"	52 lbs	18 1/2" x 18 1/2" x 30 1/2"
832-11	20 gal.	16 1/2 gal.	20 gal.	80	1.7	102	120V 60Hz 6.5 Amps	18'	Foam and Full Cloth	16" x 17" x 30"	57 lbs	18 1/2" x 18 1/2" x 30 1/2"