


United States Register Company


General Offices: Battle Creek, Mich., U.S.A.

Branches: MINNEAPOLIS, MINN., KANSAS CITY, MO., ALBANY, N. Y.

Air Conditioning Registers, Vents and Grilles

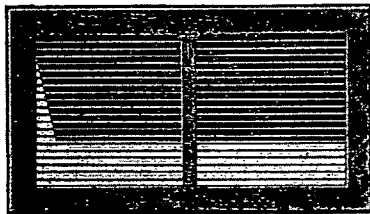

No. 249—Multiple-Valve Air Conditioning Register. Gives complete Air Control. Vertical Front Bars—Key-pin adjusted to provide 45 deg Right and Left or Two-way Side Flow. Lever operated Horizontal Back Valves Give from Full Closed to any degree of Upflow and to 45 deg Downflow. **FULL FACE COVERAGE.** Can be supplied with any style of Setting Frame. Fits all Stack Heads of Standard Size Dimensions.

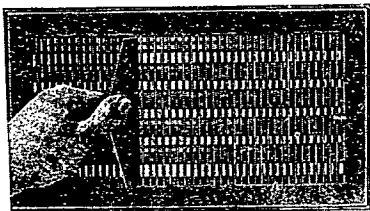


All of above Styles can be supplied with either Lever or Individually adjusted Multiple Valves or Louvers. *i.e.* 177VVI—Vertical Valves Individually adjusted. 145VVL—Lever operated Vertical Valves. Specially adapted to Combination Heating and Cooling Systems.

Grilles and Vents in Matching designs are available.


For Complete Information Write for Catalog No. 556-R.

Multiple Valve A. C. Registers available with Key Operation.

No. 153—Single-Valve Air Conditioning Register—Bars $\frac{1}{4}$ in. deep—Spaced 4 openings to the inch affords Non-Vision. Can be supplied in Directional Flow in either Horizontal or Vertical Bar Styles. Can be furnished with all styles of Setting Frames.

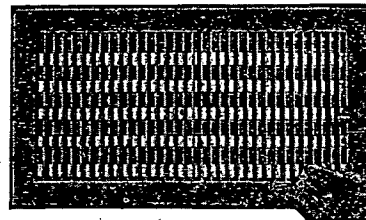


No. 256—Multiple-Valve Flex-bar Air Conditioning Register. Vertical Front Bars set 22 deg Right and Left. Side Flow Deflection attained by setting of Grille Bars with bending wrench to accommodate room condition. Back-valves give same Up and Down control of air flow as No. 249 above. **FULL FACE COVERAGE.** Can be supplied with any style of Setting Frame. Fits all Stack Heads of Standard Size Dimensions.

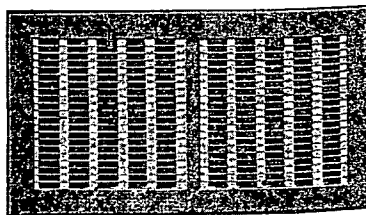


No. 153-VVL Horizontal Bar Non-Vision Design Vertical lever operated rear valves. No. 145-VVL—Specially adapted to Combination Heating and Cooling Systems. Horizontal Bar Adjustment to 60 deg Up and Down Flow.

No. 500 U.S. Round Ceiling Diffuser Step-Down Style

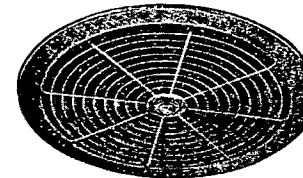


No. 500 U. S. Round Ceiling Diffuser. Made in 6 in., 8 in., 10 in., 12 in. and 14 in. sizes. Furnished with or without No. 900 frames. However, frames are recommended. No. 500 diffusers will be furnished with Dampers when required.

No. 410 U. S. Perimeter Floor Register.



No. 191 U. S. Multi-Flex Register Streamlined Double-Edged Grille bars. Front bank of bars—Horizontal Adjustable. Second bank of bars—Vertical Adjustable. Opposed Rear Valves—Screw Driver operated.

No. 191 U. S. Multi-Flex Register

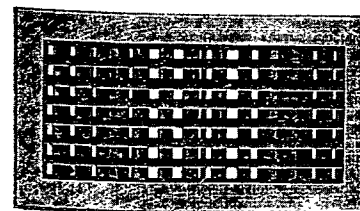

No. 192 U. S. Multi-Flex Register—same as No. 190—but with Vertical Front Bars.

No. 193 U. S. Multi-Flex Grille—same as No. 190—but less Rear Valves.

No. 194 U. S. Multi-Flex Grille—same as No. 191—but less Rear Valves.


No. 195 U. S. Multi-Flex Grille—same as No. 193—but Vertical Bars only.

No. 196 U. S. Multi-Flex Grille—same as No. 194—but Horizontal Bars only.

See our Catalog No. 556-R for the additional Non-Flex Register and Grille Line.


No. 1000 U.S. Super Base Diffuser is equipped with Balancing Set-Lock and Adjustable Slide-Plate bottom opening. Furnished in 2 ft and 4 ft sections with which any continuous lengths may be assembled.

No. 1000 U.S. Super Base Diffuser

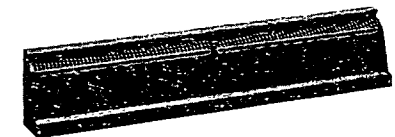


No. 105 U.S. Diffuser Sidewall Register furnishes a complete 180 deg Sunburst Diffusion at an even fpm at every degree of air diffusion.

No. 105 Diffuser Sidewall

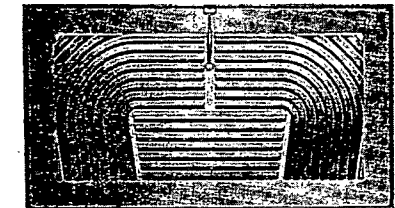

No. 190 U.S. Multi-Flex Register

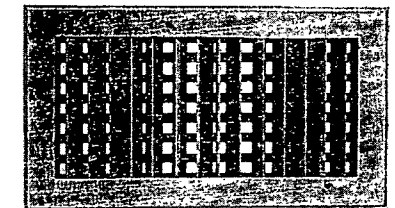

No. 190 U. S. Multi-Flex Register Streamlined, Double-edged Grille bars. Front bank of bars—Vertical, Adjustable. Second bank of bars—Horizontal, Adjustable. Opposed Rear Valves—Screw Driver operated.