PLAINTIFF'S EXHIBIT KM-57

TRI-CITY PRINTING, INC. 777 Burlway Road • Burlingame, California 94010 • Phone (415) 342-0888

PROPOSAL FOR: Kelly Moore Paint Company DATE: 4/23/71

DESCRIPTION: Georgia Pacific Labels (2)

QUANTITY: 2,000/5,000

TRIM SIZE: 7"x9" and 8¼"x12"

PAPER: Body: C1S Label, white

Cover:

ARTWORK: None

COMPOSITION: 1 col/1 side

PRESSWORK: Body:

Cover:

BINDING: Trimmed

PACKAGING: Bulk

SHIPPING: FOB San Carlos

PRICE:

Ready Mix Joint Compound - 62 lbs.	2,000 - $134.00/5,000 -	$179.00
one gallon	2,000 - 124.00/5,000 -	$171.00

The above prices are subject to acceptance within _____ days. All proposals subject to conditions printed on reverse side.

TERMS: 2/10 net 30
Alterations to be charged as an extra

_____

TRI-CITY PRINTING, INC.
777 Burlway Road • Burlingame, Ca[illegible]

TRI-CIT PRINTING, INC. 777 Burlway Road • Burlingame, California 94010 • Phone (415) 342-0888

PROPOSAL FOR: Kelly Moore Paint Company

DATE: 3/23/71

DESCRIPTION	PACO Labels
QUANTITY	2,000/5,000
TRIM SIZE	7 1/8" x 20½"
PAPER: Body	C1S Label, white
Cover	
ARTWORK	None
COMPOSITION	None
PRESSWORK Body	Two colors/one side
Cover	
BINDING	Trimmed to size/1 gal label drilled - two holes
PACKAGING	Bulk
SHIPPING	FOB San Carlos

KMBB 6594

PRICE

2,000 - $227.00	5,000 - $272.00	5 gallon label
2,000 - 242.00	5,000 - 299.00	1 gallon label

The above prices are subject to acceptance within _____ days. All proposals subject to conditions printed on reverse side.

TERMS: 2/10 - net 30
Alterations to be charged as an extra.

_____

TRI-CIT PRINTING, INC.
777 Burlway Road • Burlingame, California 94010

RM-6437

GEORGIA-PACIFIC

READY MIX JOINT COMPOUND

ONE GALLON

U. S. STANDARD MEASURE

BESTWALL JOINT SYSTEMS

FOR USE IN EMBEDDING JOINT REINFORCING TAPE, FINISHING AND CONCEALING JOINTS, NAIL HEADS AND CORNERBEAD IN GYPSUM WALLBOARD CONSTRUCTION.

RECOMMENDATIONS FOR USE

1. Protect from freezing. Store in a warm place for at least 24 hours before using. If compound does freeze, allow to thaw in a warm place. Do not force thaw.
2. If any liquid has separated from compound, remix before using.
3. If necessary, the consistency may be adjusted by adding small amount of clean water. Avoid excessive thinning.
4. Allow compound to dry thoroughly between applications. Overnight drying is usually sufficient. When applying during cold weather provide heat to maintain 55° F. minimum temperature until occupied.
5. Do not mix any other Ready Mixed or dry Powder Joint Compound to the contents of this can.

KEEP FROM FREEZING — NON-FLAMMABLE — KEEP OUT OF REACH OF CHILDREN

GEORGIA-PACIFIC SYPSUM CORP.

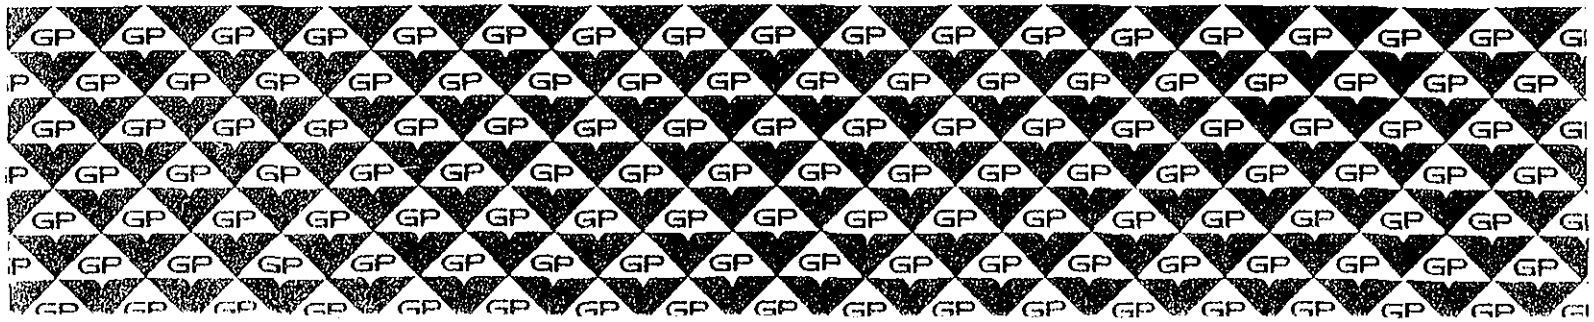

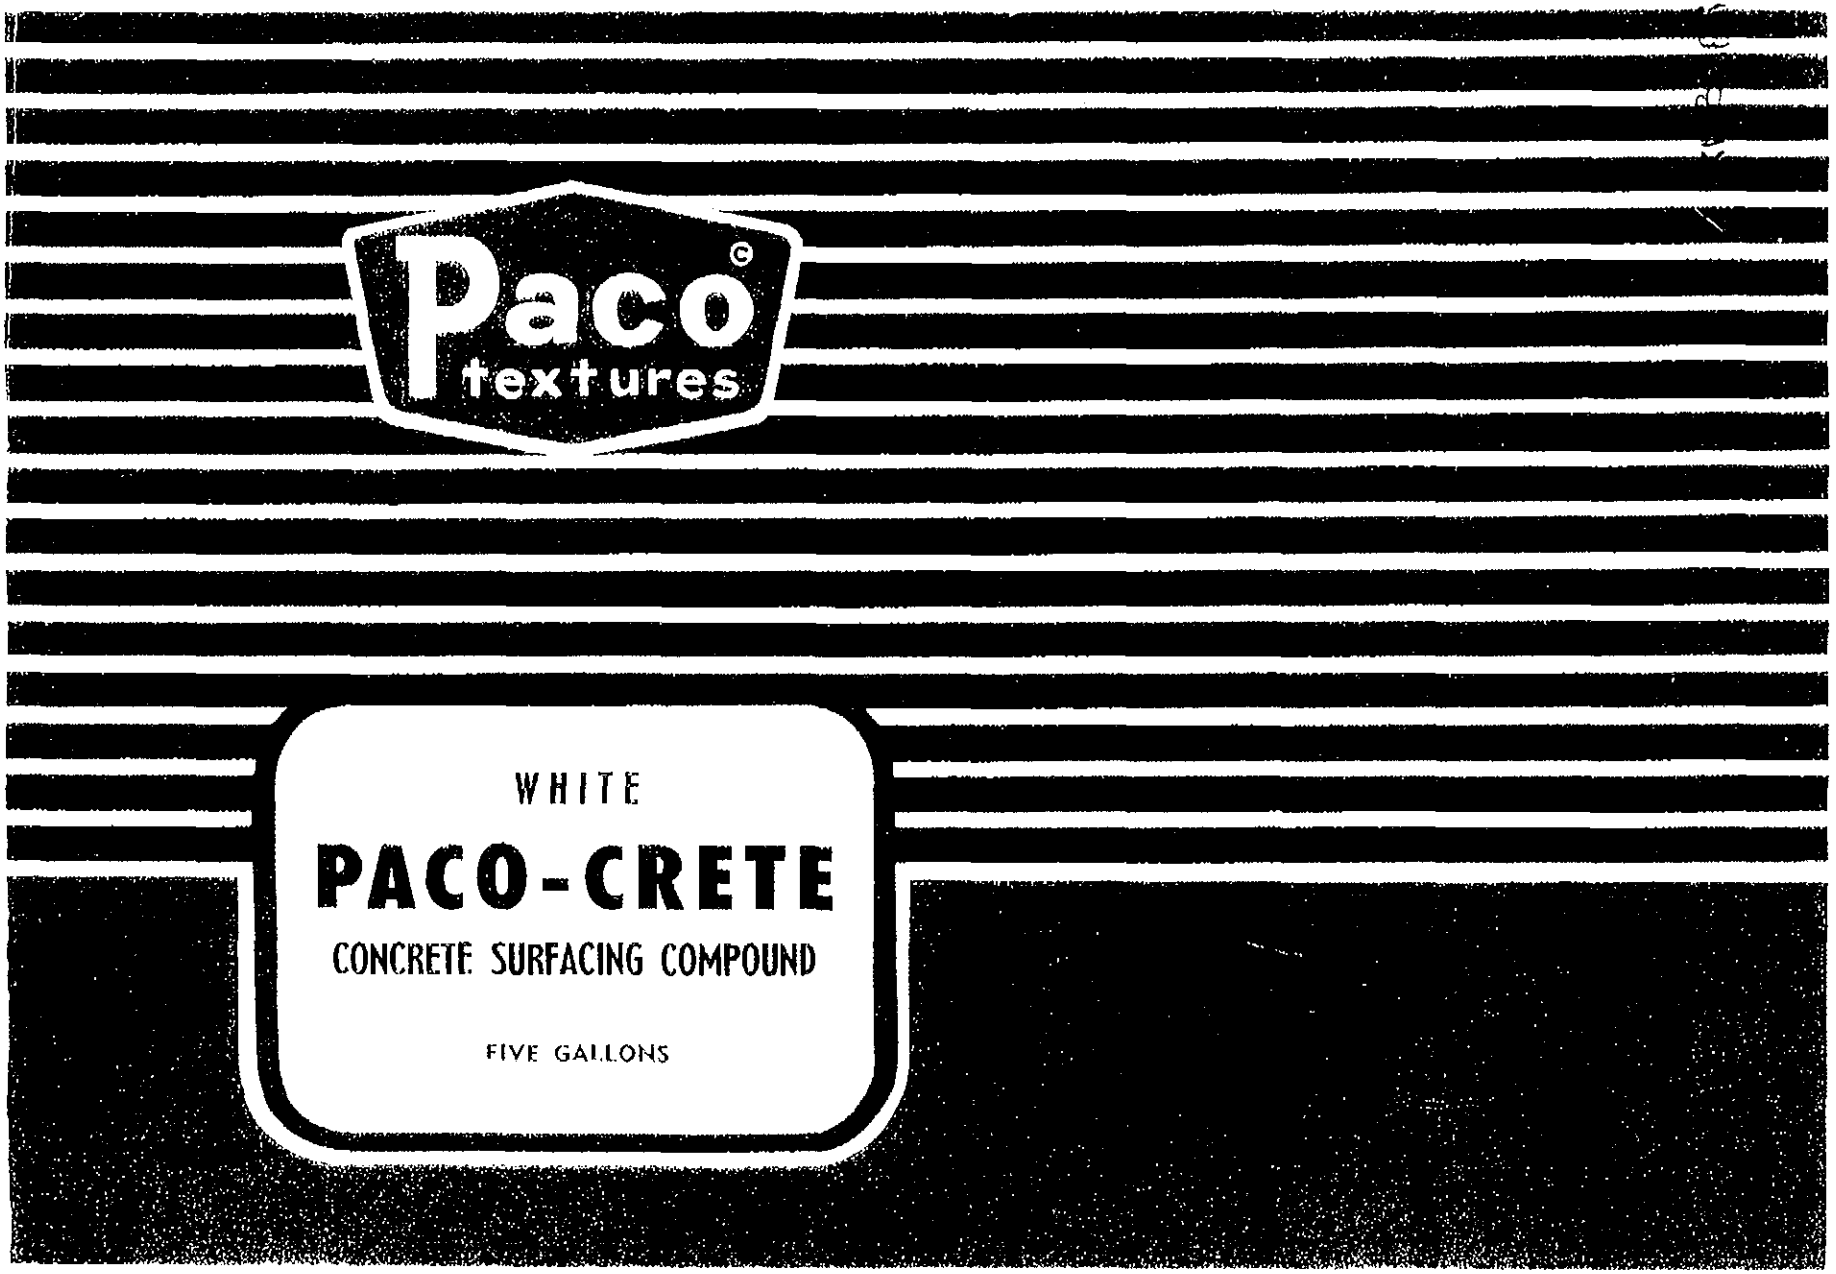
Paco©
textures
WHITE
PACO-CRETE
CONCRETE SURFACING COMPOUND
FIVE GALLONS

PACO-CRETE

2AA + 5AA

RECOMMENDATIONS FOR USE

PACO-CRETE CONCRETE SURFACING COMPOUND is designed to give interior concrete construction a smooth, level finish. This material should be used as a base coat for PACO-TEX WALL TEXTURE, DECO-TEX ACOUSTIC CEILING SPRAY, or KELLY-MOORE TOP QUALITY LATEX PAINT.

DIRECTIONS FOR USE

PREPARATION: *Remove all loose particles and grind protruding irregularities* to surface level. Fill all voids deeper than 1/4 inch with concrete. **CAUTION:** Remix before using. Thinning is not advisable and should only be done with clean, cold water. Not for exterior surfaces.

APPLICATION

PACO-CRETE can be used with hand or machine tools. The number of coats required are determined by the condition of the concrete surface and desired finish. For satisfactory results, this material must have good drying conditions for a minimum of 24 hours between coats.

Paco Textures Corporation

San Carlos, Calif.,

