


Position of PFAS in product

■ Example 55.13039.102

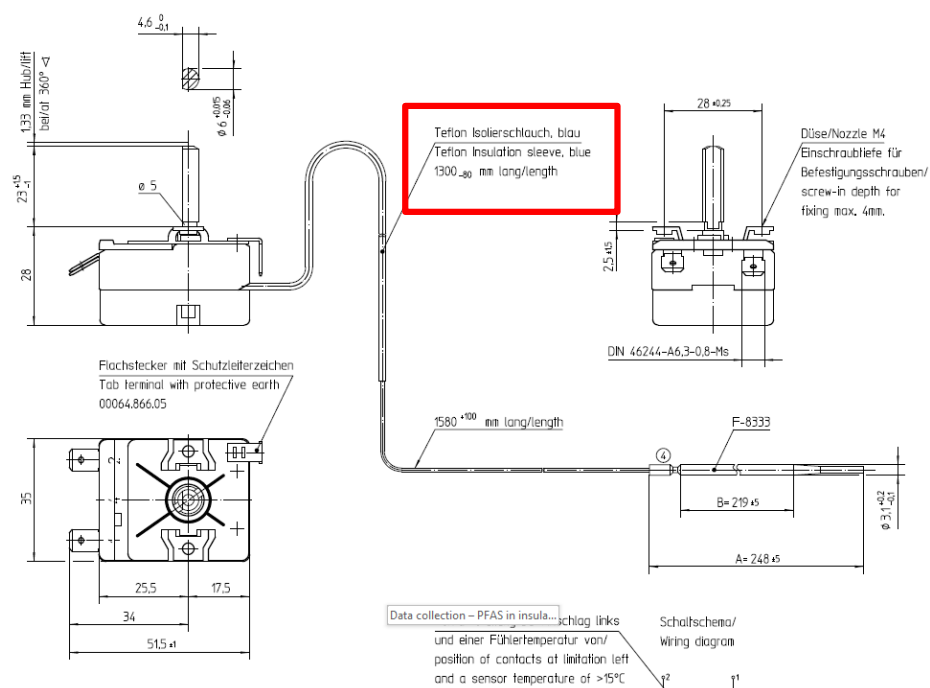

Position of PFAS in product

- Where is PFAS substance used? (drawing, exploded view)

The insulation sleeve with PFAS is used for temperature environments > 230°C

Isolierschlauch	
Art	Temperaturbeständigkeit
Teflon-Isolierschlauch	260°C
PVC-Isolierschlauch	105°C
OWF-Isolierschlauch	140°C
Glasseide -Isolierschlauch (polyurethanlackbeschichtet)	175°C
Glasseide -Isolierschlauch (Silikon getränkt)	230°C