




Burnham Corporation

BOILERS and RADIATORS


Irvington-on-Hudson, N. Y.

There's a Burnham for Every Purpose—Write for Descriptive Catalogs


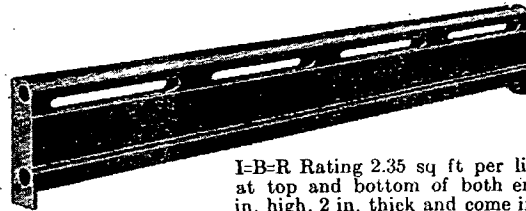


**BURNHAM
BASE-RAY
RADIANT
BASEBOARD
(Cast-Iron)**

I-B-R Rating 2.35 sq ft per lineal foot. Tappings $\frac{3}{4}$ in. at top and bottom of both end sections. Sections are 7 in. high, 2 in. thick and come in 12, 18 and 24 in. lengths. Cast-iron fins on back are an integral part of each section.

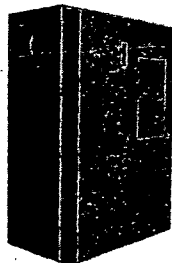


PB Series Gas Boiler—Power burner; 295 to 610 sq ft for Steam and 375 to 1100 sq ft for Water. A.G.A. and I-B-R approved. Available with year 'round domestic hot water.

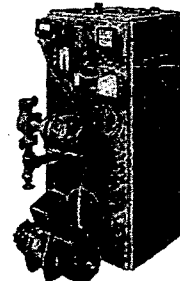

PACE-PAK Boiler—I-B-R Net 530 sq ft for Water. Design same as PACE-MAKER. Delivered in one crate ready for installation with all controls and wiring factory installed for assured performance.

PACEMAKER Boiler for oil firing. I-B-R Ratings 270 to 710 sq ft for Steam and 490 to 1270 for Water. A cast-iron vertical flue boiler. Can be equipped with tankless or storage type domestic hot water coils.



Radiant



YELLOW-JACKET Boiler (shown with extended Jacket). All fuel, convertible. I-B-R Ratings 305 to 935 sq ft for Steam and 490 to 1600 sq ft for Water.



Slenderized

BURNHAM RADIANT RADIATORS—Two heights 20 and 23 in. Ratings 2.25 sq ft per section and 3.40 sq ft per section respectively.

BURNHAM SLENDERIZED RADIATORS—Three to six tubes in four heights 19 in. to 32 in. Ratings are from 1.6 sq ft per section to 3.7 sq ft per section.



Burnham Corporation

BOILERS and RADIATORS



Irvington-on-Hudson, N. Y.

There's a Burnham for Every Purpose—Write for Descriptive Catalogs



PACE-KING BOILER


A new Burnham Series, exclusively oil fired, for apartment houses, schools, hospitals, commercial installations, etc. Its vertical flue design is engineered similar to PACEMAKER and PACE-PAK... low internal draft loss... lower stack temperatures... lower chimney design... no baffles used. Provided with tankless hot water heaters with capacities from 6 to 10 gpm. Available in 14 models with I-B-R ratings from 1100 to 4500 for Steam and 1925 to 7200 for Water. Built for safety and dependability according to the ASME Construction Code and the I-B-R Rating and Testing Code.

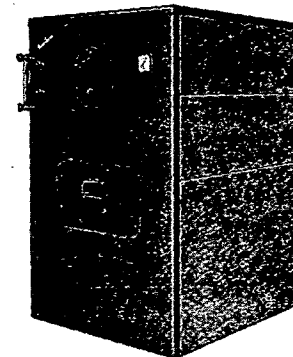

PACE-KING SECTIONS are designed with hundreds of efficient fins for fast heat exchange and fuel economy. Can easily be passed through existing doorways. Sections are reversible... this feature also allows wider choice of location since outlet connections and clean out panels can be placed on either side. Boiler can be fired from front or rear. Long water legs provide plenty of room for combustion.



No. 1, 2, 3 and 36 in. Series and 50 in. Twin Series—Famous Burnham 3-times-back-and-forth fire travel; for all fuels. 230 to 14,600 sq ft for Steam; 370 to 23,360 sq ft for Water.

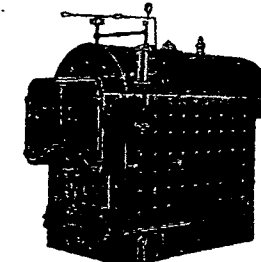

Welded Steel Boiler—Compact type—Capacities from 2500 to 35,000 sq ft for Steam and 4800 to 56,000 sq ft for Water. Furnished for coal, oil or stoker firing. SBI Rated.