

I. H. WEAVER ■
CORPORATE DIRECTOR
ENVIRONMENTAL CONTROL

123 E. STIEGEL STREET, MANHEIM, PENN. 17545

Raybestos-Manhattan

July 17, 1975

Mr. E. W. Drislane
Executive Director
Friction Materials Standards Institute, Inc.
Bergen Mall Office Center
E. 210, Route #4
Paramus, N. J. 07652

Dear Ed:

Please note the attached article that appeared in the May/June issue of Public Health Reports. The second page of the article contains a reprint of a booklet titled "Brake Repair Work Can Be Hazardous to Your Health."

This report, and others which have appeared recently, emphasize the need for responsible action on the part of friction materials manufacturers. Early this year, bulletins were sent to Grey-Rock and Raybestos distributors describing proper brake service procedures. However, I doubt very much that this information has gotten down to the mechanic level.

It has been suggested a small card containing abbreviated instructions be placed in every box containing automotive, bus, truck, and industrial brake linings manufactured by Raybestos-Manhattan. Tags probably would be used for roll lining. The following text is recommended:

IMPORTANT

- AVOID EXPOSURE TO ASBESTOS DUST.
- DO NOT USE AIR HOSE WHEN PERFORMING BRAKE SERVICE WORK OR FOR CLEANING WORK AREA.
- USE VACUUM CLEANING OR WET CLEANING METHODS SUCH AS DAMP CLOTH OR OIL TREATED BRUSHES.
- DO NOT GRIND OR OTHERWISE MACHINE BRAKE LINING MATERIAL WITHOUT ADEQUATE DUST EXHAUST AND COLLECTION EQUIPMENT.

I strongly recommend all FMSI member companies adopt similar policy and procedure.

Very truly yours,

IKE
I. H. Weaver
Corporate Director
Environmental Control

dm

F-210
(6)

FMSI--0208

FMSI 03293

The Hazards of Asbestos for Brake Mechanics

BARRY CASTLEMAN, LUCILLE A. CAMAROTA, ALBERT J. FRITSCH,
SUSAN MAZZOCCHI, and ROBERT G. CRAWLEY

ASBESTOS is the generic name of a group of hydrated magnesium silicate mineral fibers. There are two groups of these minerals—serpentine (chrysotile) and amphibole (amosite, crocidolite, anthophyllite, tremolite, and actinolite). Ninety-five percent of the world's asbestos production is chrysotile.

Reports of epidemiologic and pathological studies (1-4) reveal that occupational exposure to commercial asbestos minerals enhances the likelihood of a number of diseases—asbestosis and cancers of the lung, pleura, peritoneum, larynx, and gastrointestinal tract. The time from onset of exposure to the time of clinically apparent disease is usually more than 20 years. Cancer from asbestos is not limited to workers who handle the material. There are also reports of pleural and peritoneal mesothelioma (tumors rarely seen in the general population) in persons with family, or neighborhood, or indirect occupational exposure to asbestos (4-7).

Mesothelioma was the cause of death of a man who had regularly sanded vinyl asbestos floor tile (8). Under simulated conditions of this man's work, a maximum asbestos dust concentration of 1.3 fibers per ml (fibers longer than 5 microns) was found in air samples passed through membrane filters worn by a person sanding vinyl asbestos (8). The type of asbestos now used in domestic floor tile is chrysotile—the same as that used in brake friction materials, according to the Asbestos Information Association. A case of mesothelioma in a brake mechanic has been reported (9).

Commercial friction materials used in the United States for braking passenger cars and trucks contain an average composition of 50 percent chrysotile by weight (10). Asbestos has been used for brake drum linings,

disk pads, and clutch facings for the past 50 years. Jacko and DuCharme (11) estimated that the United States annually uses 103 million pounds of asbestos for brake friction materials and 4.5 million pounds in automotive clutch friction materials.

In 1968 Lynch reported that because of the heat of friction caused by braking, almost all of the asbestos in brake linings is transformed to a nonfibrous mineral, and a small fraction of asbestos escapes as free fiber (12). Jacko and co-workers determined that vehicles in this country emit 158,000 pounds of asbestos per year, of which 11.2 percent is retained in the brake and disposed of during service (13).

Brake mechanics have low and intermittent exposure to asbestos. This exposure has been reported to be 0.79 fiber per ml time-weighted average (fibers longer than 5 microns), with peaks up to 7 fibers per ml when brake parts are being cleaned (14). The standard method for removing dust from brake parts is to blow it out with a

□ Mr. Castleman, an environmental engineer, was with the Center for Science in the Public Interest when this paper was prepared; he is now with the Maryland Public Interest Research Group. Dr. Fritsch is director of the Center for Science in the Public Interest. Ms. Camarota is an occupational health nurse, District of Columbia Department of Human Resources. Ms. Mazzocchi was a research associate, Environmental Cancer Research Project, Environmental Sciences Laboratory, Mount Sinai School of Medicine, New York City. Mr. Crawley is a sanitarian, Baltimore County Department of Health.

Teasheet requests to Barry Castleman, Maryland Public Interest Research Group, 3110 New Main Dining Hall, University of Maryland, College Park, Md. 20742.

compressed air hose. In 1970 several reports (11-18) described the levels of exposure of brake mechanics to asbestos, alternative friction materials, and specific changes in brake repair practices which would reduce the levels of exposure.

Baltimore and Washington Studies

In December 1972, the Baltimore County Department of Health mailed a 1-page mimeographed circular to about 130 establishments which provide brake repair service. These businesses included new car and truck dealerships, certified motor vehicle inspection stations, and other concerns advertising brake repair as a specialty. Some of the establishments initially contacted had either gone out of business or replied that they do not do brake repairs. The circular warned that inhalation of the dust from brake cleaning could cause serious diseases, including cancer, and advised vacuuming brakes of accumulated dust. Additional measures suggested were improved ventilation and the use of face masks (19). Two student volunteers went to 100 of the places on the mailing list 4 months later to ask shop managers what methods they were using in brake repair.

A similar study was started in Washington, D.C., in August 1973. This work was conducted by the Center for Science in the Public Interest and the District of Columbia Department of Human Resources. Of 186 brake service establishments initially contacted, 120 were followed up. Several new methods were tried in order to improve the effectiveness of the warning. The warning leaflet was more eye-catching and readable than the paragraph-form sheet used in Baltimore; the leaflets were handed out by an occupational health nurse to the mechanics themselves—none were mailed; and followup to ascertain the degree of effectiveness was conducted by the same nurse who interviewed the repair shop managers. The Washington study was also featured in a local television program at the time the leaflets were first handed out.

To assure that students trained in brake repair by public vocational schools would learn proper methods, health officials met with appropriate school officials in both locations. At the time they were contacted, school officials in Baltimore and Washington reported that the schools were teaching the "blow out" method of brake dust removal to the trainees.

The standard method of cleaning brakes is "blowing out" with a compressed air hose. In Baltimore, 65 percent (65 per 100) of the brake repair establishments contacted were using this method at the time they received the warning circulars. In Washington, the figure was 91 percent (110 of 120). Most of the managers and workers interviewed had never heard about the hazardous potential of brake dust. Predictably, the responses ranged from annoyance to appreciation.

Of the 65 places in Baltimore initially blowing out brakes, 11 were using either vacuum or wet brushing methods at the time of followup. Four others were still blowing out brakes, but had improved ventilation or provided dust masks, or both, to reduce workers' exposures.

In Washington, only two establishments had changed to wet brushing, but none were vacuuming brakes. Four others provided face masks. Interestingly, two others decided to change brake shoes in all brake repairs, thereby simplifying the problem of dust removal and reducing the mechanics' exposures.

The degree of improvement, indexed by the percentage of establishments converting from blowing out brakes to safer techniques after a single warning, was 23 percent in Baltimore County and 7 percent in Washington. This disparity probably arises more from differences in the methods of the studies than from differences in the study groups.

It may be critically important to approach management at the outset in order to enlist the cooperation needed to implement any changes in practice. A mechanic who is approached directly with a warning may simply disregard it. The mechanic might reason that if the dust were really dangerous, there would be a law requiring the use of preferred methods in brake repair. And the employer, if not asked to participate from the beginning, may well conclude that he need not be concerned with the matter. The failure to involve management may be the main reason why the Washington study produced less gratifying results than the Baltimore study.

Brake warning programs consisting merely of mailed warning notices require little manpower, compared to other health programs. Also, the effort to implement safe techniques in public vocational schools is time well spent.

Conclusion

Over a 7-year period ending in 1976 (20,21), the U.S. standard for time-averaged exposure to asbestos will have been reduced from 5 million particles per cubic

Preventive Health Care

Plan with your physician to schedule regular examinations at least once a year. At each examination, your physician should be able to examine your head and his ears, nose and throat.

If you have, or have had, diabetes, hypertension, asthma, kidney disease, or any other chronic condition, you should see your physician more often.

How You May Contact Us

Please let us know what is bothering you, what you are doing, and what your problems are. In determining our response, your workplace is key.

Contact:
Center for Science in the Workplace
1777 North Street, 4th Floor
Washington, D.C. 20036
(202) 373-6360

Don't Go It To Yourself

To protect yourself and workplace against this disease:

- DON'T clean bottles, cups, wine or beer cans, or be surrounded by this material daily.
- DON'T drink or eat anything that has been in contact with this material.
- DO vacuum out all the dust.
- DO use the party and shower.
- DO use a protective person to address if needed. Several cases of disease have been reported.
- DO use protective clothing. If you are in contact with this material, wear a mask, gloves, and eye protection. If you are in contact with this material, wear a mask, gloves, and eye protection.

What Are The Risks

- Brake linings contain asbestos. Asbestos is a natural mineral fiber that is found in many products.
- The risk of long-term exposure to asbestos is about 1 in 10,000. This risk is higher for people who work in the automotive industry.
- Among a number of the health problems, one is asbestosis, a lung disease that can lead to death.
- The risk of a cancer-related disease, such as lung cancer, is about 1 in 10,000. This risk is higher for people who work in the automotive industry.
- Asbestos is a natural mineral fiber that is found in many products. It is found in many products, including brake linings, brake pads, and brake shoes.
- Asbestos-related diseases, such as asbestosis, lung cancer, and mesothelioma, are caused by exposure to asbestos. Asbestos is a natural mineral fiber that is found in many products.

BRAKE REPAIR WORK CAN BE Hazardous TO YOUR HEALTH



Warning: Asbestos is a known human carcinogen. Exposure to asbestos can cause lung cancer, mesothelioma, and other diseases. Asbestos is found in many products, including brake linings, brake pads, and brake shoes. Asbestos is a natural mineral fiber that is found in many products. Asbestos is a known human carcinogen. Exposure to asbestos can cause lung cancer, mesothelioma, and other diseases. Asbestos is found in many products, including brake linings, brake pads, and brake shoes. Asbestos is a natural mineral fiber that is found in many products.

foot of air to 2 fibers per ml (fibers longer than 5 microns). For asbestos textile plants, this reduction is about 15-fold (22). Present and scheduled standards claim only to protect workers against asbestosis, the disease for which the dose-response relationship is most quantitatively known. The British standards for chrysotile and amosite asbestos, which are comparable to the asbestos standard scheduled to take effect in the United States in 1976, do not purport to provide protection against increased risk of cancer (23,24).

Previously studied cohorts of asbestos workers were exposed to time-averaged concentrations greater than 2 fibers per ml (fibers longer than 5 microns). Current studies of cohorts with time-averaged exposure on the order of 1 fiber per ml (greater than 5 microns in length) may provide evidence of hazard at that level. In view of alarming preliminary findings of pulmonary fibrosis in such a cohort, the National Institute of Occupational Safety and Health has suggested to the Department of Labor that consideration be given to further lowering of the asbestos standard (25).

The average brake mechanic is not aware of the potential hazard of airborne brake dust. Nor is he quick to change time-hardened habits when warned of dangers if he cannot feel their effects. Nonetheless, substantial reduction in asbestos exposures during brake repair can be achieved by simple changes in technique, with the use of equipment already available in most brake service establishments.

In view of the tendency of the accumulating literature to reveal cancer induction from asbestos at progressively lower levels of exposure, mechanics should be advised not to blow out brake parts and to use instead methods which create less airborne dust. The manufacturers of automotive friction materials could easily attach a clear hazard warning to every item sold.

The limited success of both the Baltimore and Washington studies shows the limited efficacy of voluntary compliance with health warnings—the shop managers and the mechanics simply do not have the same regard for a warning that they have for a regulation. The margin of safety, if any, provided by the current asbestos standards has been sharply criticized as insufficient (26). While it is advisable that brake mechanics at least be warned of the potential hazard of their work, it is also apparent that blowing out brakes will be a common practice so long as health regulations permit it.

References

- Cooper, W. C., et al.: Asbestos—the need for and feasibility of air pollution controls. National Academy of Sciences, Washington, D.C., 1971.
- Selikoff, I. J., Hammond, E. C., and Churg, J.: Mortality experiences of asbestos insulation workers. In *Proceedings of the International Conference on Pneumoconiosis*, Johannesburg, 1969, edited by H. A. Shapiro. Oxford University Press, Capetown, South Africa, 1970, pp. 180–186.
- Stell, P. M., and McGill, T.: Asbestos and laryngeal carcinoma. *Lancet* 2: 416–417, Aug. 25, 1973.
- Newhouse, M. L., and Thompson, H.: Mesothelioma of the pleura and peritoneum following exposure to asbestos in the London area. *Br J Ind Med* 22: 261–269 (1965).
- Lieben, J., and Pistawka, H.: Mesothelioma and asbestos exposure. *Arch Environ Health* 14: 559–563 (1967).
- Wagner, J. C., Sleggs, C. A., and Marchand, P.: Diffuse pleural mesothelioma and asbestos exposure in the North Western Cape Province. *Br J Ind Med* 17: 250–271 (1960).
- Dalquen, P., Dabbert, A. F., and Hinz, I.: Epidemiologie der Pleuramesothelioma. Vorläufiger Bericht über 119 Fälle aus dem Hamburger Raum. *Prax Pneumol* 23: 547–558 (1969).
- Murphy, R. L., et al.: Floor tile installation as a source of asbestos exposure. *Am Rev Respir Dis* 104: 576–580, October 1971.
- Sullivan, R. J., and Athanassiadis, Y. C.: Preliminary air pollution survey of asbestos. National Air Pollution Control Administration, APFD 69–27. Raleigh, N.C., 1969, p. 32.
- Harwood, C.: Asbestos air pollution from the wear of brake linings. Illinois Institute of Technology Research Institute, Chicago, April 1972.
- Jacko, M. G., and DuCharme, R. T.: Brake emissions: emission measurements from brake and clutch linings from selected mobile sources. Environmental Protection Agency Report 68-04-0020. Ann Arbor, 1973.
- Lynch, J.: Brake lining decomposition products. *J Air Pollut Control Assoc* 18: 824–826 (1968).
- Jacko, M. G., DuCharme, R. T., and Somers, J. H.: Brake and clutch emissions during vehicle operation. Paper presented at Society of Automotive Engineers Meeting, Detroit, May 1973.
- Hickish, D. E., and Knight, K. L.: Exposure to asbestos during brake maintenance. *Ann Occup Hyg* 13: 17–21 (1970).
- Hatch, D.: Possible alternatives to asbestos as a friction material. *Ann Occup Hyg* 13: 25–29 (1970).
- Knight, K. L., and Hickish, D. E.: Investigations into alternative forms of control for dust generated during the cleaning of brake assemblies and drums. *Ann Occup Hyg* 13: 37–39 (1970).
- Lee, G. L.: Removing dusts from brake assemblies during vehicle servicing—alternative cleaning methods. *Ann Occup Hyg* 13: 33–36 (1970).
- Bentley, M. L.: Control of the use of asbestos-containing friction materials. *Ann Occup Hyg* 13: 31–32 (1970).
- U.S. Senate, Committee on Commerce: Toxic Substances Control Act of 1973. Hearings before the Environment Subcommittee. Statement of B. Castleman. 93d Cong. U.S. Government Printing Office, Washington, D.C., 1973, pp. 117, 349–350.
- Guenther, G. C.: Emergency standard for exposure to asbestos dust. *Federal Register*, vol. 36, No. 234, Dec. 7, 1971, pp. 23207–23208.
- Guenther, G. C.: Standard for exposure to asbestos dust. *Federal Register*, vol. 37, No. 110, June 7, 1972, pp. 11318–11322.
- Lynch, J. R., Ayer, H. E., and Johnson, D. L.: The interrelationship of selected asbestos exposure indices. *Am Ind Hyg Assoc J* 12: 598–604 (1970).
- Hygiene standard for chrysotile asbestos dust. *Ann Occup Hyg* 11: 47–49 (1968).
- Hygiene standards for airborne amosite asbestos dust. *Ann Occup Hyg* 16: 1–5 (1973).
- Key, M. M.: Reopening of asbestos standard. Memorandum to J. Siender, Assistant Secretary of Labor, Occupational Safety and Health Administration. Office of Technical Publications, National Institute for Occupational Safety and Health, Rockville, Md., March 28, 1974.
- Gee, B., and Bouhuys, A.: Action on asbestos. *N Engl J Med* 285: 1317–1318, Dec. 2, 1971.

Preventive Health Care

Men with long experience as brake mechanics should have a physical examination at least once a year and preferably every six months. This should include a chest X-ray. The examining physician should be informed of the man's job and his exposure to asbestos.

If you have, or have had, exposure to asbestos, cigarette smoking is particularly bad. If you smoke, stop.

How You May Contact Us

Please let us know what action you are taking, what ideas you may have to offer, and what problems you encounter in following our suggestions for making your workplace safer.

Contact:

Center for Science in the Public Interest
1779 Church Street, N.W.
Washington, D. C. 20036
(202) 332-6000




BRAKE REPAIR WORK

CAN BE

Hazardous

TO YOUR HEALTH

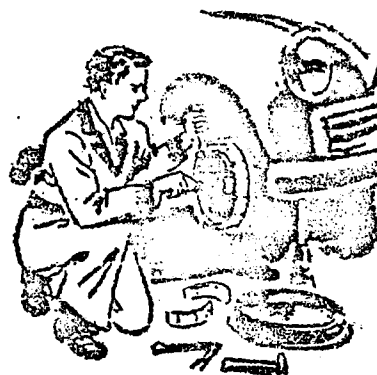

District of Columbia Department of Human Resources
Community Health and Hospital Administration
Occupational and Employee Health Program
Center for Science in the Public Interest

What Are The Hazards?

- Brake linings contain large amounts of asbestos fiber, a substance harmful to your body.
- The risk of lung cancer for people who smoke and work with asbestos is 92-times greater than for people who neither smoke nor work with asbestos.
- Among a number of groups of asbestos workers, one out of every five deaths is due to lung cancer.
- The risk of a serious lung disease, called asbestosis, and cancer of other body sites is about the same for smokers and nonsmokers alike who work with asbestos.
- At present, it is not known what level of exposure to asbestos, if any, is safe. Even a small amount may be dangerous in some circumstances.
- Asbestos-related disease usually takes 20 to 30 years from the time of exposure to become evident. Working with asbestos for even a short time could result in asbestos-related disease later on.

Dos & Don'ts For Your Protection

To protect yourself and others in your workplace against this hazardous substance:

DON'T clean brake assemblies and drums with an air hose. (Fiber dusts generated by this method are dangerously high.)

DON'T brush or, by any other method, raise dust.

DO vacuum out all the fiber you can.

DO wet-wash the parts with paintbrush and kerosene.

DO use a protective mask when exposure to asbestos dust cannot be avoided. Several companies manufacture disposable masks, costing from \$.50 to \$1.50. For information on where these may be purchased locally, call the Center for Science in the Public Interest at (202) 332-6000.

7/25
Mr. E. H. Feierabend
Friction Products Group
Abex Corporation
Winchester, Va. 22601

Mr. Stuart Comins
Auto Friction Corporation
651 Andover Street
Lawrence, Mass. 01842

Mr. D. E. Stone
Friction Materials Division
Bendix Corporation
P. O. Box 238
Troy, New York 12181

Mr. William Simon
Brassbestos Manufacturing Corp.
45 East 5th Street
Paterson, New Jersey 07524

Mr. Harry Wagner
Carlisle Corporation
Molded Materials Division
P. O. Box P
Ridgway, Pa. 15853

Mr. R. J. Kick
Staff Engineer Products Service
Delco-Moraine Division
General Motors Corporation
1420 Wisconsin Boulevard
Dayton, Ohio 45401

Mr. F. T. Gatke
Gatke Corporation
228 North La Salle Street
Chicago, Illinois 60601

Mr. F. C. Skelton
Grizzly Friction Products
Maremont Corporation
700 West Caroline Street
Paulding, Ohio 45879

Mr. Carl Zahler
Hayes-Albion Corporation
Friction Products Plant
P.O. Box 3190 C.R.S.
Johnson City, Tennessee 37601

Mr. T. J. Laher
Lasco Brake Products Corporation, Ltd.
2615 Magnolia Street
Oakland, California 94607

Mr. Murrell Amos
Molded Industrial Friction Corp.
327 Walnut Street
Prattville, Ala. 36707

Mr. Ab Lechter-Lopez
H. K. Porter Co., Inc.
Thermoid Division
601 Grant Street
Pittsburgh, Pa. 15219

Mr. J. H. Marsh
Raybestos-Manhattan, Inc.
~~100 Oakview Drive~~
Trumbull, Connecticut 06611

Mr. F. W. Barton, Jr.
Reddaway Mfg. Co., Inc.
32 Euclid Avenue
Newark, New Jersey 07105

Mr. W. M. Sleeth
Royal Industries Brake Products
Stewart Lane
Danville, Kentucky 40422

Mr. J. A. Penberthy
Safeguard Manufacturing Corp.
P. O. Box 985
Tappahannock, Virginia 22560

Mr. J. Gallagher
Thiokol Chemical Corporation
Panelyte Industrial Division
Enterprise Avenue
Trenton, New Jersey 08604

Mr. G. A. Carrigan
The S. K. Wellman Corporation
200 Egbert Road
Bedford, Ohio 44146

Mr. Lee Burgess
Tri-State Industrial Supply
(Wheeling Brake Block)
3600-3608 Jacob Street
Wheeling, West Virginia 26003

F-21

FMSI 03299