




Burnham Corporation

BOILERS and RADIATORS


Irvington-on-Hudson, N. Y.

There's a Burnham for Every Purpose—Write for Descriptive Catalogs

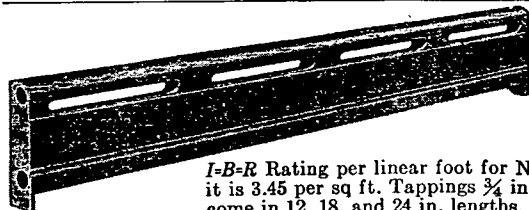


Burnham BASE-RAY®
Radiant Baseboard
— Two Sizes, No. 7
and No. 9 (Cast Iron)


I-B-R Rating per linear foot for No. 7 is 2.35 and for No. 9 it is 3.45 per sq ft. Tappings $\frac{3}{4}$ in. top and bottom. Sections come in 12, 18, and 24 in. lengths. New matching sheet metal baseboard extensions and accessories available.




New HOLIDAY Cast-Iron Gas Boiler
A.G.A. approved for manufactured, natural, mixed or LP Gases and *I-B-R* approved and rated for water from 300 to 1100 sq ft; for steam 160 to 610 sq ft supplied with or without domestic hot water.




PACEMAKER® Boiler for oil firing. *I-B-R* Ratings 270 to 710 sq ft for Steam and 490 to 1270 for Water. A cast-iron vertical flue boiler. Can be equipped with tankless or storage type domestic hot water coils.

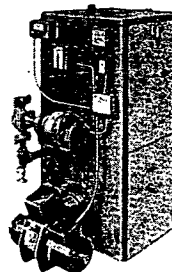


PACE-PAK® Boilers—*I-B-R* Net 565 sq ft and 810 sq ft for Water. Design same as PACEMAKER. Delivered in one crate ready for installation with all controls and wiring factory installed for assured performance.



Radiant

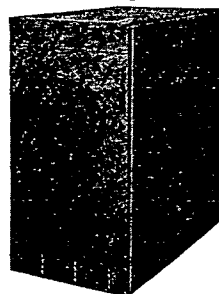

YELLO-JACKET Boiler (shown with extended Jacket). All fuel, convertible. *I-B-R* Ratings 305 to 935 sq ft for Steam and 490 to 1600 sq ft for Water.



Slenderized

BURNHAM RADIANT RADIATORS—Two heights 20 and 23 in. Ratings 2.25 sq ft per section and 3.40 sq ft per section respectively.

BURNHAM SLENDERIZED RADIATORS—Three to six tubes in four heights 19 in. to 32 in. Ratings are from 1.6 sq ft per section to 3.7 sq ft per section.



Burnham Corporation



BOILERS and RADIATORS

Irvington-on-Hudson, N. Y.

There's a Burnham for Every Purpose—Write for Descriptive Catalogs

PACE-KING® BOILER


A new Burnham Series, exclusively oil fired, for apartment houses, schools, hospitals, commercial installations, etc. Its vertical flue design is engineered similar to PACEMAKER and PACE-PAK... low internal draft loss... lower stack temperatures... lower chimney design... no baffles used. Provided with tankless hot water heaters with capacities from 6 to 10 gpm. Available in 14 models with *I-B-R* ratings from 1100 to 4500 for Steam and 1925 to 7200 for Water. Built for safety and dependability according to the ASME Construction Code and the *I-B-R* Rating and Testing Code.

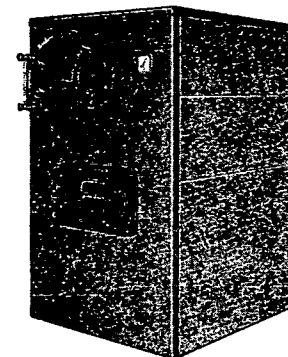

PACE-KING SECTIONS are designed with hundreds of efficient fins for fast heat exchange and fuel economy. Can easily be passed through existing doorways. Sections are reversible... this feature also allows wider choice of location since outlet connections and clean out panels can be placed on either side. Boiler can be fired from front or rear. Long water legs provide plenty of room for combustion.



No. 1, 2, 3 and 36 in. Series and 50 in. Twin Series—Famous Burnham 3-times-back-and-forth fire travel; for all fuels. 230 to 14,600 sq ft for Steam; 370 to 23,360 sq ft for Water.



Welded Steel Boiler—Compact type—Capacities from 2500 to 35,000 sq ft for Steam and 4800 to 56,000 sq ft for Water. Furnished for coal, oil or stoker firing. SBI Rated.