

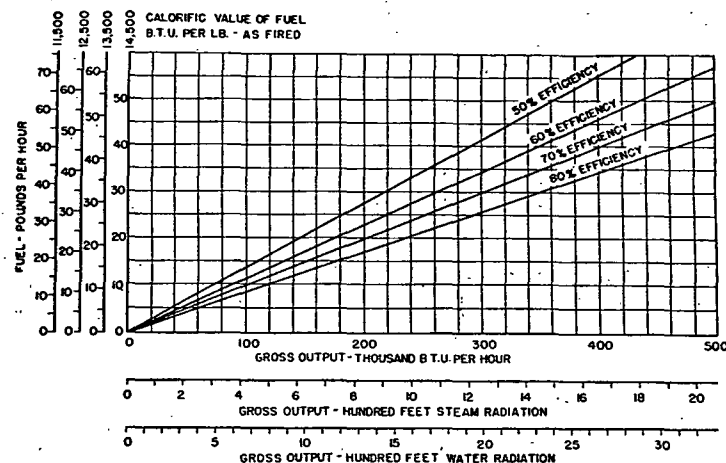


FIG. 21. COAL FUEL BURNING RATE CHART

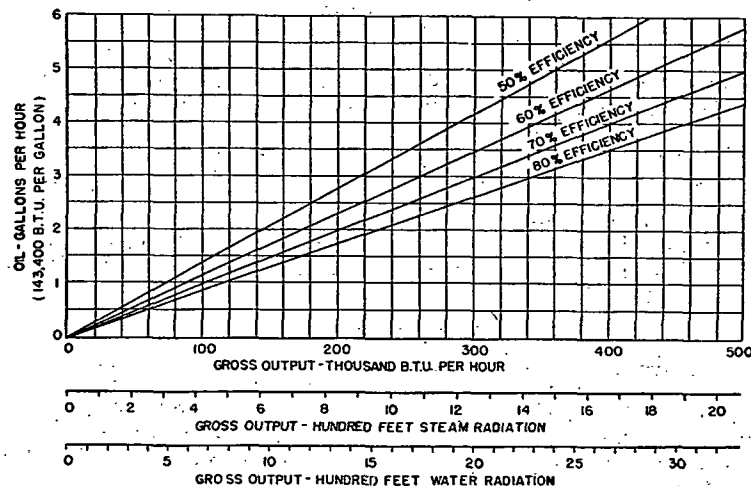


FIG. 22. OIL FUEL BURNING RATE CHART\*

\* This chart is based upon No. 3 oil having a heat content of 143,400 Btu per gallon. If other grades of oil are used multiply the value obtained from this chart by the following factors: No. 1 oil (139,000 Btu per gallon) 1.032; No. 2 oil (141,000 Btu per gallon) 1.017; No. 4 oil (144,500 Btu per gallon) 0.992; No. 5 oil (146,000 Btu per gallon) 0.982; and No. 6 oil (150,000 Btu per gallon) 0.958.

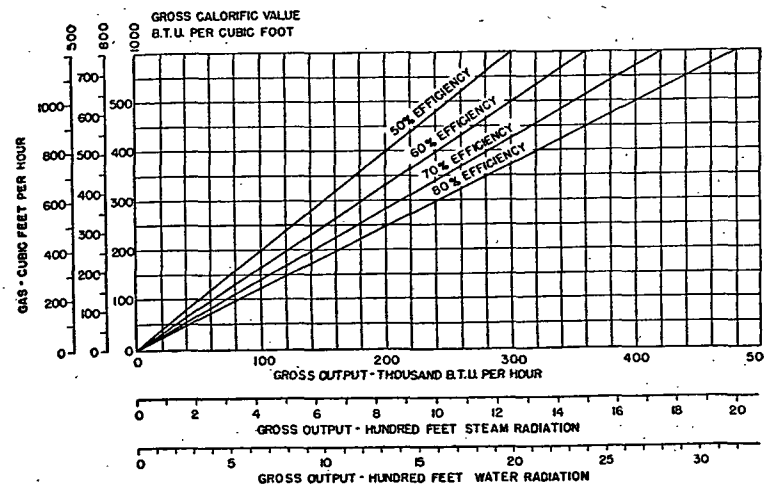


FIG. 23. GAS FUEL BURNING RATE CHART

The correct fuel burning rate can be determined directly from the several charts for oil or gas burning installations, as these customarily operate on a strictly intermittent basis. These fuel burning devices usually introduce the fuel at a single fixed rate during the on periods and this rate should be sufficient to carry the gross load. In the case of coal stokers, which are usually capable of variable rates of firing, it is desirable to operate at as low a rate as weather conditions will permit, but the maximum firing rate of the stoker should be sufficient to carry the gross load. This rate may be determined by the same method as used for oil or gas.

## REFERENCES

<sup>1</sup> Domestic Burners for Pennsylvania Anthracite (Underfeed Type), (U. S. Department of Commerce, National Bureau of Standards, Commercial Standard No. CS48-40).

<sup>2</sup> *Stoker Manufacturers Association Manual: Industry Standards, Recommended Practices, Technical Information.* Published by Stoker Manufacturers Association, 307 N. Michigan Ave., Chicago 1, Ill.

<sup>3</sup> Code for Determination of Rated Capacities of Anthracite Underfeed Stokers, adopted June 1, 1944, and a Code for Determination of Rated Capacities of Bituminous Underfeed Stokers, adopted May 3, 1944. See *Stoker Manufacturers Association Manual*.

<sup>4</sup> Automatic Mechanical Draft Oil Burners Designed for Domestic Installations (U. S. Department of Commerce, National Bureau of Standards, Commercial Standard No. CS75-42). Flue Connected Oil Burning Space Heaters Equipped with Vaporizing Pot Type Burners (U. S. Department of Commerce, National Bureau of Standards, Commercial Standard No. CS101-43). Warm-Air Furnaces Equipped with Vaporizing Pot-Type Oil Burners (U. S. Department of Commerce, National Bureau of Standards, Commercial Standard No. CS(E)104-46). Oil-Burning Floor Furnaces Equipped with Vaporizing Pot-Type Burners (U. S. Department of Commerce, National Bureau of Standards, Commercial Standard C. S. 113-44).