FUSIBLE SERVICE EQUIPMENT

Parallel Connected Main and Branch Circuits

WHEN ORDERING SPECIFY

- Catalog number

SINGLE PHASE—3 Wire Solid Neutral—120/240 Volts A-c—Grounded Neutral—Main (lighting) pullout controls plug fuse circuits and sub-feed taps.

Main Lug Amps.	❷ Lighting Pullout	Branch Circuits		General Purpose Panel			
				Catalog Number		Price	Ship. Wt. Lbs.
		❷ 2 Pole Pullout	Plug Fuse	Surface Mounted	Flush Mounted		
100-200 AMPERE SERVICE—6 PULLOUTS							
100	1-60A.	1-60A. and 4-30A.	12	4335H4612-S	4335H4612-F	$79.	43
125			12	4344H4612-S	4344H4612-F	79.	43
150			12	4346H4612-S	4346H4612-F	79.	43
200			12	4348H4612-S	4348H4612-F	89.	43
100	1-60A.	2-60A. and 3-30A.	12	4335H3612-S	4335H3612-F	79.	43
125			12	4344H3612-S	4344H3612-F	79.	43
150			12	4346H3612-S	4346H3612-F	79.	43
200			12	4348H3612-S	4348H3612-F	89.	43

APPROXIMATE DIMENSIONS

Catalog Number	General Purpose Panels Dimensions in Inches		
	Wide A	High B	Deep C
4335-H3612, H4612	12⅜	30⅝	3⅞
4344-H3612, H4612	12⅜	30⅝	3⅞
4346-H3612, H4612	12⅜	30⅝	3⅞
4348-H3612, H4612	12⅜	30⅝	3⅞

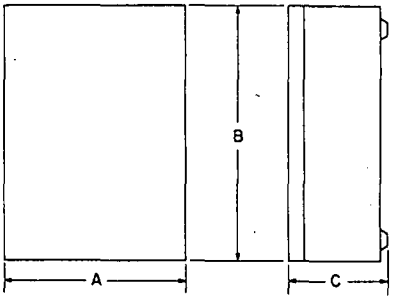

200 AMPERE—RAINTIGHT—YARD POLE TYPE

Main Lug Amps.	❷ Pullouts		Raintight Panel with 2½" Hub			❶ Raintight Panel without Hub		
	Main	Auxiliary	Catalog Number	Price	Ship. Wt. Lbs.	Catalog Number	Price	Ship. Wt. Lbs.
200	2-100A.	1-30A.	4348-H1300R-25	$103.80	48	4348-H1300R	$96.	47
		1-60A.	H300R-25	103.00	48	H300R	96.	47
		1-30A. & 1-60A.	H1400R-25	111.80	49	H1400R	104.	47

APPROXIMATE DIMENSIONS

Catalog Number	Raintight Panels Dimensions in Inches		
	Wide A	High B	Deep C
4348-H1300R	15⅝	26⅜	4⅞
H300R	15⅝	26⅜	4⅞
H1400R	15⅝	26⅜	4⅞

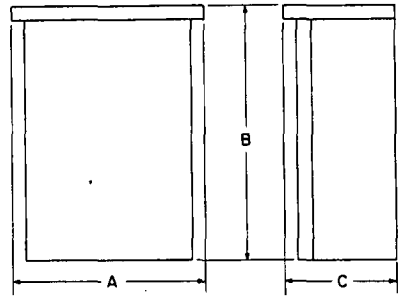

❶ Raintight panels have opening in top covered by a blank plate. Interchangeable hubs may be selected from table, page 30.

❷ Pullouts also HP rated. 30 ampere unit, 1½ HP standard, 3 HP maximum. 60 ampere unit, 3 HP standard, 10 HP maximum. 100 ampere unit, 7½ HP standard, 15 HP maximum.