

PLAINTIFF'S
EXHIBIT

KM-147

PACO-CRETE

RECOMMENDATIONS FOR USE

PACO-CRETE CONCRETE SURFACING COMPOUND is designed to give interior concrete construction a smooth, level finish. This material should be used as a base coat for PACO-TEX WALL TEXTURE, DECO-TEX ACOUSTIC CEILING SPRAY, or KELLY-MOORE TOP QUALITY LATEX PAINT.

DIRECTIONS FOR USE


PREPARATION: Remove all loose particles and grind protruding irregularities to surface level. Fill all voids deeper than 1/4 inch with concrete.
CAUTION: Remix before using. Thinning is not advisable and should only be done with clean, cold water. Not for exterior surfaces.

APPLICATION

PACO-CRETE can be used with hand or machine tools. The number of coats required are determined by the condition of the concrete surface and desired finish. For satisfactory results, this material must have good drying conditions for a minimum of 24 hours between coats.

Paco Textures Corporation

San Carlos, Calif.

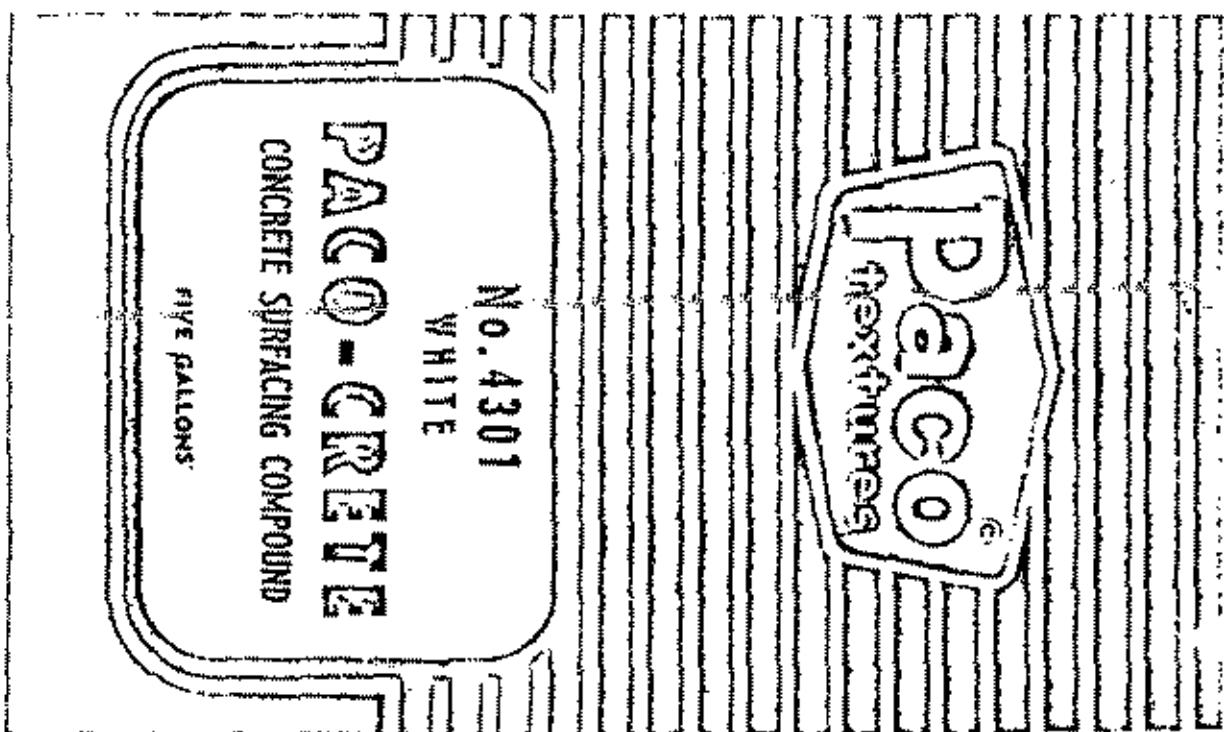

PLAINTIFF'S
EXHIBIT

WV-12229

PLAINTIFF'S
EXHIBIT

14357-00

KM BB 1657