


SOLID-COTE FINISH

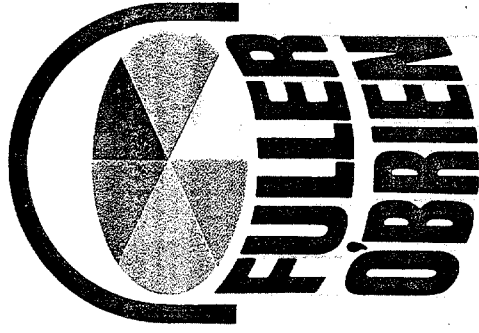

**EXTERIOR
FUL-STAIN**

665-11 OLIVE NITE

NET 128 FL. OZ. (1 GAL.)

REGISTERED

REG'N. No.	31
Code No.	015
Date	1-

N21598

FUL-STAIN (SOLID-COTE)

This quality exterior wood finish is richly pigmented to provide exceptional hiding qualities. Ful-Stain is designed for use on all new or previously painted or stained exterior wood surfaces.

OUTSTANDING FEATURES

Rich Natural Color

High Hiding

Flows on Smoothly and Easily

Exceptional Durability

DRYING TIME: 18 hours under normal conditions. Recoat in 24 hours.

COVERAGE: Approximately 400 square feet per gallon on smooth surfaces. Rough or porous surfaces will require more Ful-Stain.

THINNING: None required. If thinning is desired, use up to 1/2 pint of paint thinner per gallon of material. For airless spray, thinning is not recommended.

PREPARATION: Surfaces must be clean, dry and free from dirt, wax, oil, grease and other surface contaminants. Remove all loose, peeling or flaking paint from previously painted surfaces; then feather in edges. Previously painted surfaces which are extremely chalky should be primed with O'Brien's Seventy-Five Primer before painting for best results.

APPLICATION: Apply by brush, roller, conventional or airless spray.

TINTING: Use Base No. 11-2 and 3 with lead-free Iron-Air Universal Tinting Colors according to Sympson's Color System formulas.

CLEAN-UP: Clean spills and splatters with paint thinner. Painting tools should be thoroughly cleaned with paint thinner.

(F08)

CAUTION! COMBUSTIBLE! CONTAINS LEAD. HARMFUL IF SWALLOWED. Keep away from heat and open flame. Do not apply on window sills, toys, furniture or interior surfaces of rooms which may be used by children. Avoid prolonged contact with skin and breathing of vapor or spray mist. Close container after each use. Use with adequate ventilation. KEEP OUT OF THE REACH OF CHILDREN.

FUL-STAIN (Solid-Cote) OLIVE MIX

Pigment	1.57%
Titanium Dioxide	37.7%
C. P. Chrome Yellow	11.9%
Chromium Oxide	4.58%
Raw Umber	8.20%
Silicates	76.07%
	100.00%

Vehicle


Soyab Alkyd Resin	51.43%
Processed Linseed Oil	25.22%
Mineral Spirits and Driers	18.98%
	57.80%
	100.00%

(BAOW)

MFG. BY
THE O'BRIEN CORPORATION
 South Bend, Ind. 46621
FULLER O'BRIEN CORPORATION
 South San Francisco, Cal. 94080

Oklahoma City, Okla. 73107
DIXIE O'BRIEN CORPORATION
 Brunswick, Ga. 31520

SOLID-COTE FINISH

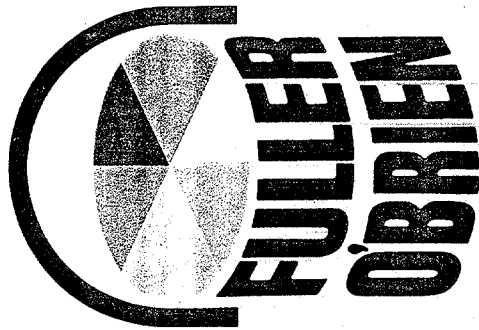

**EXTERIOR
FUL-STAIN**

665-14 SAFARI BLACK
NET 128 FL. OZ. (1 GAL.)

REGISTERED

REG'N. No.	37680
Code No.	01650
Date	7-1-70

FUL-STAIN (SOLID-COTE)

This quality exterior wood finish is richly pigmented to provide exceptional hiding qualities. Ful-Stain is designed for use on all new or previously painted or stained exterior wood surfaces.

OUTSTANDING FEATURES

- Rich Natural Color
- High Hiding
- Flows on Smoothly and Easily
- Exceptional Durability

DRYING TIME: 18 hours under normal conditions. Recoat in 24 hours.

COVERAGE: Approximately 400 square feet per gallon on smooth surfaces. Rough or porous surfaces will require more Ful-Stain.

THINNING: None required. If thinning is desired, use up to 1/2 pint of paint thinner per gallon of material. For airless spray, thinning is not recommended.

PREPARATION: Surfaces must be clean, dry and free from dirt, wax, oil, grease and other surface contaminants. Remove all loose, peeling or flaking paint from previously painted surfaces; then, "feather-in" edges. Previously painted surfaces which are extremely chalky should be primed with O'Brien "Seventy-Five" House Paint Primer for best results.

APPLICATION: Apply by brush, roller, conventional or airless spray.

TINTING: Tint Bases No. 1, 2 and 3 with lead-free Tone-All Universal Tinting Colors according to Symphonic Color System formulas.

CLEAN-UP: Clean spills and splatters with paint thinner. Painting tools should be thoroughly cleaned with paint thinner.

(P105)


CAUTION! COMBUSTIBLE! CONTAINS LEAD. HARMFUL IF SWALLOWED. Keep away from heat and open flame. Do not apply on window sills, toys, furniture or interior surfaces of rooms which may be used by children. Avoid prolonged contact with skin and breathing of vapor or spray mist. Close container after each use. Use with adequate ventilation. KEEP OUT OF THE REACH OF CHILDREN.

FUL-STAIN (Solid Cote) SAFARI BLACK

Pigment	16.92%
Titanium Dioxide	12.13%
Zinc Yellow	7.30%
Methylated Cellosolve	99%
Carbon Black	89%
Silica	78.66%
	100.00%
Vehicle	23.38%
Soya Alkyl Resin	25.12%
Processed Linseed Oil	16.97%
Mineral Spirits and Driers	57.96%
	100.00%
	(R40W)

MFG. BY
THE O'BRIEN CORPORATION
 South Bend, Ind. 46621 • Baltimore, Md. 21213 • Oklahoma City, Okla. 73107
FULLER O'BRIEN CORPORATION
 South San Francisco, Ca. 94080
DIXIE O'BRIEN CORPORATION
 Brunswick, Ga. 31520

SOLID-COTE FINISH

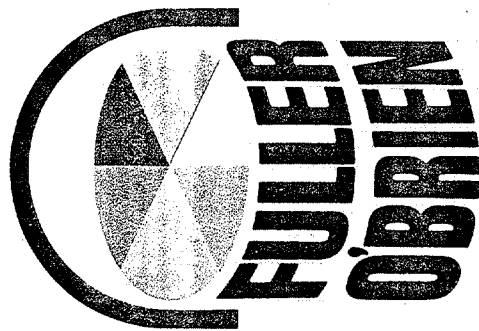

**EXTERIOR
FUL-STAIN**

665-02 SEAL SKIN
NET 128 FL. OZ. (1 GAL.)

REGISTERED
REG'N. No. 25600
Code No. 01050
Date 7-1-70

FUL-STAIN (SOLID-COTE)

This quality exterior wood finish is richly pigmented to provide exceptional hiding qualities. Ful-Stain is designed for use on all new or previously painted or stained exterior wood surfaces.

OUTSTANDING FEATURES

Rich Natural Color

High Hiding

Flows on Smoothly and Easily

Exceptional Durability

DRYING TIME: 18 hours under normal conditions. Repeat in 24 hours.

COVERAGE: Approximately 400 square feet per gallon on smooth surfaces. Rough or porous surfaces will require more Ful-Stain.

THINNING: None required. If thinning is desired use up to 1/2 pint of paint thinner per gallon of material. For airless spray, thinning is not recommended.

PREPARATION: Surfaces must be clean, dry and free from dirt, wax, oil, grease and other surface contaminants. Remove all loose, peeling or flaking paint from previously painted surfaces; then, "feather-in" edges. Previously painted surfaces which are extremely chalky should be primed with O'Brien "Seventy-Five" House Paint Primer for best results.

APPLICATION: Apply by brush, roller, conventional or airless spray.

TINTING: Tint Bases No. 1, 2 and 3 with lead-free Tone-All Universal Tinting Colors according to Symphonic Color System formulas.

CLEAN-UP: Clean spills and splatters with paint thinner. Painting tools should be thoroughly cleaned with paint thinner.

CAUTION! COMBUSTIBLE
CONTAINS LEAD. HARMFUL IF SWALLOWED. Keep away from heat and open flame. Do not apply on window sills, picture or interior surfaces of rooms which may be occupied by children. Avoid prolonged contact with skin and breathing vapor or spray mist. Clean container after each use. Use adequate ventilation. KEEP OUT OF THE REACH OF CHILDREN.

FUL-STAIN (Solid-Cote)
Pigment
C.P. Brown Iron Oxide
Raw Umber
Silicates

Vehicle
Soyab Alkyd Resin
Processed Linseed Oil
Mineral Spirits and Driers

(PYOE)

MFG. BY

THE O'BRIEN CORPORATION

South Bend, Ind. 46621 • Baltimore, Md. 21213 • Oklahoma City, Okla. 73107

FULLER-O'BRIEN CORPORATION

DIXIE-O'BRIEN CORPORATION

South San Francisco, Ca. 94080

Brunswick, Ga. 31520