

TABLE 43. PROPERTIES OF SATURATED STEAM—Continued

VACUUM IN IN. OF MERCURY OR GAGE PRESSURE IN LB.	ABSOLUTE PRESSURE IN LB. PER SQ. IN.	TEMPERATURE IN DEG. FAHR.	TOTAL HEAT ABOVE 32 DEG. FAHR.		LATENT HEAT OF THE STEAM IN B.T.U.	VOLUME IN CU. FT. OF 1 LB. OF STEAM
			B.t.u. in the Water	B.t.u. in the Steam		
0.00	14.70	212.00	180.0	1150.4	970.4	26.79
0.3	15.	213.00	181.0	1150.7	969.7	26.27
1.3	16.	216.3	184.4	1152.0	967.6	24.79
2.3	17.	219.4	187.5	1153.1	965.6	23.38
3.3	18.	222.4	190.5	1154.2	963.7	22.16
4.3	19.	225.2	193.4	1155.2	961.8	21.07
5.3	20.	228.0	196.1	1156.2	960.0	20.08
6.3	21.	230.6	198.8	1157.1	958.3	19.18
7.3	22.	233.1	201.3	1158.0	956.7	18.37
8.3	23.	235.5	203.8	1158.8	955.1	17.62
9.3	24.	237.8	206.1	1159.6	953.5	16.93
10.3	25.	240.1	208.4	1160.4	952.0	16.30
15.3	30.	250.3	218.8	1163.9	945.1	13.74
20.3	35.	259.3	227.3	1166.8	938.9	11.89
25.3	40.	267.3	236.1	1169.4	933.3	10.49
31.3	46.	275.8	244.8	1172.0	927.2	9.20
35.3	50.	281.0	250.1	1173.6	923.5	8.51
41.3	56.	288.2	257.5	1175.7	918.2	7.65
45.3	60.	292.7	262.1	1177.0	914.9	7.17
51.3	66.	299.0	268.5	1178.8	910.2	6.56
61.3	76.	308.5	278.3	1181.4	903.0	5.74
71.3	86.	317.1	287.2	1183.6	896.4	5.10
81.3	96.	324.9	295.3	1185.6	890.3	4.60
90.3	105.	331.4	302.0	1187.2	885.2	4.23
100.3	115.	338.1	309.0	1188.8	879.8	3.88
125.3	140.	353.1	324.6	1192.2	867.6	3.219
140.3	155.	361.1	332.9	1194.0	861.0	2.920
150.3	165.	366.1	338.2	1195.0	856.8	2.753
165.3	180.	373.1	345.6	1196.4	850.8	2.533
175.3	190.	377.6	350.4	1197.3	846.9	2.406
200.3	215.	388.0	361.4	1199.2	837.9	2.138

CAPACITIES OF STEAM HEATING RISERS

AS AFFECTED BY CRITICAL VELOCITY OF STEAM AND CONDENSATE MIXTURES

THE flow of steam in pipes has been the object of a great many investigations in the past, both practical and theoretical. These investigations have resulted in a large number of formulae and expressions giving relationships between weight of steam flowing, density of steam, pressure drop, and diameter of the pipe. This phase of the subject,

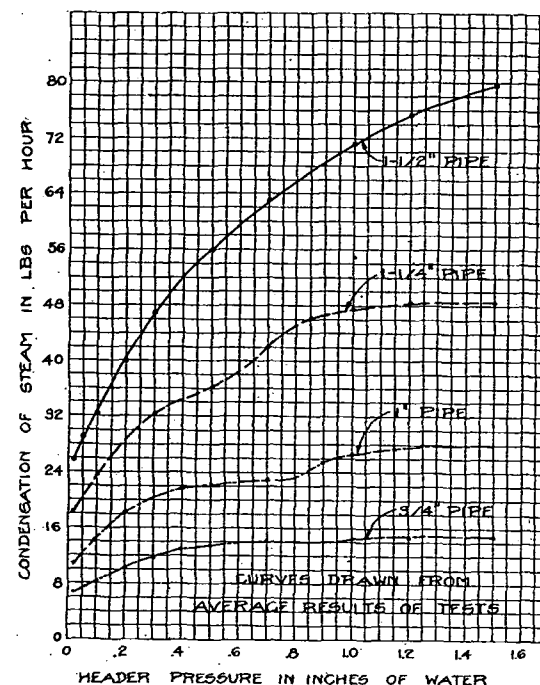


FIG. 28. CURVES SHOWING RELATION OF TOTAL CONDENSATION TO HEADER PRESSURE

however, has received very little attention and very little appears in the literature on it.

By the term *critical velocity*, as used in connection with steam and condensate mixtures, is meant the velocity at which the flow of steam and

Material for this section was prepared especially for THE GUIDE 1923 by F. C. Houghten, Pittsburgh, Pa.