

Mundet Cork Corporation

65 S. Eleventh St.

INSULATION DIVISION

Brooklyn 11, N. Y.

Manufacturers of Corkboard, Cork Pipe Covering, Compressed Machinery Isolation Cork, Natural Cork Isolation Mats, and all kinds and varieties of Cork Specialties.

Authorized contractors for high temperature insulation.

Mundet Branches

ALBANY 5, N. Y.	CHICAGO 21, ILL.	HOUSTON 1, TEX.	NEW ORLEANS 16, LA.
ATLANTA, GA.	CINCINNATI 2, OHIO	JACKSONVILLE 7, FLA.	PHILADELPHIA 39, PA.
BROOKLYN, N. Y.	DALLAS 1, TEX.	KANSAS CITY 7, MO.	ST. LOUIS 4, MO.
BOSTON (No. Cambridge) 40, MASS.	DETROIT 26, MICH.	LOS ANGELES 31, CALIF.	SAN FRANCISCO 7, CALIF.

Mundet Distributors are Located in the Following Cities—Names and Addresses on Request


AMANA, IA.	HARTFORD, CONN.	NORFOLK, VA.	SALT LAKE CITY, UTAH
BALTIMORE, MD.	JOHNSON CITY, TENN.	OKLAHOMA CITY, OKLA.	SEATTLE, WASH.
BUFFALO, N. Y.	MEMPHIS, TENN.	PORTLAND, OREGON	TUCSON, ARIZ.
DENVER, COLO.	MINNEAPOLIS, MINN.	RICHMOND, VA.	TULSA, OKLA.
EL PASO, TEX.	NASHVILLE, TENN.	ROCHESTER, N. Y.	UTICA, N. Y.

Mundet "Jointite" Corkboard

—for all low temperature insulation and for acoustical correction. 100 per cent pure cork, fabricated in accordance with U. S. Government Master Specifications and unsurpassed in its field. Sold in standard 12 in. x 36 in. sheet. Standard thicknesses, 1/2 in., 1 in., 1 1/2 in., 2 in., 3 in., 4 in., 6 in.

Mundet "Jointite" Cork Pipe Covering

Shown below, with fitting cover. Protects all types of low temperature lines. Made in 3 thicknesses, with complete line of standard covers, suitable for pipes carrying sub-zero to 50 F temperature.

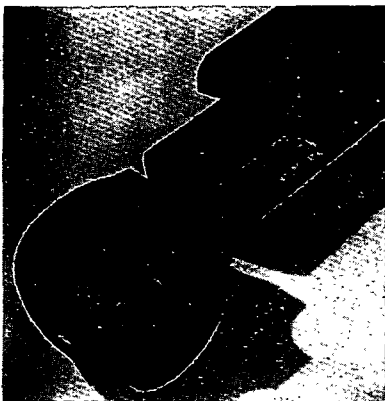


Section of Mundet Moulded Cork Pipe Covering, with fitting. The pipe covering is made in sections 36 in. long, to fit all sizes of pipes.

Mundet Cork Vibration Isolation

Machinery vibration encountered in heating and ventilating work is effectively controlled by the use of Mundet Natural Cork Isolation Mats. These consist of blocks of pure cork, held together within a rigid steel frame or bound with asphalt

paper applied with hot asphalt top and bottom. Mundet steel bound mats are usually used under exposed mounts; asphalt paper bound mats under concrete foundations of the envelope type. Mats are made to fit under any type of machine foundation. For loads exceeding 2000 lb per square foot, we manufacture Mundet Machinery Isolation Cork, which is a board form of compressed granulated cork, available in 3 densities. All types of isolation are furnished in 1 in., 1 1/2 in., 2 in., 3 in., 4 in., and 6 in. thicknesses, depending on class of service.

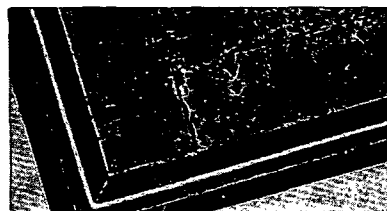

Above close-up of Mundet Natural Cork Isolation Mat shows how the blocks of cork are held together within a rigid steel frame.

Engineering and Specification Service

Our engineering department is at the service of Architects and Engineers, to assist and advise in the preparation of specifications pertaining to cork. This service is available without obligation to any one who has a low temperature insulation or a vibration isolation problem. Our latest catalogue will be sent on request. It is replete with information and data of value to every specification writer whose field touches our products.

Mundet Contract Service

Covers the complete installation of our products, in accordance with best established practice. Divided responsibility is avoided. Materials and workmanship are guaranteed.

The Pacific Lumber Company

PALCO WOOL INSULATION

100 Bush Street
SAN FRANCISCO

35 E. Wacker Drive
CHICAGO

5225 Wilshire Blvd.
LOS ANGELES

122 East 42nd St.
NEW YORK


HOUSE
INSULATION

INSTALLED IN
CEILINGS AND WALLS

PALCO
INSULATION
WOOL

TRADE MARK REG. U. S. PAT. OFFICE

COLD
STORAGE
INSULATION

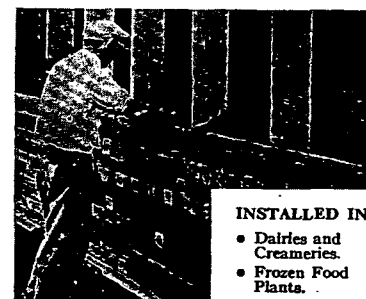

PALCO WOOL INSULATION

Provides maximum protection against the intrusion of heat or cold. Readily installed in upper ceilings of uninsulated homes.

Can be installed by blower or handpack methods.

**FLAME PROOF
SAFERIZED**

INSTALLED IN:

- Dairies and Creameries.
- Frozen Food Plants.
- Warehouses.
- Refrigerators.
- Pre-cooling Plants.
- Ice Plants.
- Fur Vaults.
- Fruit and Produce Storage, etc.

EIGHT POINTS OF PALCO WOOL SUPERIORITY

1. Thermal Efficiency: The established conductivity of PALCO WOOL is .26 Btu per hour per sq ft per inch of thickness per degree F difference in temperature by the Flat Plate Method.

2. Non-Settling: The fibres of PALCO WOOL possess such resilience that no settlement in a wall can occur under the most severe conditions of vibration.

3. Moisture Resistant: The fibres of PALCO WOOL are entirely lacking in capillarity and have little attraction for moisture, enabling it to remain dry and efficient when in use.

4. Permanent: The inherent anti-septic qualities of PALCO WOOL make the existence of fungus impossible. The fibres retain their resilience indefinitely.

5. Vermin Repellent: PALCO WOOL is distasteful and repellent to rodents and insects.

6. Fire Resistant: PALCO WOOL, like the Redwood bark it comes from, is inherently fire resistant. As an additional protection it is *Saferized* to make it flame-proof.

7. Odor Proof: PALCO WOOL is odorless itself and does not absorb or give off odors.

8. Economical: PALCO WOOL is light in weight and low in density, offering exceptional thermal efficiency per dollar invested.

WRITE FOR INSULATION MANUALS

- House Insulation Manual.
- Cold Storage Manual.
- Frozen Food Locker Plant Manual.
- How to Build a Plant Manual.

Get your copies today.