



BALDWIN-EHRST-HILL, INC., TRENTON, N. J.

DATA SHEET

Product: Mono-Block

Description: Felted rigid block made of Spun Mineral Wool with a clay binder, by a patented Baldwin-Ehrst-Hill process. With long mineral fibers laid down in interwoven layers, it has greater tensile strength and better resistance to damage in handling.

Usage: For heated surfaces on steam boilers, ovens, kilns, furnaces, refinery towers, etc.

Features: Light Weight - Maximum Temperature Range - up to 1800 F. Easy to handle and apply, cuts with a knife, surface adjusts to irregularities for snug fit. Moisture-resistant, non-corrosive, stable in service and incombustible.

Technical Data: Maximum Temperature Limit - 1800 F.
 Sizes: Length - 18, 36 inches - Width - 6, 12 and 24 inches
 Thicknesses: 1, 1-1/2, 2, 2-1/2, 3, 3-1/2 and 4 inches
 Density: Approximately 15 pounds per cubic foot
 Thermal Conductivity - (See curve also)

<u>Mean Temp</u>	<u>· K</u>
200F	.36
400	.42
600	.51
800	.625
1000	.755
1200	.90

Compressive Strength - 10 lb./sq. in. @ 5% deformation
 Flexural Strength - 40 lb./sq. in.
 Linear Shrinkage after heating at 1800 F- less than 4%

Chemical Analysis (typical)

SiO ₂	-	43%
Al ₂ O ₃	-	11%
CaO	-	29%
MgO	-	6%
FeO	-	8%

Surface Temperatures and Heat Losses - See Charts
 Thicknesses Recommended - See Catalog

Specifications: Federal Specification HH-1-564, Form 1, Types A, B, C, D
 Commercial Standard CS-117, Block, Classes A, C, D
 ASTM: C 392
 U. S. Coast Guard, Structural Insulation, 2", 164.007/23/0


Packages: Corrugated boxes - 36 bd. ft. each - (Exception:
 37.5 bd. ft. for 2-1/2" and 42 bd. ft. for 3-1/2" thickness)

231630



BALDWIN-EHRETT-HILL, 800 Macungie Avenue, Trenton 2, New Jersey

Thermal Conductivity of B-E-H MONO-BLOCK

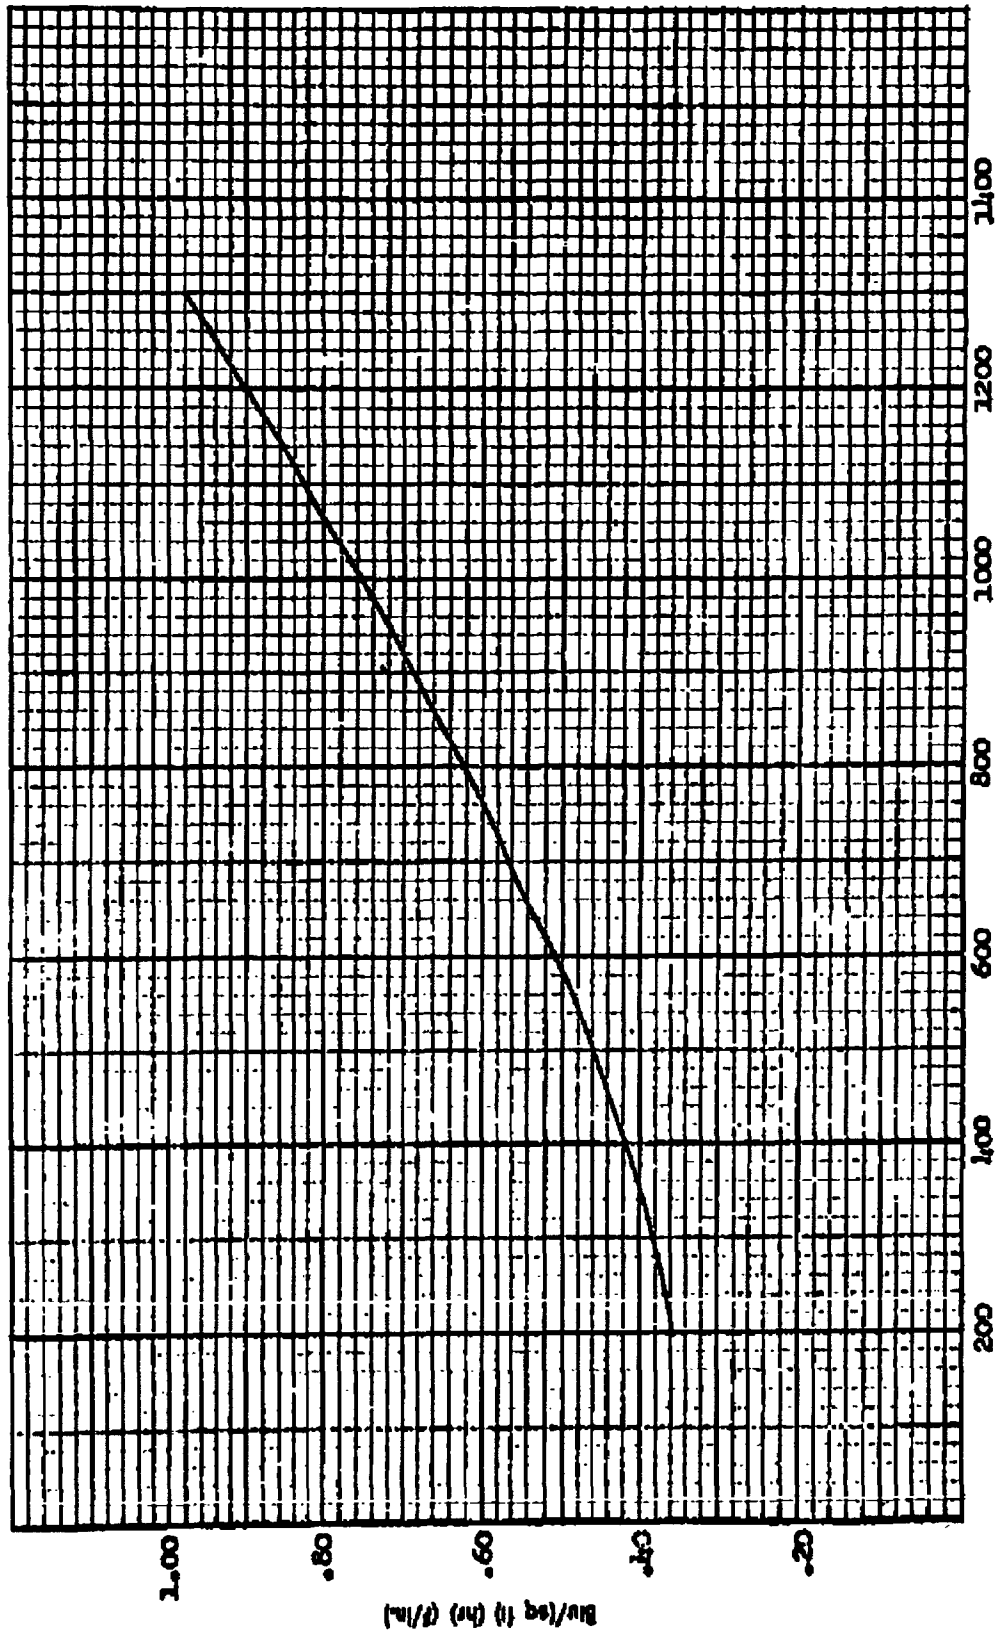

22-42x


mean temp deg F

231631



BALDWIN-EBERT-HILL, 500 Broadway Avenue, Trenton 2, New Jersey

HEAT LOSS: Btu per Hr. Sq. ft.

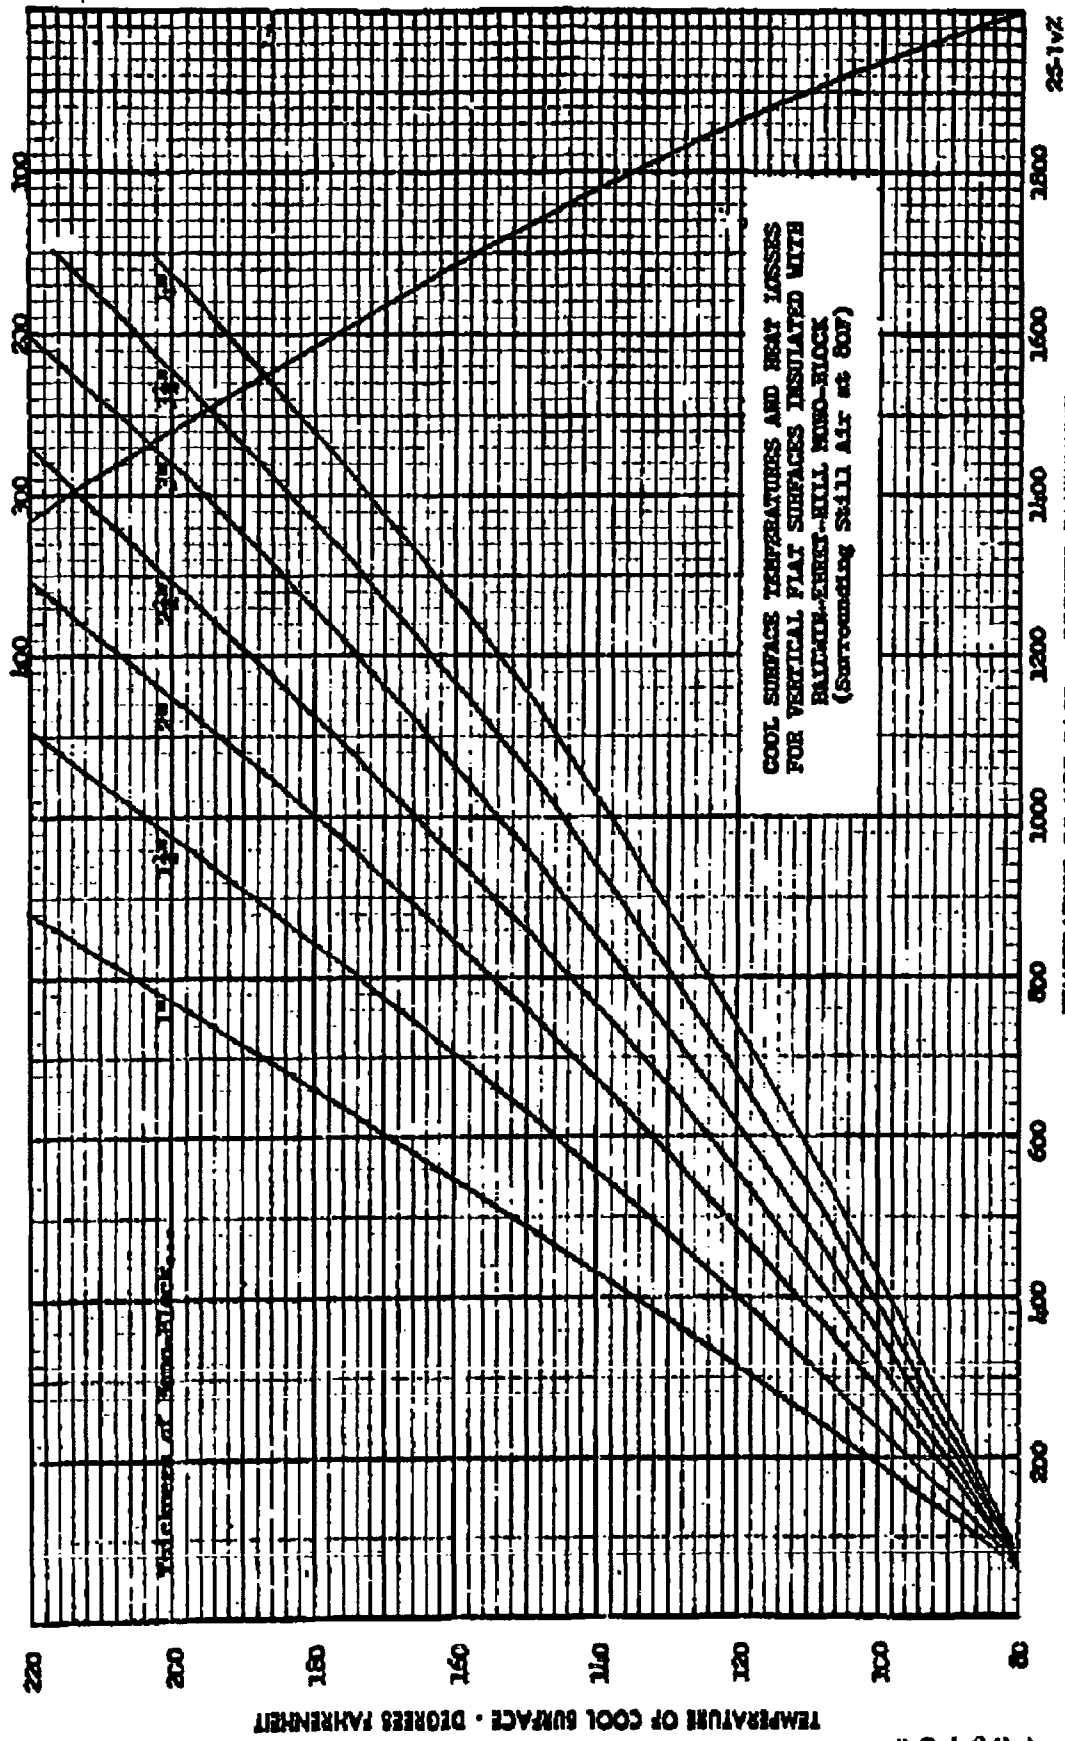

23132

Outside Surface Temperature - deg F

231633

