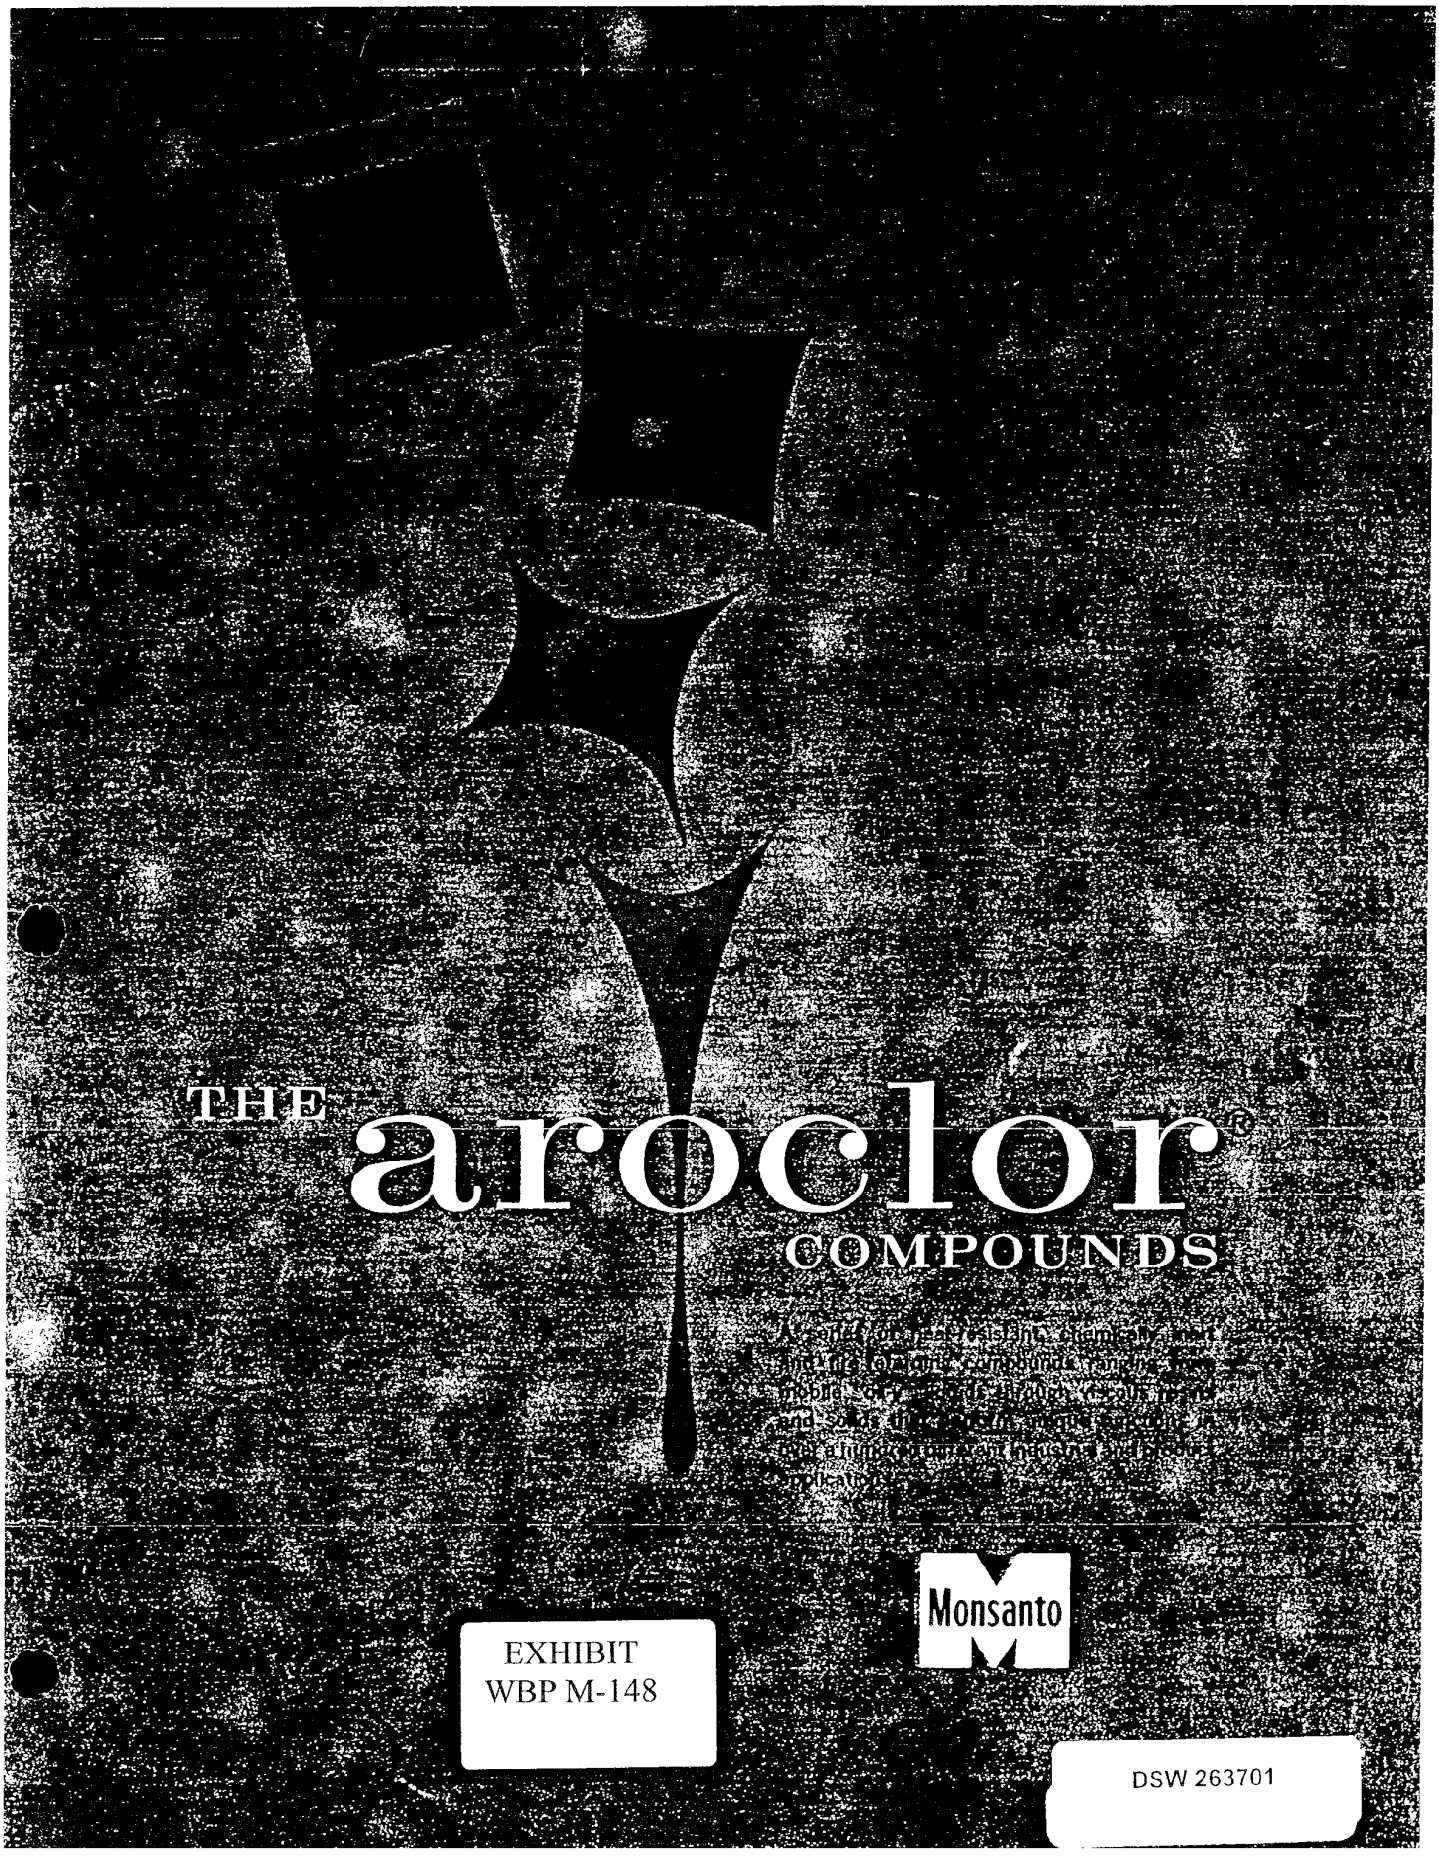

EXHIBIT
WBP M-148

DSW 263701



TOWOLDMON0003871
WATER_PCB-00000893

The Aroclor* compounds are among the most unique, most versatile chemically-made materials in industry. Aroclors are so useful in so many ways in so many different applications, primarily because of one outstanding characteristic: *inertness.*

The Aroclors do not burn . . . and they impart fire-retardance to compositions in which they are mixed. The Aroclors do not "break down" under mechanical stress; therefore, they make good lubricants, sealants, and expansion media. The Aroclors are not decomposed by, nor do they conduct even tiny amounts of, electricity; therefore, they are outstanding dielectrics. Heat has little effect on the compounds, hence the Aroclors are excellent heat transfer fluids. Since they are compatible with a wide range of synthetic resins, Aroclors make excellent plasticizers. Because Aroclors in formulations "trap" and hold more volatile ingredients, they make volatile insecticides and repellents "last longer" in residual activity.

And, important too, Aroclors are low in cost. Examination of their properties will show literally scores of uses in which no other material can serve.

The following pages describe the physical properties of the Aroclors and some of their many applications. These remarkable materials are manufactured exclusively by Monsanto.

*Aroclor is a trademark of Monsanto Chemical Company for its chlorinated aromatic hydrocarbons and their derivatives, including chlorinated diphenyl. Reg. U. S. Pat. Off. In this brochure, Aroclor is frequently used as a plural noun solely to improve the ease of reading and as a convenience to the reader. In every instance of such use, however, the usage refers to Monsanto Aroclor brand of polyphenyl compounds.

TOWOLDMON0003872
WATER_PCB-00000894

Page No.

Table of General Physical Properties..... 2

Electrical Applications of the Aroclors..... 8

Mechanical Applications of the Aroclors.....12
- Heat Transfer.....12
- Expansion Media.....15
- Liquid Sealant for Furnace Roofs.....15

Aroclors in Special Product Formulations.....16
- Sealers for Gaskets.....16
- Dedusting Agent.....16
- Insecticides.....16
- Precision Casting Waxes.....17
- Abrasives.....17
- Specialized Lubricants.....17
- Industrial Cutting Oils.....19
- Adhesives.....19
- Polishing Waxes and Impregnating Compounds.....21
- Coatings.....22
- Inks.....22
- Mastics, Sealing and Caulking Compounds.....23
- Permanent Tack Coatings.....23

Aroclors in Plastics.....24

Aroclors in Paint, Varnish, and Lacquers.....27

Appendix.....35
- Method for Emulsifying.....35
- Solubility Table.....36
- Vapor Pressures.....37
- Vaporization Rates.....38
- Corrosion Resistance of Materials.....39
- Viscosity Table.....40
- Table of Densities.....41
- Dermatology and Toxicity.....42

TOWOLDMON0003873
WATER_PCB-00000895



THE aroclors...

Aroclor compounds are a series of chlorinated biphenyls and chlorinated polyphenyls. They range in form and appearance from mobile oily liquids to fine white crystals and hard transparent resins. Aroclors are non-oxidizing, permanently thermoplastic, of low volatility, and non-corrosive to metals. Aroclors are not hydrolyzed by water, alkalis, or acids. The viscous liquids and resins will not support combustion when heated alone, and they impart fire retardance to other materials.

The crystalline Aroclors are relatively insoluble, but the liquid and resinous compounds are soluble in most of the common organic solvents, thinners and oils. All Aroclors are insoluble in water, glycerine or the glycols. Aroclor 5460 is insoluble in the lower molecular weight alcohols; "4465" is only partly soluble in the lower alcohols.

The following table describes the properties of twelve Aroclors, each of which is representative of a series. For almost every Aroclor shown, there is a dark-colored grade of approximately the same physical and chemical characteristics. These darker products are less pure but are lower in price.

Aroclors are used alone for particular physical jobs, such as insulating, heat transfer, sealants and expansion media; and they are used as components or extenders in elastomers, adhesives, paints, lacquers, varnishes, pigments and waxes. The properties imparted by Aroclors (and their usefulness in particular applications) vary in regular gradient over the series. Selection of the right Aroclor for a particular use can generally be made by comparision of the properties, by "blending" two or more, and by adjusting the percentage used in the particular mixture in which the Aroclors will be formulated.

DSW 263705

TOWOLDMON0003874
WATER_PCB-00000896

general physical properties of

	Aroclor 1221 Colorless mobile oil	Aroclor 1232 Practically colorless mobile oil	Aroclor 1242 Practically colorless mobile oil	Aroclor 1248 Colorless to light yellow-green, clear, mobile oil	Aroclor 1254 Light yellow viscous oil
Form					
Color	100 Max. (APHA)	100 Max. (APHA)	100 Max. (APHA)	100 Max. (APHA)	100 Max. (APHA)
Acidity—Maximum (Mgm. KOH per Gm.)	0.014	0.014	0.010	0.010	0.010
Average Coefficient of Expansion..cc/cc/°C	0.00071 (15°-40°C)	0.00073 (25°-100°C)	0.00068 (25°-65°C)	0.00070 (25°-65°C)	0.00066 (25°-65°C)
Typical Density Specific Gravity Pounds per Gallon—25°C (77°F)	1.182-1.192 (25°/15.5°C) 9.85	1.270-1.280 (25°/15.5°C) 10.55	1.381-1.392 (25°/15.5°C) 11.50	1.405-1.415 (65°/15.5°C) 12.04	1.495-1.505 (65°/15.5°C) 12.82
Distillation Range—ASTM D-20 (Mod.) Corr. °C	275°-320°	290°-325°	325°-366°	340°-375°	365°-390°
Evaporation Loss—%—ASTM D-6 Mod. 163°C.....5 hrs. 100°C.....6 hrs.	— 1.0 to 1.5	— 1.0 to 1.5	3.0 to 3.6 0.0 to 0.4	3.0 to 4.0 0.0 to 0.3	1.1 to 1.3 0.0 to 0.2
Flash Point—Cleveland Open Cup.....°C °F	141°-150° 286°-302°	152°-154° 305°-310°	176°-180° 348°-356°	193°-196° 379°-384°	None
Fire Point—Cleveland Open Cup.....°C °F	176° 349°	238° 460°	None* 	None 	None
Pour Point—ASTM D-97.....°C °F	Crystals at 1°C Crystals at 34°F	−35.5° −32°	−19° 2°	−7° 19.4°	10° 50°
Softening Point—ASTM E-28.....°C °F	— —	— —	— —	— —	— —
Refractive Index—D-line—20°C	1.617-1.618	1.620-1.622	1.627-1.629	1.630-1.631	1.639-1.641
Viscosity—Saybolt Universal Sec. (ASTM—D-88) 210°F (98.9°C)	30-31	31-32	34-35	36-37	44-48
130°F (54.4°C)	35-37	39-41	49-56	73-80	260-340
100°F (37.8°C)	38-41	44-51	82-92	185-240	1800-2500

*NONE indicates—"No fire point up to boiling temperature"

DSW 263706

TOWOLDMON0003875
WATER_PCB-00000897

some of the aroclor compounds

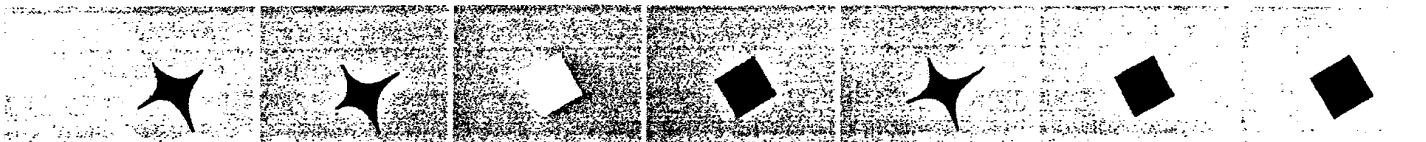

Aroclor 1260 Light yellow soft sticky resin	Aroclor 1262 Light yellow sticky clear resin	Aroclor 1268 White to off-white powder	Aroclor 4465 Light-yellow, clear, brittle resin	Aroclor 5442 Yellow trans-parent sticky resin	Aroclor 5460 Clear, yellow-to-amber, brittle resin	Aroclor 2565 Black, opaque, brittle resin
150 Max. (APHA)	150 Max. (APHA)	1.5 Max. NPA (molten)	2 Max. NPA (molten)	2 Max. NPA (molten)	2 Max. NPA (molten)	—
0.014	0.014	0.05	0.05	0.05	0.05	1.4
0.00067 (20°–100°C)	0.00064 (25°–65°C)	0.00067 (20°–100°C)	0.00061 (25°–65°C)	0.00123 (25°–99°C)	0.00179 (25°–124°C)	0.00066 (25°–65°C)
1.555–1.566 (90°/15.5°C) 13.50	1.572–1.583 (90°/15.5°C) 13.72	1.804–1.811 (25°/25°C) 15.09	1.670 (25°/25°C) 13.91	1.470 (25°/25°C) 12.24	1.670 (25°/25°C) 13.91	1.734 (25°/25°C) 14.44
385°–420°	395°–425°	435°–450°	230°–320° at 4 mm. Hg.	215°–300° at 4 mm. Hg.	280°–335° at 5 mm. Hg.	—
0.5 to 0.8 0.0 to 0.1	0.5 to 0.6 0.0 to 0.1	0.1 to 0.2 0.0 to 0.06	0.2 to 0.3 0.0 to 0.02	0.2 0.01	0.03 1.5 to 1.7 (at 260°—5 hrs.)	0.2 to 0.3 —
None	None	None	None	247° 477°	None	None
None	None	None	None	>350° >662°	None	None
31°	35°–38°	—	—	46°	—	—
88°	99°	—	—	115°	—	—
—	—	150° to 170° (hold pt.)	60° to 66°	46° to 52°	98° to 105.5°	66° to 72°
—	—	302° to 338° (hold pt.)	140° to 151°	115° to 126°	208° to 222°	149° to 162°
1.647–1.649	1.6501–1.6517	—	1.664–1.667	—	1.660–1.665	—
72–78	86–100	—	90–150 (266°F or 130°C)	300–400	—	—
3200–4500	600–850 (160°F or 71°C)	—	—	—	—	—
—	—	—	—	—	—	—

DSW 263707

TOWOLDMON0003876
WATER_PCB-00000898

PROPERTIES THAT "MAKE JOBS" FOR THE aroclors



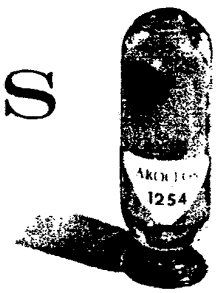



"NON-DRYING"

Aroclors are non-drying. Even when exposed to air in the form of thin films, no noticeable oxidation or hardening takes place. However, when used as components of paints, varnishes or lacquers, they do not retard the rate of drying of the films. Quick drying varnishes and paints can be made using Aroclors in the formulation.

"NON-FLAMMABILITY"

The viscous, oil-like Aroclors and the resins do not support combustion when heated alone, even at their boiling points — temperatures in excess of 350°C. Most of the Aroclors flux readily with other resinous and pitch-like materials to make mixtures that gain in fire retardance properties. Even when incorporated in nitro-cellulose films and rubber foams, Aroclors will retard the rate of burning.

"ADHESIVENESS" AND "THERMOPLASTICITY"

The Aroclor resins adhere strongly to smooth surfaces such as glass, metal, varnished or lacquered coatings.

The Aroclors are permanently thermoplastic. They apparently undergo no condensation or hardening upon repeated melting and cooling. Clear Aroclor resins can be supplied with softening points up to 105°C. Opaque, crystalline Aroclors can be supplied with initial melting points up to approximately 290°F.

DSW 263708

TOWOLDMON0003877
WATER_PCB-00000899

STABILITY

Toward Alkalies — The Aroclors are remarkably resistant to the action of either hydrolyzing agents or high temperature. They are not affected by boiling with sodium hydroxide solution.

Toward Acids — Experiments were made to determine whether hydrogen chloride is evolved during the treatment of Aroclors with sulfuric acid. Aroclor 1254 (selected as typical) was stirred with an equal volume of ten per cent sulfuric acid for a period of 150 hours. Any gases escaping from the reaction flask had to pass through a trap filled with silver nitrate solution, which solution would give a precipitate of silver chloride if any HCl came in contact with it. After 150 hours of treatment, neither the trap solution nor the acid layer in the treating flask showed any hydrogen chloride present.

Even prolonged treatment (255 hours) with concentrated sulfuric acid indicated negligible effect.

Toward Heat — Because of their stability to heat, the Aroclors are useful heat transfer media. Aroclor 1254 and particularly the less viscous Aroclor 1248 are recommended for this purpose because they may be heated at temperatures up to 315°C (600°F) in a closed system for long periods without appreciable decomposition and they are, at the same time, fire resistant.

Toward Oxidation — When Aroclors are subject to a bomb test at 140°C with 250 pounds oxygen per square inch, there is no evidence of oxidation as judged by development of acidity or formation of sludge.

ELECTRICAL RESISTIVITY

The Aroclors have extremely interesting electrical characteristics: high resistivity and dielectric strength and low power factor. The dielectric constant ranges from 3.4 to 5.0 at 100°C and 1000 cycles, depending upon the particular Aroclor.

SOLUBILITY

All Aroclors are insoluble in water. They are soluble, however, in most of the common solvents, plasticizers, and resins.

The Aroclor oils and resins are readily soluble in most of the common organic solvents and drying oils. The hard crystalline Aroclors are in general less soluble than the liquids or softer Aroclor resins. All the Aroclors are heavier than water, a valuable property for many applications.

TOWOLDMON0003878
WATER_PCB-00000900

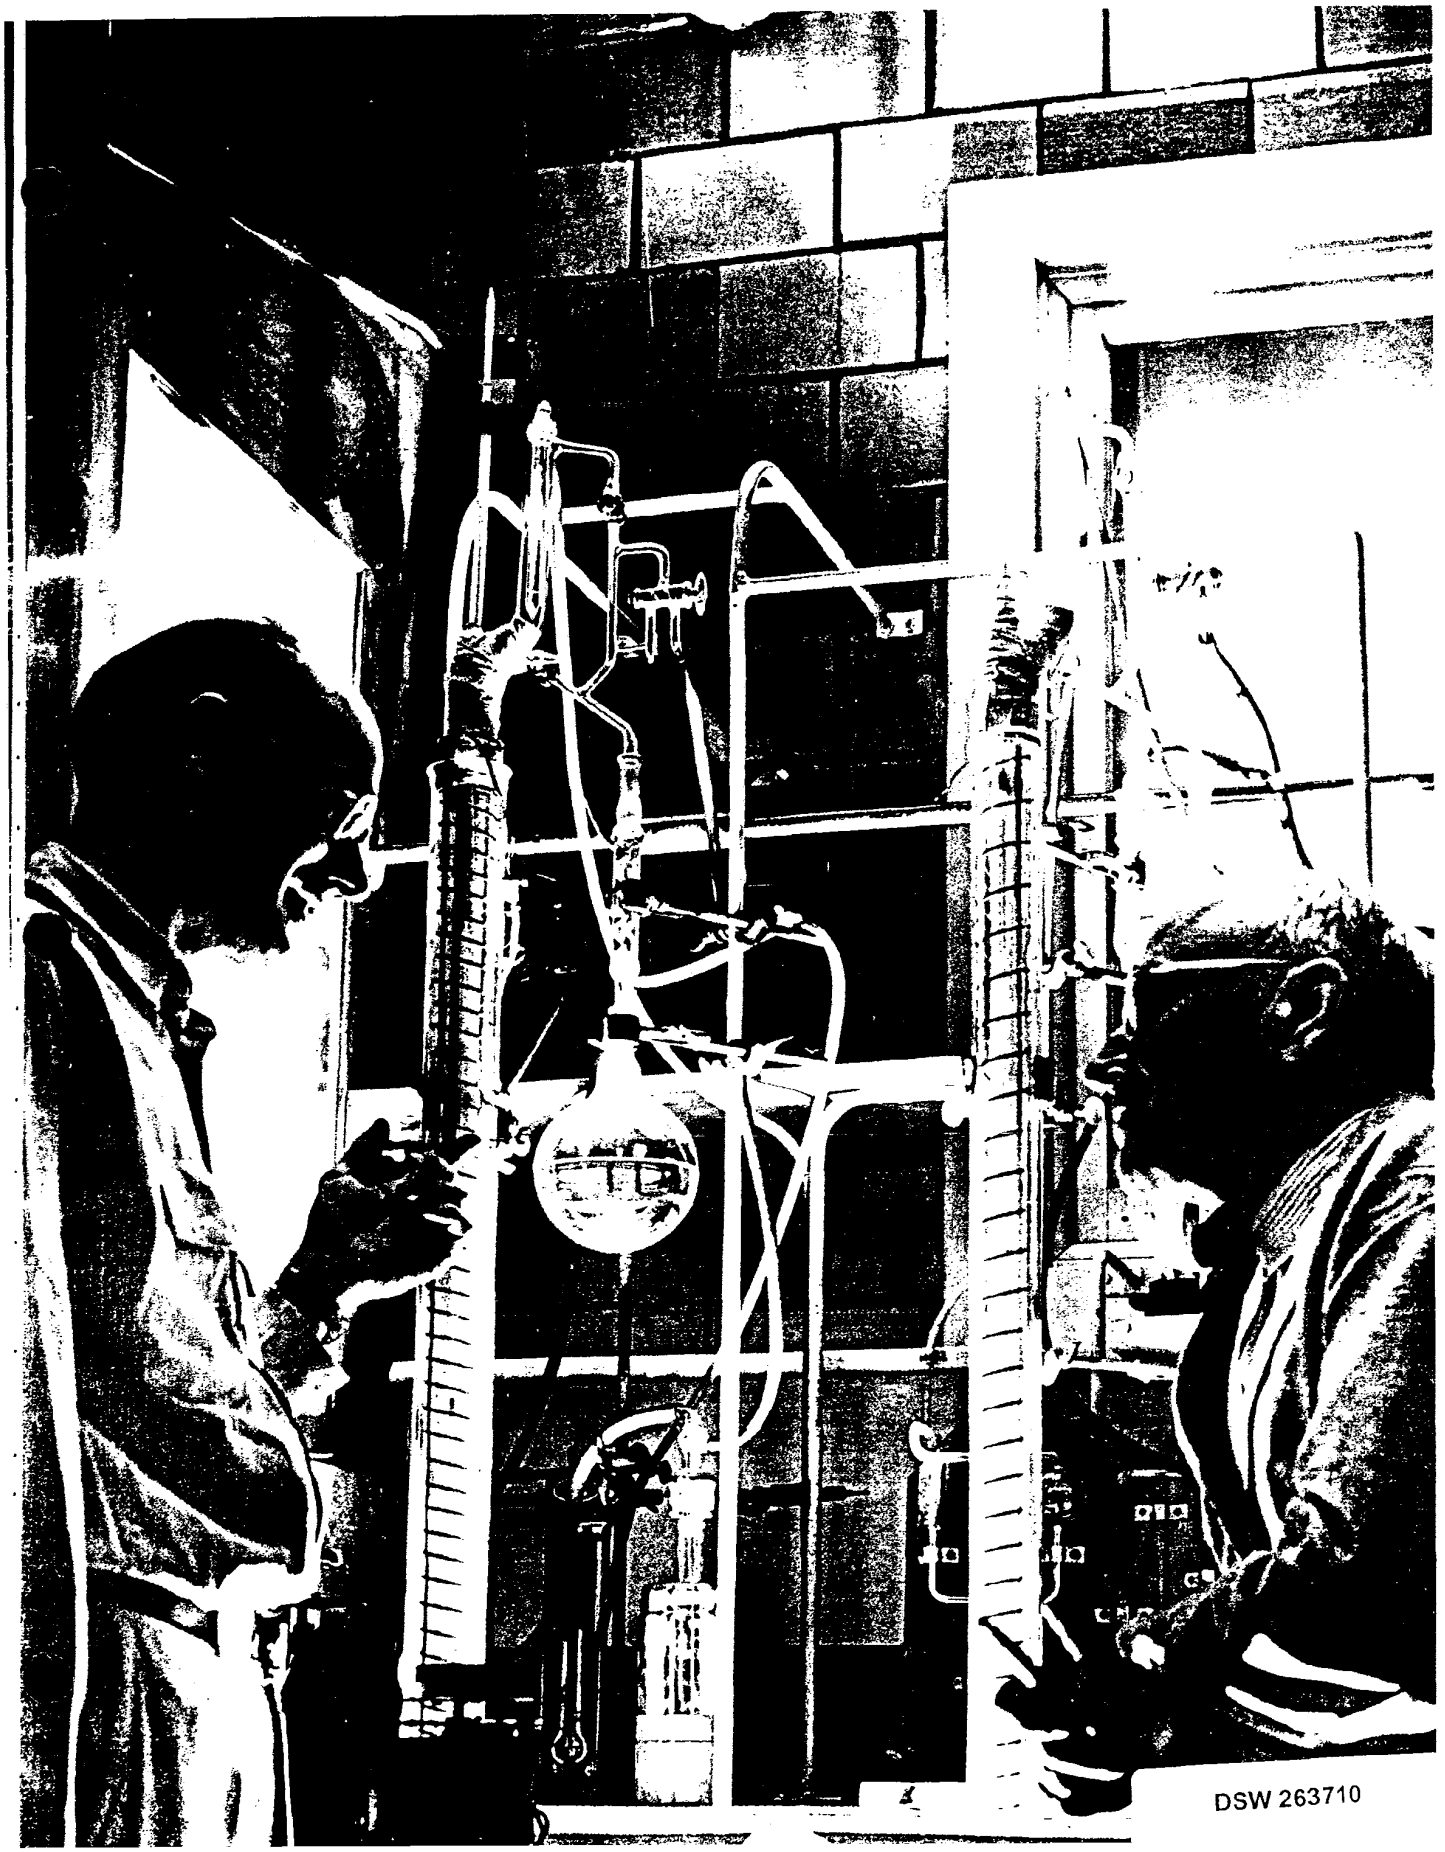

DSW 263710

industrial applications of the aroclors

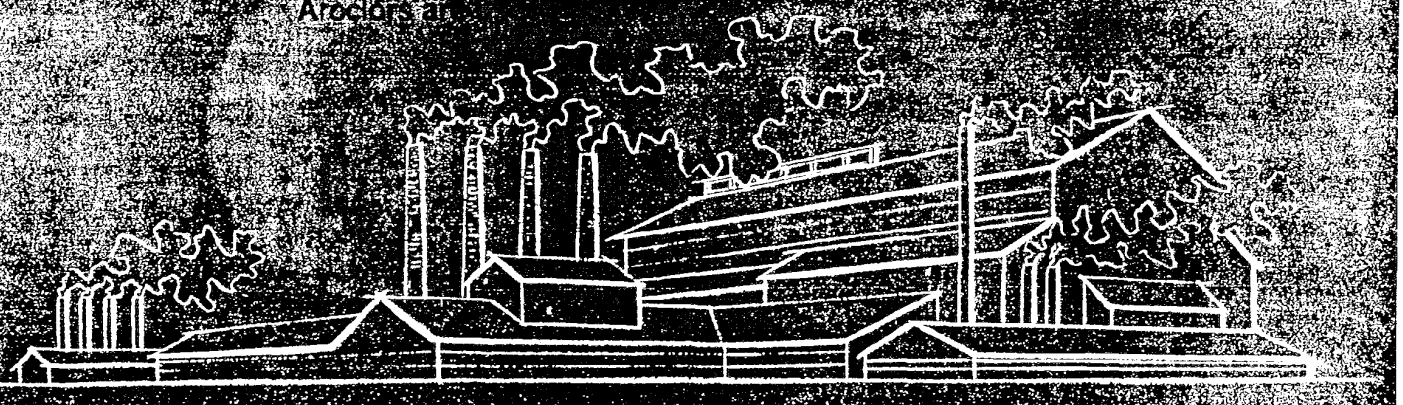

DSW 263711

TOWOLDMON0003880
WATER_PCB-00000902

Aroclors are among the purest commercial chemical compounds, virtually free of even traces of conducting impurities. For this reason, the Aroclors' dielectric properties closely approximate the theoretical maximum for the particular organic compound. With their stability, heat resistance and flame resistance — Aroclors can be used for a variety of heavy-duty dielectric applications.

electrical applications of aroclors

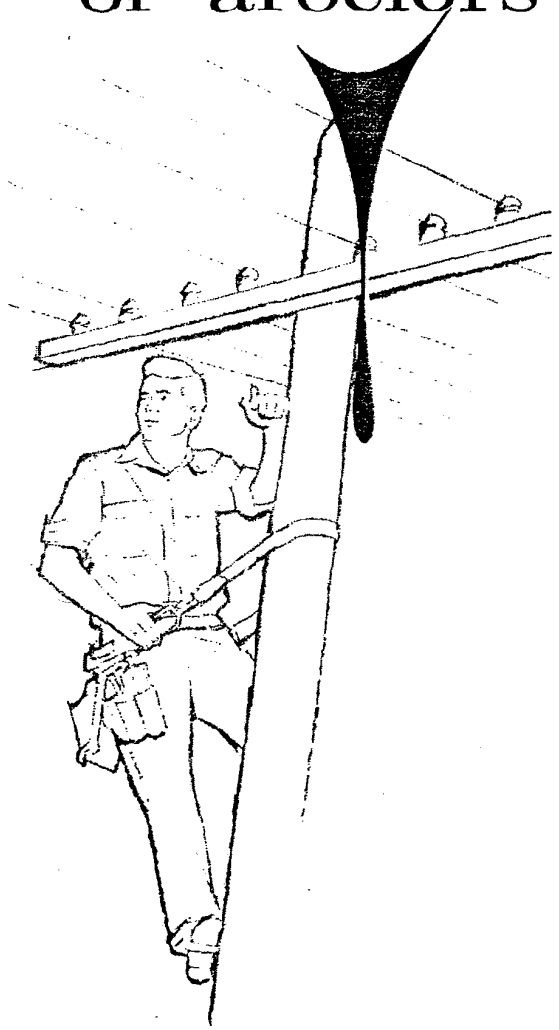

DIELECTRICS FOR ASKAREL TYPE TRANSFORMERS AND CAPACITORS

Monsanto Aroclors are used *per se* and are formulated for the liquid coolant-insulation fluids in transformers and capacitors. Such dielectrics must be highly pure with dependably minimal traces of electrolytes. They must be chemically stable and non-corrosive to a wide variety of structural materials. Most important, the dielectric fluid must be fire-resistant.

Aroclors are the only liquids in low cost commercial supply that meet these exacting requirements.

Liquid Aroclors "1242," "1248," "1254," and "1260" are used directly, or these are carefully formulated with chlorinated benzene and other additives to make askarel fluid for particular needs. Typical formulated askarel fluids are shown on the following pages.

Aroclors "1242" and "1254" themselves or in special formulations are used as the dielectric in fixed paper capacitors, for the power factor correction in utility transmission lines; for home appliances such as air conditioners, furnaces, washers and driers; for electric motors; and for ballast in fluo-

DSW 263712

TOWOLDMON0003881
WATER_PCB-00000903

rescent fixtures. There are also a number of applications in DC systems, in condensers, and the new energy storage capacitors.

The Aroclor fluids can be used in a wide variety of applications requiring a specialized dielectric. Monsanto works closely with electrical equipment makers to develop the proper dielectric with the exact physical properties required by the engineering of the equipment.

IMPREGNATING COMPOUNDS

Because of their nonflammability, high resistivity, and dielectric strength and low power factor, the liquid and resinous Aroclors are extremely useful materials for many applications as impregnating compounds. An important application of Aroclors in the electrical field is the use of Aroclors 1260, 4465 and 5460 in wire or cable coatings and as impregnants for cotton and asbestos braided insulation. Because they possess high purity and excellent electrical resistance, Aroclor 1254, 5460 and 1268 make excellent dielectric sealants: to close the pores of carbon resistors, and to seal electrical bushings and terminals.

Since the liquid Aroclors will absorb sufficient moisture from the atmosphere to impair the electrical characteristics, it is customary to treat Aroclor intended for this application before use with a dehydrating clay. An effective product for this purpose is Attapulgus clay 80/300 mesh dried for 4 hours at 400°C. and used at the rate of 0.10% based on the weight of Aroclor, followed by filtration. Treatment is improved if the Aroclor is heated to 50-55°C.

ELECTRICAL PROPERTIES

Aroclor	Dielectric Constant at 1,000 Cycles (1) 25°C	100°C	Volume Resistivity (2) Ohm-cm at 100°C, 500 Volts D.C.	Dielectric Strength (3)	Power Factor (4) 100°C, 1,000 Cycles
1232	5.7	4.6			
1242	5.8	4.9	Above 500x10⁹	Greater than 35KV	<0.1%
1248	5.6	4.6	Above 500x10⁹	Greater than 35KV	<0.1%
1254	5.0	4.3	Above 500x10⁹	Greater than 35KV	<0.1%
1260	4.3	3.7	Above 500x10⁹	Greater than 35KV	<0.1%
1268	2.5	—			
5442	3.0	4.9	Above 500x10⁹		
5454	2.7	4.2			
5460	2.5	3.7			
4465	2.7	3.3			

(1) ASTM D-150-47T
(2) ASTM D-257-46
(3) ASTM D-149-44
(4) ASTM D-150-47T

DSW 263713

TOWOLDMON0003882
WATER_PCB-00000904

TYPICAL TRANSFORMER ASKAREL

(MIXTURE OF AROCLOR AND CHLOROBENZENES)

Property	*Typical*
Visc. @ 37.8°C. (ASTM D88)	41-45 Sec. Saybolt Univ.
Spec. Gravity @ 15.5/15.5°C., (ASTM D287)	1.563-1.571
Color, APHA	150 max.
Condition	Clear
Acidity, mg. KOH/g.	0.01 max.
Pour Pt., °C., (ASTM D97)	−44°C., or lower
Inorganic Chlorides, ppm	0.10 max.
Refractive Index @ 25°C.	1.6075-1.6085
Distillation Range (ASTM D20)	
Corrected for stem and barometric pressure	
First Drop	210°C. min.
35%	260-280°C.
55%	290-330°C.
65%	305-340°C.
95%	395-415°C.
Corrosion	After heating with aluminum for 6 hrs. @ 200-220°C. the aluminum must not be corroded as shown by visual or weight inspection.
	The askarel used meets the following specifications:
Color, APHA	200 max.
Acidity, mg. KOH/g.	0.01 max.
Inorg. Chlorides, ppm	5 max.
Condition	Clear
Water Content, ppm.	30 max.
Resistivity, 100°C., 500v., 0.1″ gap	150 x 10⁶ ohm-cm. min.
Dielectric Strength, 25°C.	30 KV. min.
Dielectric Constant, 100°C., 1000 cycles*	3.8-4.0
Tin Tetraphenyl*	0.125 ± 0.001% by weight
Burn Point, (ASTM D92)*	None up to Boiling Point
Fixed Chlorine*	60.5%
Arc Formed Gases* (Oxygen Free Liquid @ 25°C.)	Total combustible gases including carbon monoxide, hydrogen and volatile hydrocarbons.
Electrical Stability*	After heating for 96 hours @ 100°C in a closed container, the resistivity should not decrease more than 10%.

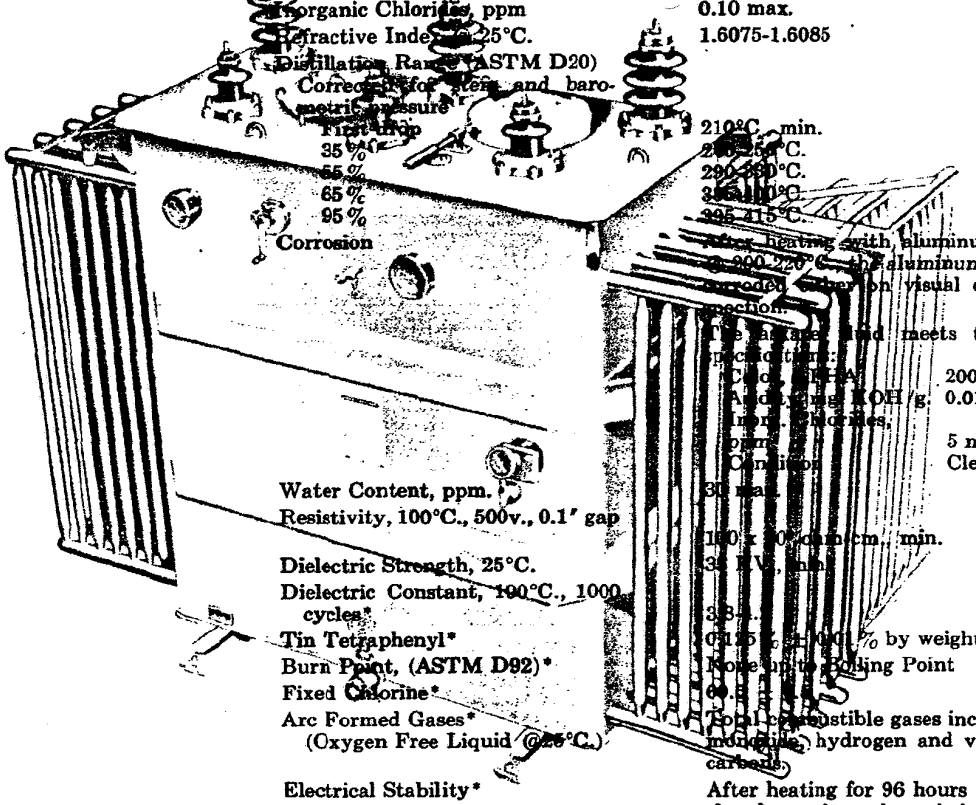

TYPICAL CAPACITOR AROCLOR

Property	*Typical*
Visc. @ 37.8°C. (ASTM D88)	82-92 seconds Saybolt Univ.
Specific Gravity @ 25/15.5°C (ASTM D287)	1.381-1.392
Color, APHA	50 max.
Condition	Clear
Acidity, mg. KOH/g.	0.01 max.

*Determined by special request.

DSW 263714

TOWOLDMON0003883
WATER_PCB-00000905

Typical Capacitor Aroclor (continued)

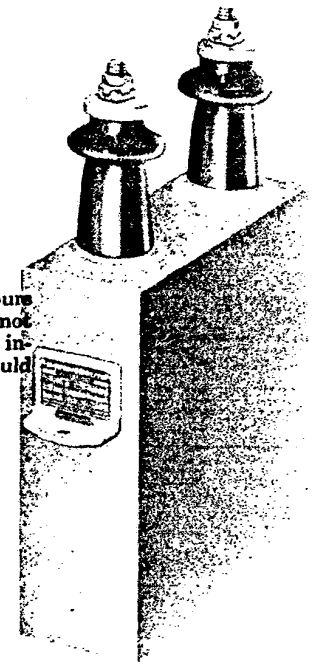

Property	*Typical*
Pour Pt., °C. (ASTM D97)	−14 or lower
Inorganic Chlorides, ppm.	0.10 max.
Refractive Index @ 25°C.	1.6240-1.6260
Distillation Range (ASTM D20) Corrected for stem and barometric pressure	10% 325°C. min. 90% 360°C. max.
Corrosion	After heating with aluminum for six hours at 210°C ± 10°C the aluminum must not be corroded either on visual or weight inspection and the Aroclor 1242 should meet the following specs.: Color, APHA 60 max. Acidity, mg. KOH/g. 0.01 max. Inorg. Chlorides, ppm 0.10 max. Condition Clear
Water Content, ppm	35 max.
Resistivity 100°C. 500 volts DC @ 0.1″ gap	500 x 10^9 ohm-cm., min.
Dielectric Constant 100°C. @ 1000 cycles (ASTM D924)	4.7-4.9
Flash Point Cleve. Open Cup*	170°C., min.
Fire Point °C.*	None to boiling point
Sulfates (ASTM-D117-31)*	None
Fixed chlorine content (Carius)*	41.5-42.5%
Specific Heat @ 25°C.*	0.29
Evaporation @ 100°C for 6 hrs.*	0.4% max.
Dielectric Strength (KV) (ASTM D877)*	35 Min.

*Determined by special request.

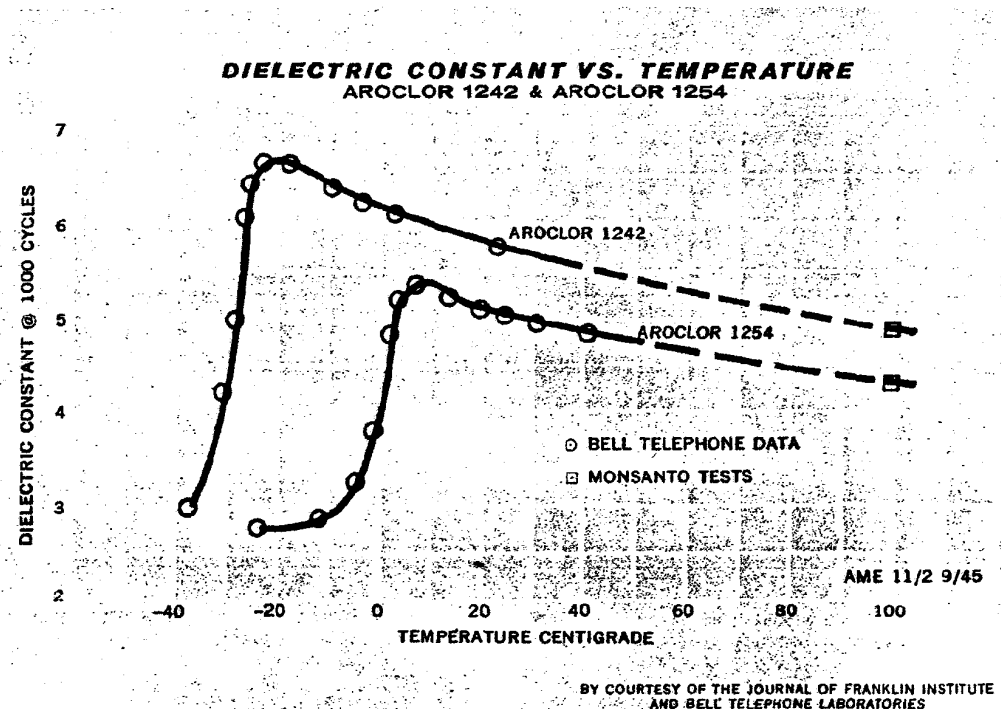

DSW 263715

TOWOLDMON0003884
WATER_PCB-00000906

Because Aroclors have excellent shear resistance, heat stability, and are chemically stable . . . they can serve in dozens of mechanical applications for transferring mechanical power, heat, and variable pressures. Aroclors do not attack metals even at high temperature; they resist oxidation, chemical and mechanical breakdown under a wide variety of environmental conditions. In addition, the Aroclor liquids used as lubricants impart a high degree of extreme pressure lubricity.

mechanical applications of aroclors

HEAT TRANSFER

Aroclors are outstanding for use as the heat transfer liquids in indirect heating systems. Aroclor systems can transfer closely controllable, uniform heat to chemical processing vessels, food cookers, potato chip fryers, drying ovens and other installations where the fire source must be removed from the point where the processing heat is used. Aroclor 1248 is used most frequently in such indirect heating systems.

Heat transfer with Aroclors has many advantages. Processing heat up to 600°F. can be delivered in a *non-pressurized* system, reducing the construction costs of the heating system. The fluid in properly engineered systems will last without significant degradation for from five to seven years. The systems present no fire or explosion hazard, since the Aroclor does not support combustion. In addition, there is no day to day conditioning of boiler water, inasmuch as the Aroclor requires no conditioning, and Aroclor systems require a minimum amount of insulation. Aroclor systems operating at atmospheric pressure have been used successfully since 1941. Aroclor systems can operate safely and efficiently on gas, oil or electricity.

Photo courtesy of
Petro-Chem Development Division
Yuba Consolidated Industries, Inc.

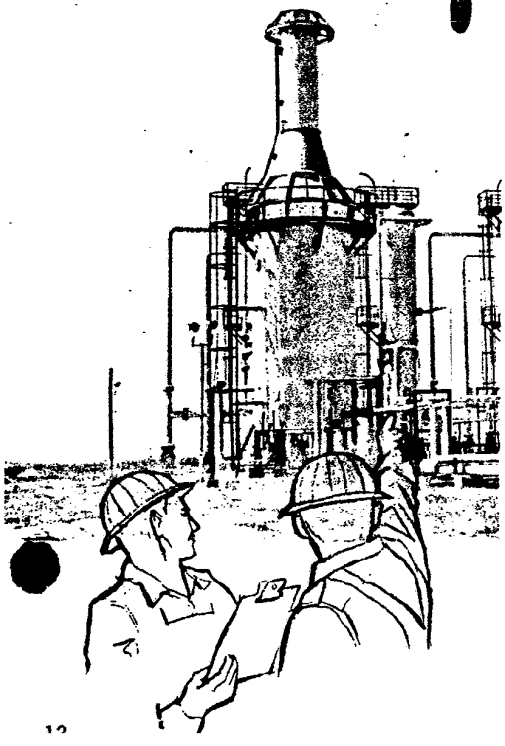

DSW 263716

TOWOLDMON0003885
WATER_PCB-00000907

Aroclors 1242, 1248 and 1254 are used as a circulating heat transfer medium with great success. Good circulation and a well designed heating system are necessary to prevent local overheating. Aroclor 1248, however, is recommended for universal use up to 315°C (600°F) because of its fluidity at low temperatures and its fire-resistance. The liquid Aroclor 1248 is readily pumpable with centrifugal pumps to temperatures as low as 50°F.

In processes where a cooling cycle must also be introduced, provision can easily be made for shunting circulating Aroclor through a water cooled heat exchanger, thus employing one medium for both heating and cooling.

In special cases, Aroclors 1242 and 1232 can be substituted for the Aroclor 1248. If low outside temperatures are encountered, the less viscous Aroclor 1242 can be used.

Aroclor 1232 may be used where outdoor temperatures as low as 20°F are encountered. While Aroclor 1232 is serviceable for unpressurized heat transfer, this Aroclor compound is not quite as fire resistant as "1248" or "1242."

Monsanto has available an "Engineering Heat Transfer Data" booklet that gives design guidance on Aroclor systems. In addition, Monsanto can suggest sources for Aroclor heaters and equipment.

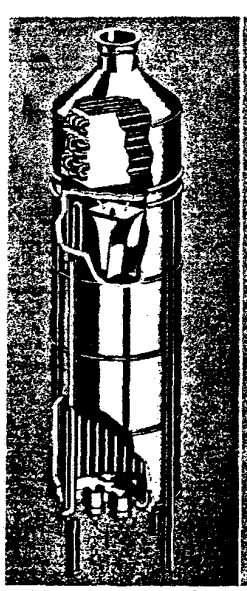

Photo courtesy of
n Precipitation Corp.

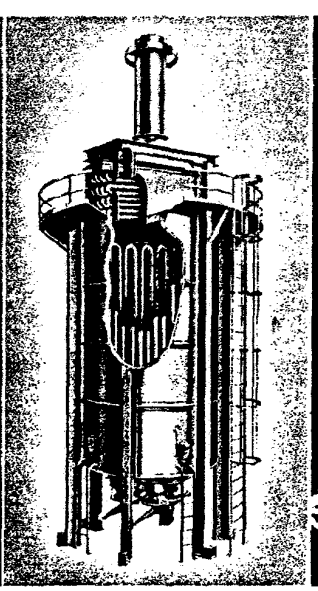

Photo courtesy of
Struthers Wells Corp.

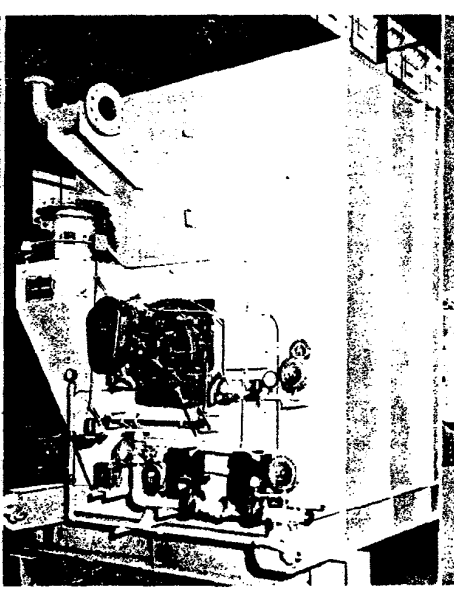

Photo courtesy of
Union Iron Works

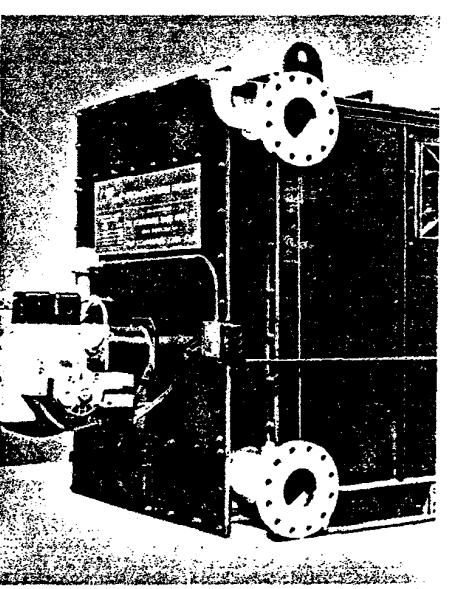

Photo courtesy of
The International Boiler Works Co.

DSW 263717

TOWOLDMON0003886
WATER_PCB-00000908

HEAT CAPACITY OF AROCLORS
AT VARIOUS TEMPERATURES

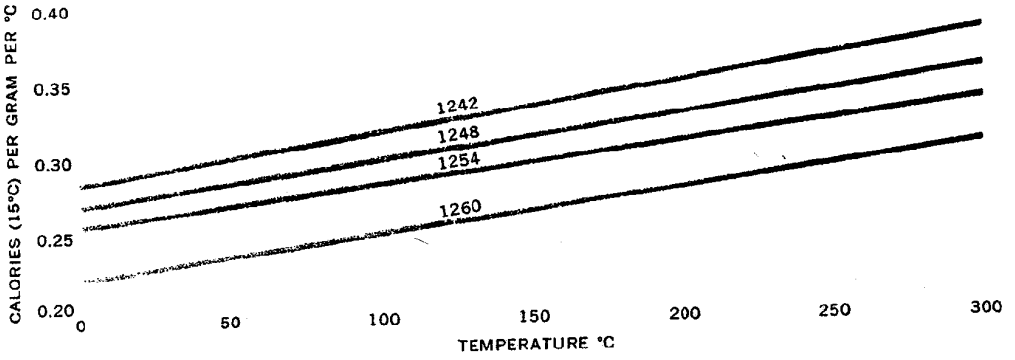

THERMAL CONDUCTIVITY OF AROCLOR 1248

Temperature °C.	Temperature °F.	BTU./Hr./Sq. Ft./°F./Ft.	Calories, gram/Sec./Sq.Cm./°C./Cm.
30	86	0.0570	236×10^{-4}
60	140	0.0564	233×10^{-4}
100	212	0.0555	229×10^{-4}



DSW 263718

TOWOLDMON0003887
WATER_PCB-00000909

EXPANSION MEDIUM

Because of their stability at high temperatures and ability to withstand frequent temperature cycles without gum formation, the liquid Aroclors are used as the actuating medium in bellows controls, thermostats, industrial temperature control regulators and other kinds of automation equipment.

The average coefficient of expansion of Aroclor 1248 per degree F. within the various temperature ranges indicated in the table below was determined by using the simple formula $Vt = Vt^1 [1 + a (t - t_1)]$. The coefficient, a, has been calculated at 100°F increments, as follows:

Temp. Range F	Average Coefficient of Expansion cc/cc/F
0 to 100	0.00037
100 to 200	0.00039
200 to 300	0.00040
300 to 400	0.00046
400 to 500	0.00048
500 to 600	0.00051

The specific volume of Aroclor 1248 at different temperatures is as follows:

Temp. °F.	Specific Volume ml/gm
0	0.674
100	0.699
200	0.726
300	0.755
400	0.790
500	0.828
600	0.870

LIQUID SEALANT FOR FURNACE ROOFS

The liquid Aroclors 1248 and 1254, because of their low vapor pressures and fire-resistance, make excellent liquid sealants. These non-evaporating fluids have good flow at slightly elevated temperatures and are chemically stable at elevated temperatures. Consequently, the liquid Aroclors make excellent fluid sealants for any application where the use of oil would create a fire hazard. In the trough of annealing furnaces, for example, Aroclors make dependable fire-safe roof seals.

VACUUM DIFFUSION PUMP OIL

The fluid Aroclors 1248 and 1254 are highly stable to air; they make good oils for vacuum pumps at a much lower cost than high priced silicone type oils. These Aroclors operate efficiently in vacuum diffusion pumps used to pull high vacuum for metalizing plastics; dehydrating foods, medicinals; and for drying capacitor cones.

DUST ENTRAPMENT

Because Aroclors are non-drying and tacky, they make excellent coatings for capturing dust, lint and other fine air-borne particles. Aroclors 1260 and 5460 are used successfully to coat fibrous glass air filter pads, metal mesh and other materials used for filtering air and gas streams.

TOWOLDMON0003888
WATER_PCB-00000910

With their wide range of physical properties, their inertness, lubricity, and vapor-suppressing characteristics — Aroclors can be valuable ingredients in an extraordinary variety of formulated products. They are compatible with a variety of solvents, oils, resins. They are virtually non-volatile and permanently thermoplastic; they will not react with other chemicals in the formulation. In addition, their low cost makes their use for special purposes eminently practical and economical.

aroclors in special product formulations

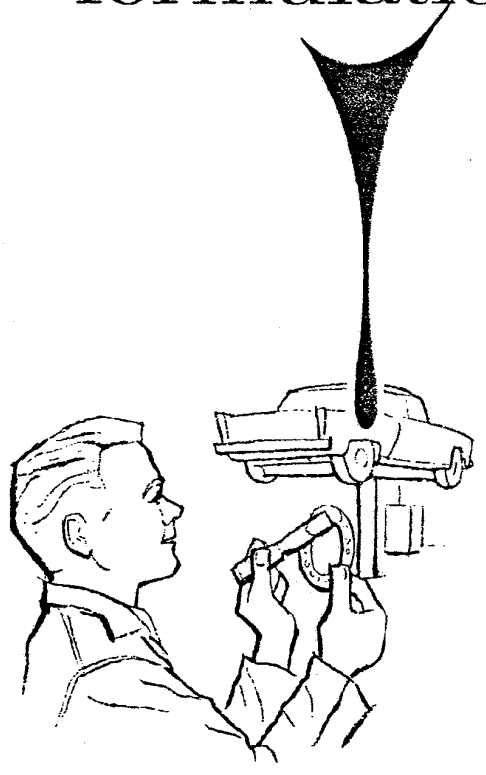

SEALERS FOR GASKETS

Aroclors — particularly when hot — swell rubbers like Hycar, Koroseal, PerBuna N, and Neoprene. Wherever seals and gaskets of natural or synthetic rubber tend to shrink under heat and use, Aroclors 1232, 1242 or 1254 can be used as a swelling agent to tighten the shrunken seal. An example is in automotive transmission oil: a small amount of Aroclor in the oil swells the seal *in place*, saving the cost of tearing down the equipment to replace the seal or gasket. Aroclors can be used in gasket sealing compounds to swell the rubber after the gasket or seal is in place.

DEDUSTING AGENT

Aroclor 1254 is a low cost dedusting agent which can "hold down" the dusting of a variety of chemical products. Because Aroclor 1254 resists both combustion and oxidation, it can be used to control dusting of highly reactive compounds. As a typical example,* a few tenths of one percent will control the dusting of calcium hypochlorite.

*Covered by U. S. Patent No. 2,921,911, issued January 19, 1960, and assigned to Pennsalt Chemicals Corp.

DSW 263720

TOWOLDMON0003889
WATER_PCB-00000911

Aroclor 5460 and 1254 act as vapor suppressants. The United States Department of Agriculture scientists reported that the inclusion of from 5 to 25 parts per hundred by weight of Aroclor increased the effective kill-life of a lindane spray up to ten times. A painted or metallic surface sprayed with certain chlorinated insecticides fortified with Aroclor will remain toxic to flies, ants, roaches, silverfish up to 2 to 3 months. The Aroclor resins suppress the rapid evaporation of the volatile insecticides without adding odor or other objectionable residue. Formulation into insecticides is quite simple; the Aroclor is dissolved in a suitable solvent compatible with the insecticide formulation, and mixed in. The most pronounced effect for increasing the kill-life of the insecticide is obtained with lindane, chlordane and BHC. Aroclors are recommended for chlorinated insecticide formulations to be used for non-crop spraying. Their low cost makes this use a most practical way to lower the ultimate cost of insect control.

Aroclors are compatible with various natural waxes, such as carnauba and others, including those used to formulate casting wax. Aroclors help impart to the finished casting wax a number of desirable properties: hardness without brittleness; resistance to shrinking; sharp definition; sharp melting point; and fire-resistance. Waxes formulated with Aroclors are non-tacky and highly stable. Aroclor-containing waxes are widely used in making dental castings, in the precision casting of aircraft parts, and for casting costume jewelry. Aroclors 1254, 4465 and 5460 are the ones most frequently used, the proportions dependent upon the properties required in the finished wax. Much of the highest quality precision casting wax used in the "lost wax" process is formulated with Aroclors.

Aroclors 1254, 1268 and 5460 are used in the manufacture of specialized abrasives. Because of their excellent bonding characteristics, high thermal stability and resistance to oxidation and corrosion — Aroclors are used as the carriers for abrasive materials. A major use is as part of the bonding agent in specialized grinding wheels.

For specialized lubricants requiring good extreme pressure (EP) characteristics, the liquid Aroclors make excellent additives. The Aroclors impart high temperature stability, excellent lubricating qualities, and weather and corrosion resistance. As an example, Aroclors are used to formulate grease and pipe thread compounds for use in oxygen systems. Greases formulated with Aroclors have a high chemical resistance, are suitable for use in contact with corrosive chemicals. Gear oil lubricants containing Aroclors have good resistance to sheer degradation and high

TOWOLDMON0003890
WATER_PCB-00000912

temperature stability. Added in small amounts to railroad car journal box oils, Aroclors impart better extreme pressure lubricity and reduce the incidence of "hot boxes."

The heat-resisting, nonflammable characteristics of the Aroclors make them attractive in themselves as lubricants under conditions of high temperature. As an example: in governor systems of central power stations, Aroclor 1248 is well suited to this lubricating application.

Straight Aroclor 1254 gives excellent results on a roller bearing test operating at 255-260°F with much less carbonization or decomposition than the usual spindle oil under the same conditions.

As an extreme pressure (EP) lubricant base added to a petroleum hydrocarbon oil in amounts up to approximately 15% by weight, Aroclors 1248 and 1254 materially increase the load-carrying properties without reducing the viscosity of the resulting composition. These two Aroclors represent one of the more satisfactory carriers for the element chlorine as an extreme pressure base, possessing the following advantages:

1. **STABILITY** . . . even at higher temperatures, which assures there will be neither separation of components nor appreciable change in physical or chemical properties during long periods of operation.
2. **NON-VOLATILE.** Many other types of chlorine bearing compounds are so volatile as to render them unfit for long periods of service. The Aroclors are non-volatile at normal temperatures.
3. **NON-OXIDIZING.** Aroclors do not oxidize nor "thicken up" to an objectionable degree.
4. **NON-CORROSIVE** . . . toward metal surfaces.
5. **NON-ABRASIVE.** Aroclors exerts no abrasion on the machined surfaces.
6. **NON-HYDROLYSIS.** Aroclors do not hydrolyze in the presence of water, thus avoiding the generation of hydrochloric acid.
7. **COMPATIBILITY.** Aroclors are completely miscible with mineral oils.
8. **COLOR.** Aroclors do not darken or change the color of lubricating oil.

Submerged Lubrication

Under conditions of lubrication subjected to exposure to water displacement such, for example, as lubrication of bridge rollers, a heavier-than-water lubricant can be prepared from mixtures of Aroclor and oil, of which the following are typical examples:

Mix No.	% by weight Oil*	Aroclor 1248	Pour Pt.	Gravity at 15.5°C.	Approx. Pounds Gal.
1	50	50	0°F	1.1263	9.4
2	25	75	+5°F	1.2703	10.6

Viscosity 210°F-160 Saybolt Secs.
Color ASTM 7-8
Flash Point 545°F.
Pour Point 15°F.

*Bright Stock: Gravity API 22-23

DSW 263722

TOWOLDMON0003891
WATER_PCB-00000913

Aroclors in Industrial Cutting Oils

Aroclor 1254 is used to formulate the finest quality "straight" and "soluble" or emulsifiable-type cutting oils. The Aroclor functions as an excellent extreme-pressure lubricant and it is far superior to aliphatic chlorinated hydrocarbons because of its higher order of thermal stability. The heat resistance is most important in cutting oils for machining high grade steel. With Aroclor cutting oils there is a lower degree of hydrolysis which minimizes the staining of the metal.

AROCLORS IN ADHESIVES

Aroclors are outstandingly useful ingredients in the formulation of various types of adhesives. Besides a plasticizing action on the adhesive's resin base, they add valuable properties to the adhesive bond. Aroclors offer a variety of property improvements to adhesives based on polyvinyl acetate, to rubber cements and to hot melt adhesives.

Aroclors strongly resist attack by water, acids, alkalies and other common corrosive influences, as well as microorganism attack. By proper selection of materials, adhesives containing Aroclors can have outstanding resistance to most of the destructive factors that injure bonding properties.

Hot Melt Adhesives

A typical starting formulation for a cellulose acetate butyrate hot melt adhesive with Aroclor 5460 is:

	Parts by Weight
Half-second cellulose acetate butyrate	35.00
Aroclor 5460	30.00
Dioctyl phthalate	15.00
Newport V-40	19.89
Santonox*	0.1
Syn Fleur #6	0.01

The above coating can be applied at about 350°F. Ventilation should be provided.

A typical starting formulation for an ethyl cellulose hot melt adhesive with Aroclor 5460 is:

	Parts by weight
Ethyl cellulose, 50 cpr	24
Aroclor 5460	7
Lopor No. 45 Mineral Oil	57
Bakers No. 15 Castor Oil	5
Epoxy soybean oil	3
Paraffin wax (m. p. 135°F)	3
Santonox*	1

*Santonox: Monsanto Chem. Co. trademark. Registered U. S. Pat. Ofc.

DSW 263723

TOWOLDMON0003892
WATER_PCB-00000914

Heat Sealing Adhesives

Chlorinated rubber and Aroclors 1254 and 1260 make excellent heat sealing and label adhesives. These adhesives have high chemical resistance and extremely low moisture vapor transmission. A typical starting formulation is:

	Parts by weight
Parlon (125 centipoise type)*	20
Aroclor 1254	6
Aroclor 5460	6
Toluene	68

PVAc Emulsion Adhesives

Aroclors 1221, 1232, and 1242 impart excellent tack and strong bonding power to polyvinyl acetate emulsion adhesives. They readily blend with simple stirring and since they are liquid at room temperature no pre-melting is required. The hardness required in the adhesive's end use can be varied to suit simply by selection of the Aroclor without materially changing other properties. The Aroclors are compatible with PVAc emulsions at a level of up to 11 parts of Aroclor in 100 parts of PVAc emulsion.

An excellent type of hot melt book binding adhesive can be made as follows:

	Parts by weight		
	Formula 17	Formula 18	Formula 19
Gelva polyvinyl acetate resin V-7	100	65	—
Ethyl cellulose	—	15	—
Gelva C-SV-16R	—	—	100
Santicizer 160	—	16	—
Rosin WW	75	—	75
Dibutyl phthalate	30	—	30
Aroclor 1254	55	4	55

By changing the type of polyvinyl acetate resin utilized in the hot melt, the viscosity of the melt can be increased or decreased without changing the ratio of resin to plasticizer.

Polyurethane Resin Adhesives

An excellent flocking adhesive containing Aroclor 1254 can be made as follows:

		Parts by weight
Part A —	Multranil FLD*	100
	Aroclor 1254	20
	Mondur *C	5
Part B —	Multranil FLD*	100
	Mondur C*	5-10

Part A is applied to the fabric by knife coating and allowed to dry thoroughly. The fabric is then coated with Part B, and the material is flocked immediately.

*Mobay Chemical Co. trademark. Registered U. S. Pat. Otc.

DSW 263724

TOWOLDMON0003893
WATER_PCB-00000915

Epoxy Adhesives

Aroclors can be used to extend epoxy resin adhesives. The extending greatly reduces the formulation cost with a minimum effect on the bonding characteristics of the adhesive.

Aroclors can be used to extend or substitute Carnauba Wax and reduce the cost of the wax formulation. Several practical formulas are available using Aroclors to make wax blends that possess the qualities of Carnauba Wax. These blends can be used for automobile, wood, leather and linoleum polishes.

Selected Aroclors such as 5460 used in conjunction with various waxes make excellent impregnating compounds for furniture drawers, etc., to prevent sticking.

Resinous Aroclors used in combination with waxes make excellent and inexpensive sealers for concrete and masonry surfaces, wood, fiber board and paper products.

The Aroclors may be used to impregnate cloth, paper, wood or asbestos in order to impart moisture and gas resistance, adhesion, insulating properties, alkali or other chemical resistance, flame resistance, or lubricating qualities. For this type of formulation they are used in combinations with other materials such as waxes, inorganic pigments, asphalt, tars, aluminum stearate, sulphur, etc., in order to obtain exactly the physical characteristics desired for the specific purpose. Aroclors 1254, 4465 and 5460, or the corresponding dark-colored products, are suggested as most applicable.

Wood impregnated by vacuum-pressure method with the following mixture:

Aroclor 4465	70%
Microcrystalline Wax	20%
Sulfur	10%

. . . is definitely tougher, harder and more moisture resistant than untreated wood. This coating is very resistant to acids and alkalies but will be attacked by aromatic, aliphatic or chlorinated hydrocarbons. The surface is not appreciably discolored and can be painted. Various degrees of hardness and adhesion can be obtained by varying the Aroclor: wax: sulfur ratio.

TOWOLDMON0003894
WATER_PCB-00000916

For use as moisture proof coatings on wood, paper, concrete and brick, the Aroclors are best combined with waxes, especially paraffin or Carnauba, oils such as mineral oil or drying oils, and synthetic resins including modified alkyds, phenolics, chlorinated rubber, polystyrene, styrene-butadiene co-polymers, ethyl cellulose, cellulose acetobutyrate, benzyl cellulose or vinyl resins. Selection of materials for use in combination with Aroclors depends on end use requirements of the specific application.

The simplest compositions contain only Aroclor and paraffin. A moisture proofing compound composed of 96% (by weight) of Aroclor 5460 and 4% paraffin (melting point 54°C) has an ASTM softening point of about 82°C and is very efficient. Substituting Aroclor 4465 for Aroclor 5460 produces a compound with a softening point of about 58°C.

Softening point and viscosity when melted may be further decreased by using mixtures of Aroclors. For example, a composition containing 40% of Aroclor 1260, 56% of Aroclor 5460 and 4% of paraffin will be very soft at ordinary temperatures. Increased proportions of paraffin will also produce softer compounds.

An excellent melt coating for paper and cloth was reported by W. M. Gearheart and F. M. Ball, OFFICIAL DIGEST, Vol. 343, 1953:

Half-second Butyrate	50%
Dioctyl phthalate	9.9%
Aroclor 1260	40%
Ionol	0.1%

This coating may be applied by knife or roller at 350°F; the application requires no solvent. This coating on paper or fabric has extremely good flexibility.

Aroclor 4465 is a useful resin for compounding rotogravure and other printing inks. A mimeograph ink suitable for use on bond paper contains the following ingredients:

Aroclor 4465	40%
Lubricating Oil (SUV 1200 @ 100°F)	35%
Paraffin Oil (SUV 76 @ 100°F)	20%
Carbon Black	4%
Oil Soluble Dye	1%

Aroclor 4465 may also be used in the preparation of imitation gold leaf. A thin coating of the Aroclor is applied hot to one side of paper. While it is still hot, bronze powder is spread upon the coating. The bronze powder adheres to the Aroclor completely covering the paper. This product is used in making the "gold

TOWOLDMON0003895
WATER_PCB-00000917

leaf" letters on books, etc. The paper treated with Aroclor and bronze powder is placed upon the book binding. A hot die is pressed upon it. The Aroclor softens and sticks the bronze to the binding and forms a coating over it to protect it from tarnishing.

The Aroclors are also used as vehicles for carrying the pigments used in glass decoration. When the decorations have been applied and the glass is fired, the Aroclors volatilize without carbonization and thus avoid discoloration of the glass. Aroclors 1254 and 4465 are used for ceramic decoration.

PAPER TRANSPARENTIZER

A treating liquid that makes paper transparent for use as tracing paper, window envelopes, and special packaging can be formulated with Aroclor 5460 and polybutenes. A typical economical formulation is:

Aroclor 5460	30%
Indopol H-300	25%
Toluene	45%

In the paper treating formula, the proportions of Aroclor to Indopol may be varied from 2:1 to 1:2 respectively.

MASTICS, SEALING AND CAULKING COMPOUNDS

Aroclors and polybutenes can be blended with inorganic fillers to make excellent sealing and caulking compounds. A typical "filler" would be:

Whiting	50%
Talc	30%
Lithopone	10%
7 M Asbestos	10%

By combining selected Aroclors and Indopol polybutenes, it is possible to produce a wide range of hardness, viscosity, flow and bonding characteristics in durable sealing and caulking compounds.

Excellent mastics, too, can be prepared by blending selected Aroclor resins with Indopol polybutenes. The mastics have good adhesive qualitites for specialized uses such as sealing of automobile body construction.

PERMANENT TACK COATINGS

Aroclors and Indopol polybutenes can be blended in a variety of proportions to make permanently tacky coatings. These coatings may be applied to fabric or paper to provide a permanently "sticky" surface. Insecticides, for example, can be blended into such coatings to make insect traps or insect barriers on tree trunks for tree foliage or fruit protection. These coatings can also be used for tapes and sign backing.

TOWOLDMON0003896
WATER_PCB-00000918

Aroclors are valuable as low cost plasticizers for a variety of applications. Aroclors improve chemical resistance, flame retardance, oxidation resistance, and reduce the cost of plasticized elastomers. Depending upon the use, the various Aroclor compounds offer a number of benefits to the user.

aroclors in plastics

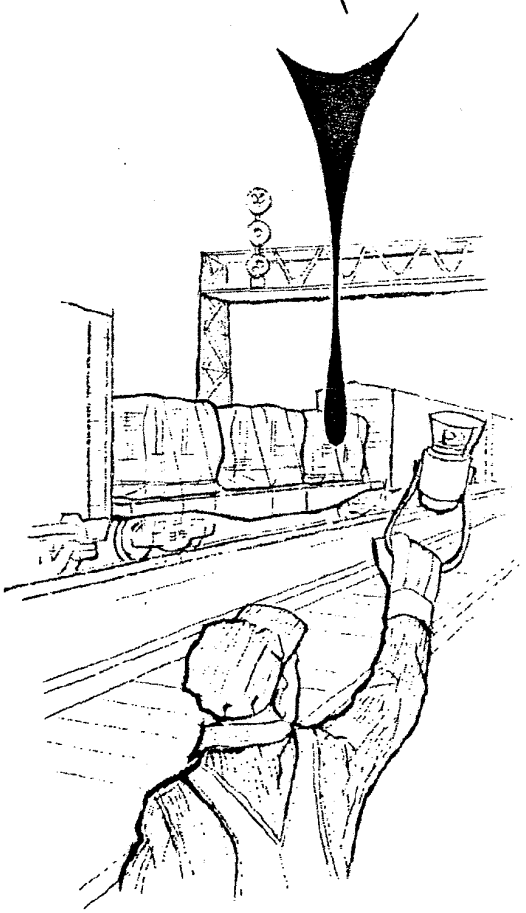

In almost all formulations, the use of a selected Aroclor as a plasticizer reduces the cost per pound of the formulation.

Another valuable use of Aroclors in the plastics field is as a grinding and dispersing medium for pigments.

The Aroclor compounds are compatible with most common plastic materials; they are compatible to the extent of practical use with the following:

Asphalt
Benzyl Cellulose
Carnauba Wax
Cellulose Acetate Butyrate
Chlorinated Rubber
Coumarone-Indene Resins
Dammar Resin
Ester Gum
Ethyl Cellulose
Epoxy Resins
Manila Gum
Nitrocellulose
Paraffin
Phenolic Resins
Polyethylene
Polyester Resins
Polystyrene Resins
Polyiso-Butylene
Polyurethanes
Polyvinyl Acetate
Polyvinyl Chloride and
Polyvinyl Butyral
Polyvinylidene Chloride
Rosin
Rubber
Styrene Butadiene Co-Polymers
Vinyl Resins

DSW 263728

TOWOLDMON0003897
WATER_PCB-00000919

Aroclors are not compatible with cellulose acetate or with phenolic resins in the final stage of condensation.

In selecting the proper Aroclor for a given use, the degree of *flexibility* imparted increases progressively in the order of: hard resinous Aroclor, soft resinous Aroclor, liquid Aroclor. Conversely, the *hardness* of the plasticized elastomer increases progressively with the choice of: liquid Aroclor, soft resinous Aroclor, hard Aroclor resin.

POLYVINYL CHLORIDE

The Aroclors are valuable as secondary plasticizers, or plasticizer-extenders for polyvinyl chloride formulations. The Aroclors impart greatly improved chemical resistance over conventionally ester-plasticized compositions. For example, a formulation plasticized with 3 parts of DOP and 1 part of Aroclor 1254 shows the best chemical resistance of any plasticized polyvinyl chloride formulation evaluated to date.

Aroclor 1262, when used as a co-plasticizer with DOP, greatly reduces the amount of migration of the plasticizer to nitrocellulose lacquers. Aroclor 5460 is frequently used as a plasticizer-resin-extender to make flameproof vinyl tiling compositions.

In vinyl chloride co-polymer resins for solution application, the combination of Aroclor 5460 and Aroclor 1254 is widely used because of its outstanding chemical resistance.

RUBBER—NATURAL AND SYNTHETIC

The liquid Aroclor compounds — 1221, 1232, 1242 and 1248 — have a strong plasticizing action on rubber, both natural and synthetic. Aroclors 1254 and 1260,

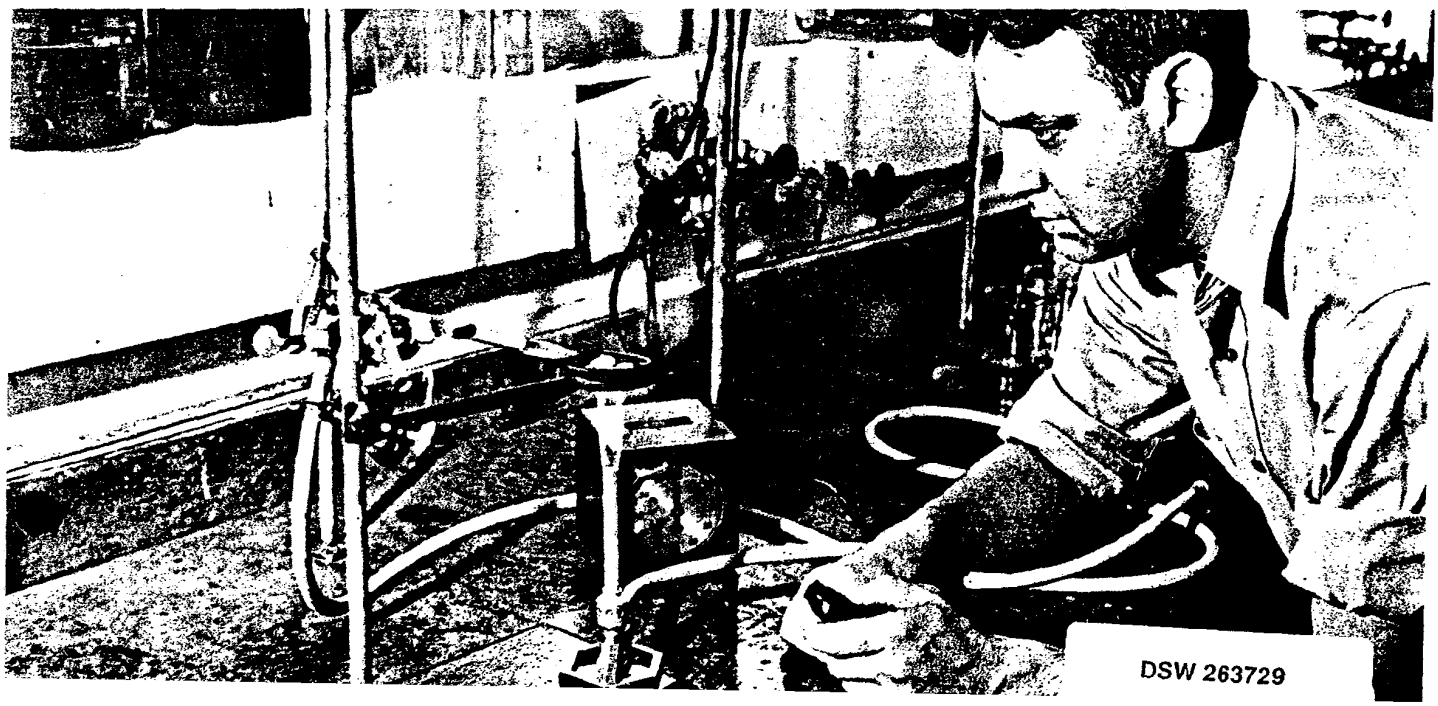

TOWOLDMON0003898
WATER_PCB-00000920

when milled into rubber, impart permanent tackiness and adhesion to the composition.

Aroclors 2565, 4465, 5460 and 1268, when incorporated in neoprene rubber in amounts as high as 40 parts per 100 parts of rubber make compositions that are extremely flame retardant.

The Aroclors generally show a high degree of compatibility with epoxy resins; this group of materials is one of the very few plasticizers that possess such high compatibility with these materials. The lower Aroclor numbers, 1221 and 1232, impart a high degree of flexibilizing to epoxy compounds. The more resinous and solid Aroclors have little effect on the flexibility of the compound; in fact, they tend to act as reinforcing materials. Aroclors have little effect on epoxy resins' hardness, tensile or compressive yield strength. The ultimate compressive strength can be improved by using solid Aroclors in phthalic anhydride cured systems.

All of the Aroclors, when used at a rate of 15 to 20 parts per hundred of resin, greatly retard the burning rate of epoxy compositions. If a small amount of antimony oxide is added in addition to the Aroclor compounds, the materials then become non-burning.

Aroclor 5460, when used in low density polyethylene to the extent of 20% — in combination with 10% antimony oxide — makes the compound self extinguishing. Compared to other materials that make polyethylene self extinguishing, Aroclor 5460 has much less effect on tensile, yield and elongation properties. In addition, the heat stability of the Aroclor compound is greatly superior to the other materials commonly used to make polyethylene self-extinguishing.

Incorporation of the solid, resinous Aroclors will make asphalt self extinguishing. Possible applications of this type of formulation include caulking compounds, roofing compounds and sound-deadening coatings. Normally, 30% of an Aroclor such as 5460 will make an asphalt mixture that is self extinguishing.

Incorporation of Aroclor in a polyester resin in combination with antimony oxide greatly reduces the burning rate of polyester resins. A mixture of sufficient amounts of selective Aroclors will produce polyesters that are self extinguishing.

Considerable interest has been displayed in the use of Aroclors in phenolic laminating resins, to make compounds that are flame resistant. Normally, the higher molecular weight Aroclor, such as Aroclors 1260, 1262 and 5460 are evaluated for this purpose.

TOWOLDMON0003899
WATER_PCB-00000921

Aroclors are soluble in paint and varnish oils and solvents and are compatible with most film-forming coating resins. The Aroclor compounds improve adhesion to the substrate. Adding Aroclors to paint, varnish or lacquer formulations imparts properties to the film that correspond to the particular character of the Aroclor used. The hard, resinous Aroclors tend to give increased hardness to films; the viscous Aroclors impart flexibility.

Aroclors are excellent grinding and dispersion media for pigments used in paints and varnishes. Aroclor 1254 is used to disperse aluminum powder in a paste form which can be incorporated easily into paints and varnishes. The Aroclor imparts excellent leafing qualities, brightness or luster and does not tarnish the aluminum pigment on aging. Moreoever, the coating composition does not support combustion.

aroclors in paint, varnish and lacquer formulations



VARNISHES AND ALKYDS

Aroclors 4465 and 5460 will produce paints that are very quick drying and yet have excellent durability. The weight of Aroclor used may be from 30% to 50% of the weight of the oils.

The Aroclors do not react chemically with oils, hence there is no advantage in heating together in making a varnish. They are best added as a "chill back" or as a cold cut in the thinning operation. As far as incorporation of the Aroclors is concerned, the only reason for heating is to make the Aroclors liquid so they can be more readily mixed with the oils.

Aroclor 1260 is best for short oil varnishes that are required at the same time to be flexible. The Aroclors impart water and alkali resistance, and with these qualities enhance the value of the other resins used in the varnish. The suggested starting formulation is two parts by weight of oil, one part of Aroclor 1260 and one part of other resin. These

TOWOLDMON0003900
WATER_PCB-00000922

proportions can be varied as required. The Aroclor may be considered to function in the formulation as an oil, with the difference that it does not oxidize and lose its flexibility.

Resins of the alkyd, phenolic or ester gum type, with a harder Aroclor such as 5460, may also be used in making varnish formulations.

EPOXY RESIN COATINGS

The high compatibility of Aroclor compounds with epoxy resins makes these materials of great value in formulating epoxy coatings. Normally, 10 to 15% of Aroclor 1260 or 1262 is added to the epoxy composition to improve flexibility with a minimum effect on the corrosion resistance and adhesive characteristics of the film.

NITROCELLULOSE COATINGS

In pyroxylin or nitrocellulose lacquers, the Aroclors can function both as plasticizers modifying the properties of the film and as film-forming bodying resins. Aroclors are highly compatible with nitrocellulose and with other resins and plasticizers commonly used in lacquer formulating. They impart weather resistance, luster, adhesion and decreased burning rate. The Aroclors' excellent electrical characteristics (high dielectric strength and resistivity and low power factor) and their property of retarding the passage of moisture and gases through nitrocellulose make the Aroclors of special value in coatings for electrical insulating materials.

To illustrate the modification possible to obtain by changes in formulation, three lacquer formulas are given below. All have excellent durability but the third is much softer and more flexible than the other two. Only the solids contents are given. The amounts tabulated are parts by weight.

Aroclor Lacquers

	No. 1	No. 2	No. 3
½ second Nitrocellulose (dry)	100	100	100
Dammar resin	80	—	—
Ester Gum	—	80	—
Aroclor 1260	20–39	20	80–70
Dibutyl Phthalate	20–0	20	—
Tricresyl Phosphate	—	—	39–70

No. 1 and No. 2 have excellent sanding and polishing qualities. No. 3 is very flexible but too soft for sanding.

Where extremely high flexibility is desired, as for example in lacquers for high tension automotive cables, the following composition is suggested:

15-20 second R. S. Nitrocellulose	100 parts by weight
Tricresyl Phosphate	120 parts by weight
Aroclor 1242	80 parts by weight

The accompanying trilinear diagrams show the practical compatibility limits of Aroclors 1254 and 1262 when used in combination with some other resins and plasticizers. Aroclor 1260 gives values almost the same as those shown for 1262. The less viscous Aroclors have greater compatibility; the more resinous Aroclors have less compatibility than the ones shown.

TOWOLDMON0003901
WATER_PCB-00000923

In the trilinear diagrams, the compositions, represented by any point in the unshaded areas, are those which produce homogeneous lacquer films. On the other hand compositions represented by points in the shaded areas produce impractical, segregated, brittle or soft films. For detailed information as to the derivation and use of these diagrams reference is made to the following articles:

Jenkins & Foster, "Compatibility Relationships of the Aroclors in Nitrocellulose Lacquers," Ind. Eng. Chem. 23, 1362 (1931).

Hofmann & Reid, "Graphical Methods in Lacquer Technology," Ind. Eng. Chem. 20, 431 (1928); "Formulation of Nitrocellulose Lacquers," Ind. Eng. Chem. 20, 687 (1928).

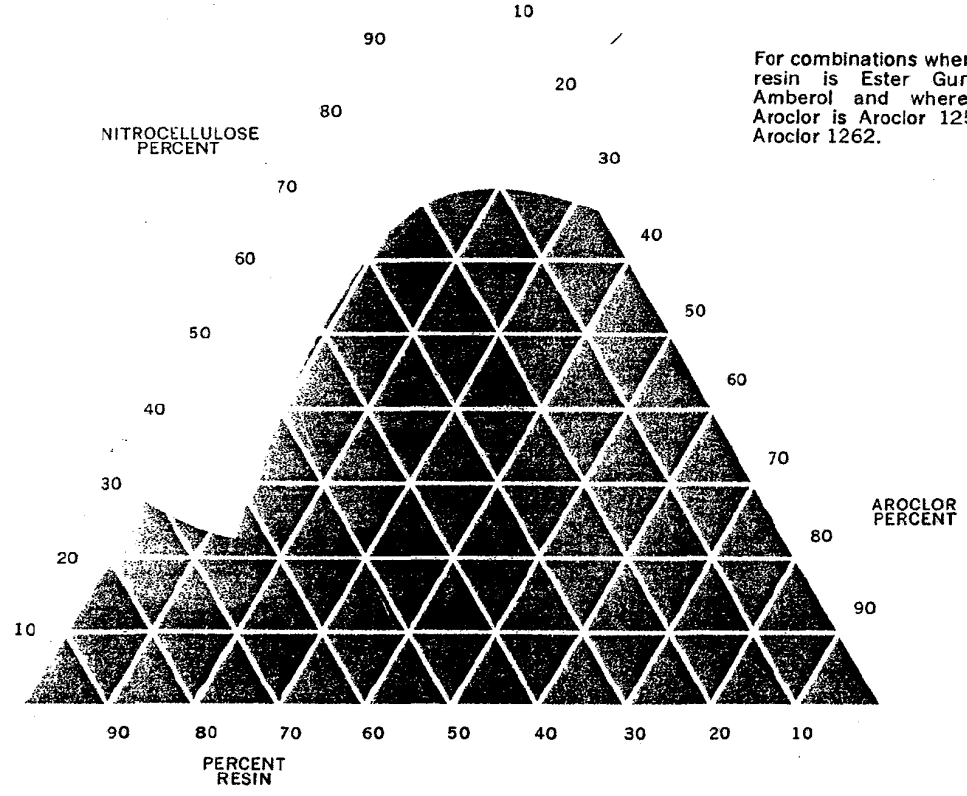

For combinations where the resin is Ester Gum or Amberol and where the Aroclor is Aroclor 1254 or Aroclor 1262.

DSW 263733

TOWOLDMON0003902
WATER_PCB-00000924

For combinations where the resin is of the phthalic anhydride-glucerol type and where the Aroclor is Aroclor 1262.*

*Aroclor 1260 may be substituted without material change.

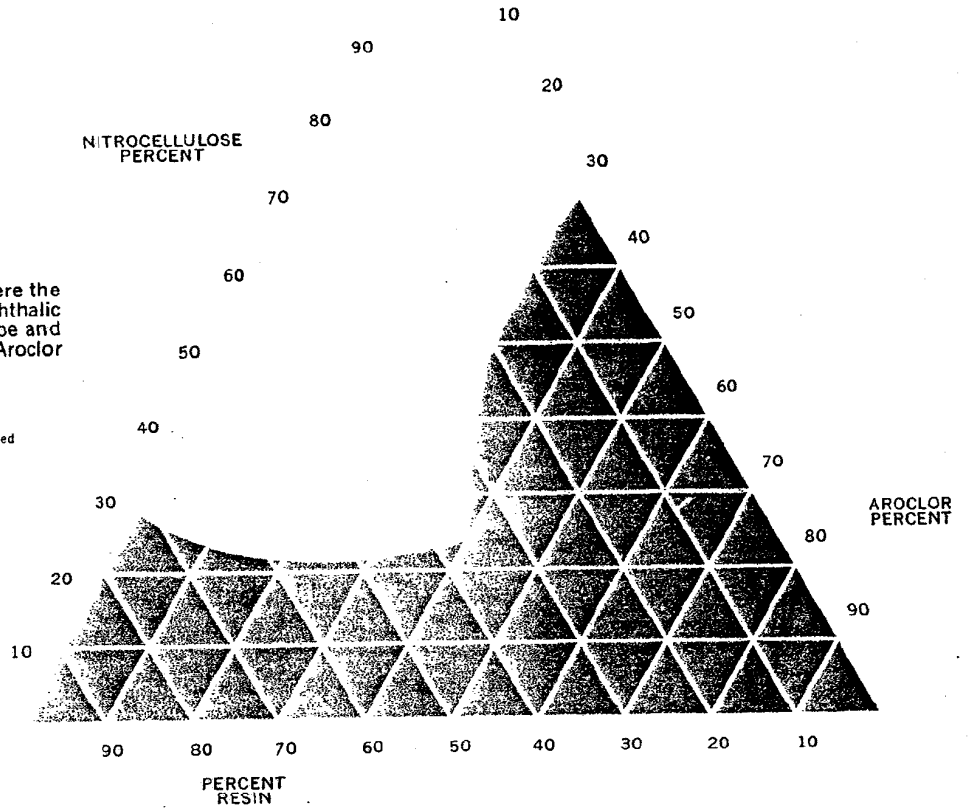

For combinations where the resin is of the phthalic anhydride-glycerol type and where the Aroclor is Aroclor 1254.

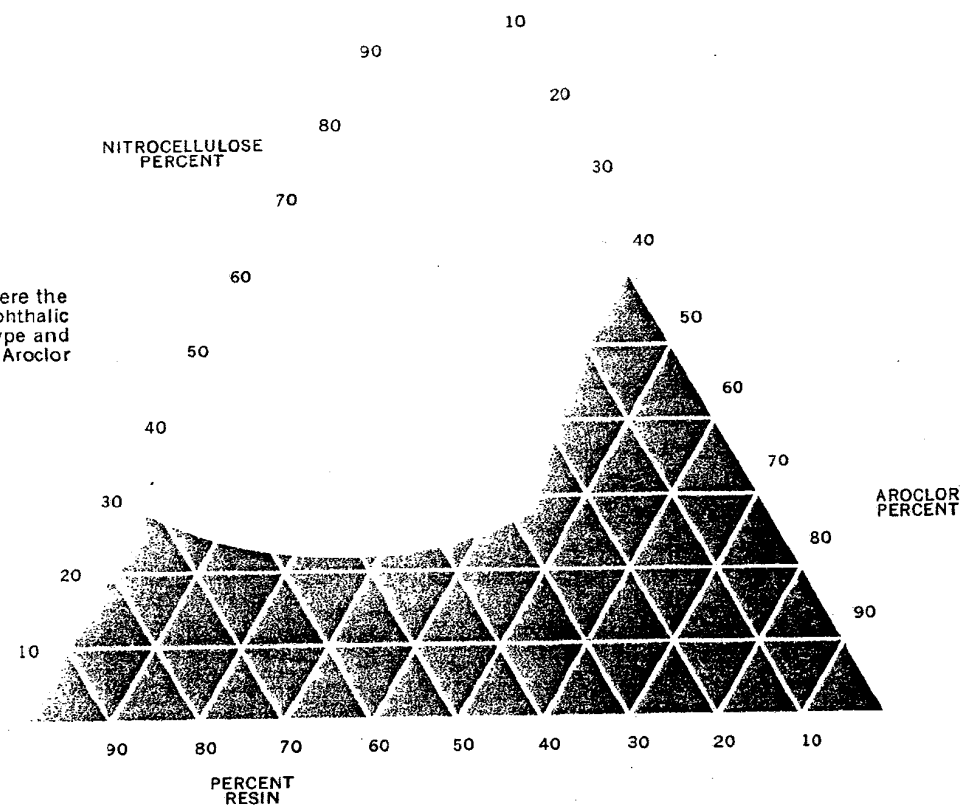

DSW 263734

TOWOLDMON0003903
WATER_PCB-00000925

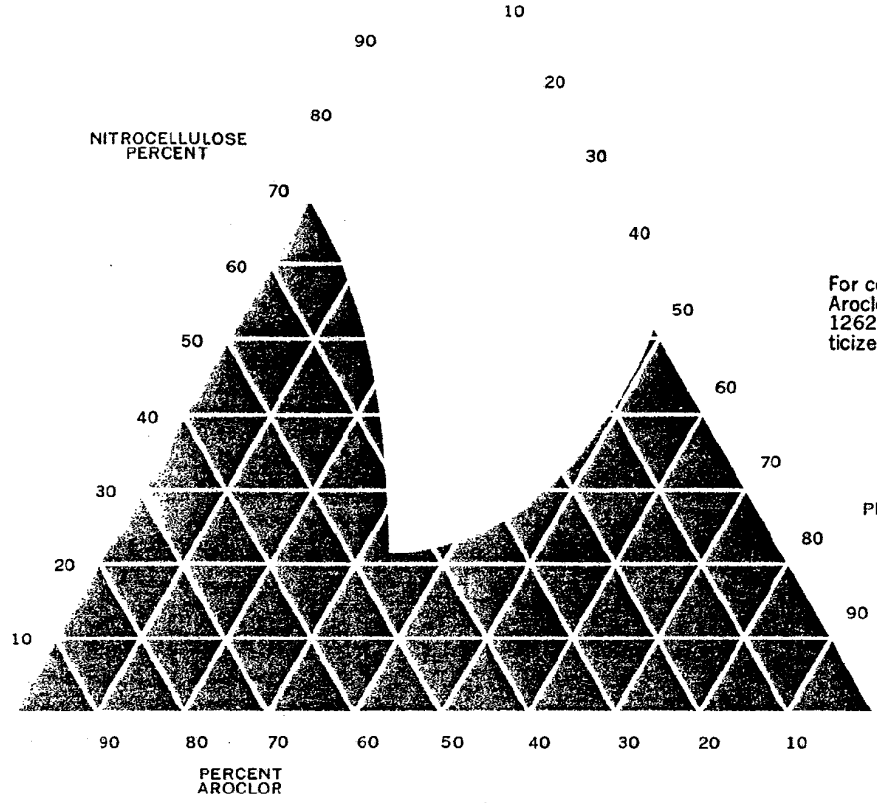

For combinations where the Aroclor resin is Aroclor 1262* and where the plasticizer is Dibutyl Phthalate.

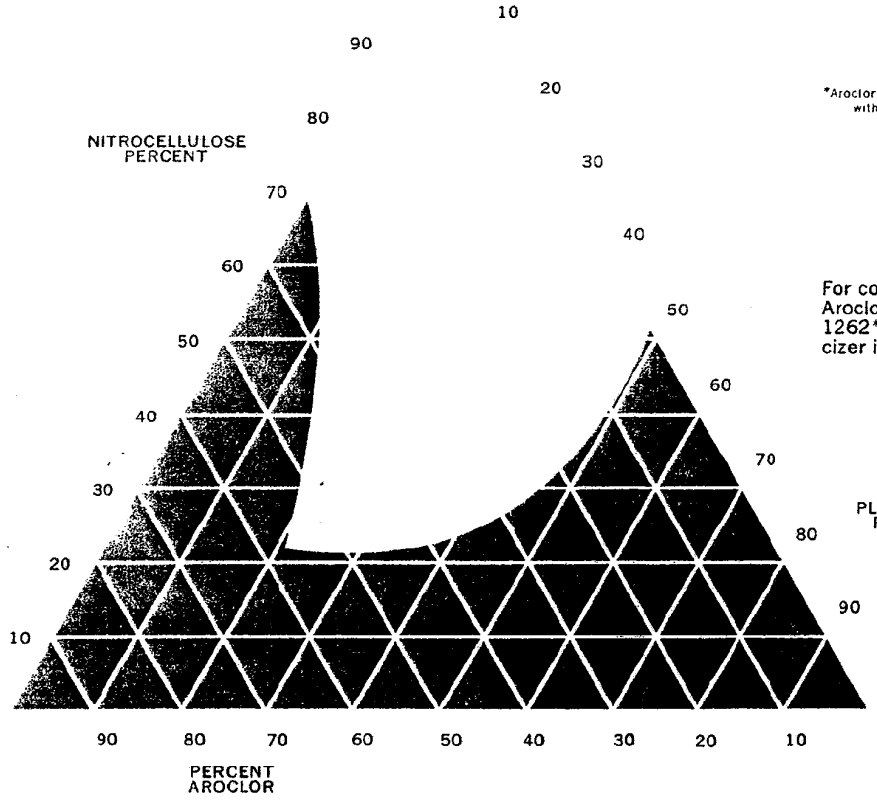

For combinations where the Aroclor resin is Aroclor 1262* and where the plasticizer is Tricresyl Phosphate.

*Aroclor 1260 may be substituted without material change.

DSW 263735

CHLORINATED RUBBER AND STYRENE-BUTADIENE COPOLYMERS

Aroclors are outstanding for compounding modified rubber finishes. They impart exceptional corrosion resistance, chemical resistance, oxidation resistance to these coatings, and improve adhesion. Typical applications include masonry coatings for swimming pools, stucco homes and highway paints, as well as protective and decorative coatings for steel structures, railway tank and gondola cars, wood and metal maritime equipment.

In rubber base coatings, Aroclor 1254 is used as a liquid flexibilizing plasticizer and commonly used in combination with Aroclor 5460 which serves as a resin fortifier. The outstanding chemical resistance, corrosion resistance and oxidation resistance of rubber base Aroclor coatings make them outstanding protective coatings for chemical plants, boats, highway marking, and masonry. Monsanto Technical Bulletins No. PL-306, PL-311, and PL-326 cover the use of Aroclors in rubber base coatings.



DSW 263736

TOWOLDMON0003905
WATER_PCB-00000927

CELLULOSE ACETATE BUTYRATE LACQUERS

The higher Aroclor compounds are widely used with cellulose acetate butyrate, in the manufacture of low cost lacquers that are flame resistant. Typical uses for this type of lacquer include paper coating, lacquers for plastics and strippable coatings for paint booths.

A typical paper lacquer with minimum tendency to curl is reported* to contain the following:

	By Weight
Half-second Butyrate	20%
Aroclor 1260	20%
Acetone	10%
Isobutyl Acetate	10%
Ethyl Alcohol	10%
Toluene	30%

ETHYL CELLULOSE COATINGS

The Aroclors are highly compatible with ethyl cellulose. The liquid Aroclors impart great flexibility, the resinous Aroclors impart great hardness. For example, 75 parts by weight of Aroclor 1242 with 100 parts of ethyl cellulose produces great flexibility and a slight tackiness. Aroclor 5460 on the other hand — in the same proportion — produces a very hard and somewhat brittle composition.

For coatings of high gloss and exceptional weathering properties to be applied to rigid surfaces, compositions containing equal parts by weight of Aroclor 5460 and ethyl cellulose are recommended. For more flexibility in the coating one of the softer Aroclors should be used — either alone or as a partial replacement for the Aroclor 5460.

Ethyl cellulose formulations plasticized with Aroclors find end use applications as protective lacquers, adhesives, and as strippable coatings.

The solid Aroclor compounds, such as Aroclor 5460 are widely used in hot melt applications for the protection of tools and metal parts. They are normally used with ethyl cellulose or cellulose acetate-butyrate resins.

CREPE RUBBER COATINGS

Aroclor 1262 is used as a low cost plasticizer for crepe rubber in paint compositions. Used in concentrations of 5 to 50% based on the weight of the rubber polymer, it increases the gloss and alkali resistance of the film and strengthens the adhesion of the film to steel.

*W. M. Gearheart and F. M. Ball, OFFICIAL DIGEST, Vol. 343, 1953.

DSW 263737

TOWOLDMON0003906
WATER_PCB-00000928

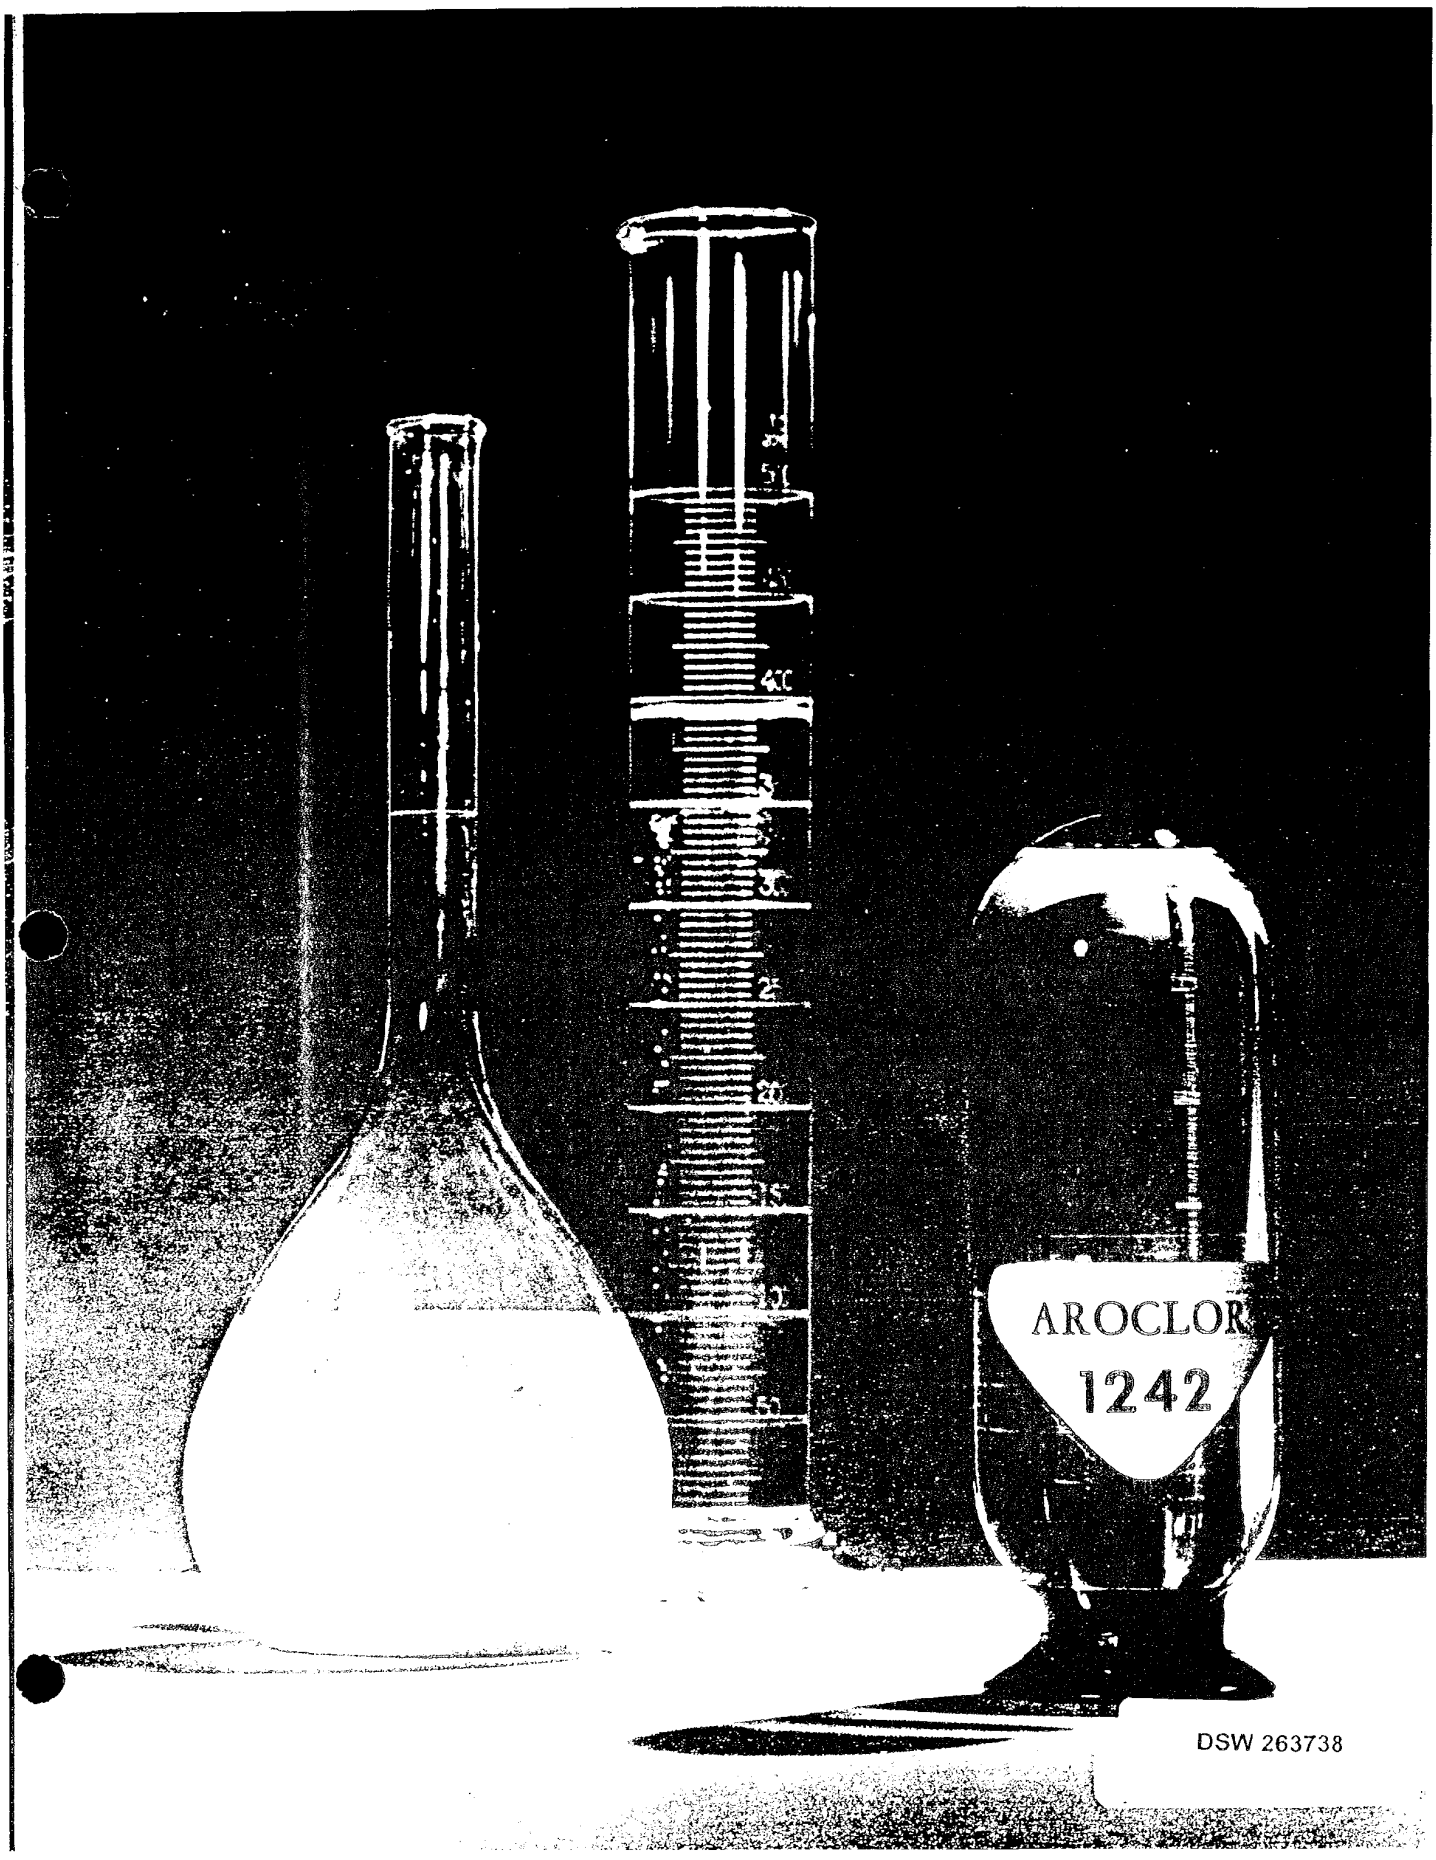
AROCLOR
1242
DSW 263738

appendix

METHODS FOR EMULSIFYING AND MAKING STOCK SOLUTIONS OF AROCLORS

There are several simple methods for making Aroclor emulsions; the one used may be selected to suit the kind of Aroclor and type of formulation in which it will be used.

Emulsifying Viscous Aroclors

(Portion 1)	16 lbs. of Aroclor 1 lb. of Stearic Acid
(Portion 2)	8 lbs. of water 4 oz. Triethanolamine

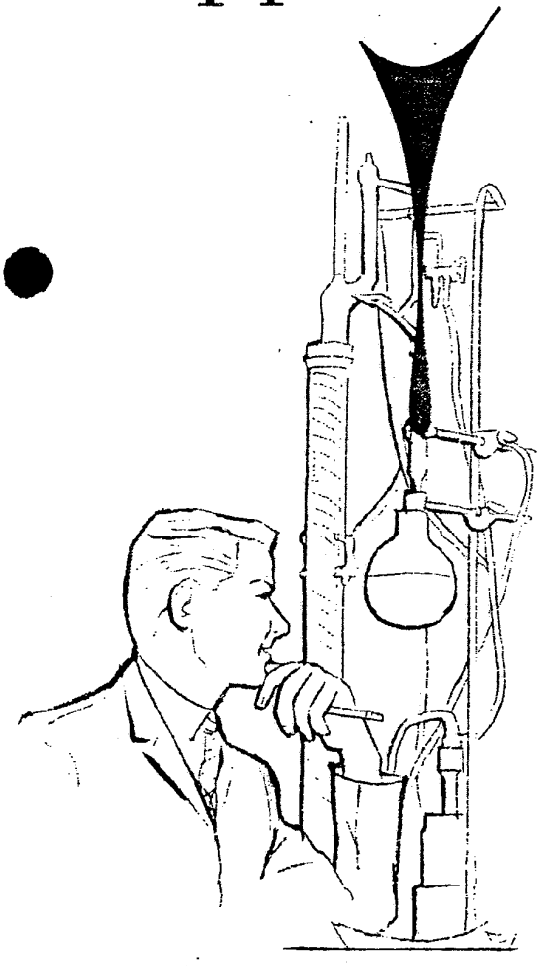

Heat the Aroclor to a workable viscosity (180°F plus) and stir in the stearic acid thoroughly. Heat the water to almost boiling (207°F) and stir in the triethanolamine thoroughly. Pour the Aroclor-stearic acid portion *into* the water portion agitating vigorously. Then process the combined portions with a high-speed emulsifying stirrer . . . or process through a colloid mill.

Emulsifying Liquid Aroclors

(Portion 1)	100 parts Aroclor 1254 4 parts Oleic Acid
(Portion 2)	92 parts water 2 parts Ammonium Hydroxide (28%) 2 parts Lustrex* X-810

Mix the ammonium hydroxide and Lustrex X-810 thoroughly in the warmed water, using vigorous agitation. Mix the Aroclor 1254 and Oleic Acid, heat to 45°C and agitate vigorously. Maintain the 45°C temperature and agitation — and add in *slowly* the water portion. Continue agitation for one-half hour till phase inversion is complete.

Emulsifiable Concentrated Stock Solutions of Aroclors

79 parts of Aroclor
16.70 parts of toluene
3.55 parts of isopropyl alcohol
1.00 parts of Sterox* CD (non-ionic emulsifier)
0.75 parts of Santomerse* #3 (anionic wetting agent)

The above formulation is readily emulsifiable with water. If the more resinous Aroclors are used, increase the amount of toluene (or xylene) as needed to dissolve the Aroclor resin.

*Trademarks Monsanto Chemical Co., Reg. U. S. Pat. Ofc.

DSW 263739

TOWOLDMON0003908
WATER_PCB-00000930

SOLUBILITY OF AROCLORS IN 100 MILLILITERS OF VARIOUS SOLVENTS

Aroclor	1242		1248		1254		4465		5460
Type of Solvent	25°C	Hot	25°C	Hot	25°C	Hot	Cold	Hot	25°C
Acid									
Acetic Acid	S	S	—	—	S	S	SS	S	—
Oleic Acid	S	S	—	—	S	S	S	VS	—
Benzoic Acid	10.0 31°C	—	10.0 32°C	—	—	—	—	—	—
Aldehyde									
40% Formaldehyde	I	I	I	I	I	I	I	I	—
Furfural	VS	VS	VS	VS	VS	VS	VS	VS	—
Amine									
Aniline	S	S	—	—	S	S	VS	VS	—
Pyridine	132.5 30°C	440 99°C	—	—	114 31°C	425 100°C	VS	VS	—
Chloro—derivatives									
Amyl chlorides—mixed	S	S	S	S	S	S	VS	VS	—
Carbon Tetrachloride	S	S	S	S	S	S	VS	VS	156
Chloroform	S	S	S	S	S	S	VS	VS	—
Dichlorethylene	—	—	—	—	—	—	VS	VS	—
Ethylene Dichloride	S	S	S	S	S	S	VS	VS	—
Monochlorobenzene	S	S	S	S	S	S	VS	VS	—
Orthodichlorobenzene	—	—	—	—	—	—	VS	VS	—
Tetrachlorethane	S	S	S	S	S	S	VS	VS	—
Trichlorethane	S	S	S	S	S	S	VS	VS	—
Trichlorethylene	S	S	S	S	S	S	VS	VS	—
Drying Oil									
Tung Oil	S	S	S	S	S	S	VS	VS	—
Linseed Oil	S	S	S	S	S	S	VS	VS	—
Ester									
Amyl Acetate	S	S	S	S	S	S	VS	VS	—
Butyl Acetate	S	S	S	S	S	S	VS	VS	—
Cellosolve Acetate	S	S	S	S	S	S	VS	VS	—
Cottonseed Oil	S	S	S	S	S	S	S	VS	—
Dibutyl Phthalate	S	S	S	S	S	S	S	VS	—
Diethyl Phthalate	S	S	S	S	S	S	S	VS	—
Ethyl Acetate	S	S	S	S	S	S	S	VS	—
Ethyl Lactate	S	S	S	S	S	S	VS	VS	—
Ethylene Glycol Diacetate	S	S	S	S	S	S	VS	VS	—
Methyl Acetate	S	S	S	S	S	S	S	S	—
Tricresyl Phosphate	S	S	S	S	S	S	SS	S	—
Ether: Ethyl Ether	S	S	S	S	S	S	S	—	—
Ether Alcohol									
Carbitol	224 31°C	307 99°C	VS	VS	173 26°C	259 98°C	SS	—	—
Cellosolve	S	S	S	S	S	S	S	—	—
Diethylene Glycol	—	—	—	—	—	—	S	—	—
p-p′ Dihydroxy Ethyl Ether	16.9 23°C	19 99°C	SS	SS	8 30°C	10 100°C	SS	—	—
Hydrocarbon									
Benzene	VS	VS	VS	VS	VS	VS	VS	VS	143
Gasoline	VS	VS	VS	VS	VS	VS	VS	VS	—
Kerosene	VS	VS	VS	VS	VS	VS	VS	VS	—
Mineral Spirits	VS	VS	VS	VS	VS	VS	VS	VS	—
Paraffin	2.0 27.5°C	S	2.0 26°C	S	—	S	<5.0	S	—
Pine Oil	S	S	VS	VS	S	S	S	S	—
Toluene	VS	VS	VS	VS	VS	VS	VS	VS	142
Turpentine	VS	VS	VS	VS	VS	VS	VS	VS	—
Xylene	VS	VS	VS	VS	VS	VS	VS	VS	178
Hydroxy—derivatives									
Amyl Alcohol	S	S	—	—	S	S	S	S	—
n-Butyl Alcohol	S	S	—	—	S	S	SS	S	—
Ethyl Alcohol (3-A)	23.3 29°C	80.0 70°C	—	—	10 27°C	28 75°C	SS	—	—
Glycerine	I	I	I	I	I	I	I	I	—
Methyl Alcohol	42.5 29°C	88.5 60°C	—	—	15 26°C	22.2 65°C	SS	—	—
Phenol—90%	194 30°C	S	—	—	SS	S	S	S	—
Ketone									
Acetone	S	S	—	—	S	S	S	S	260
Miscellaneous									
Carbon Disulfide	S	S	—	—	S	S	VS	VS	—
Nitrobenzene	S	S	—	—	S	S	VS	—	—
Water	I	I	I	I	I	I	I	I	—

I—Insoluble S—Soluble SS—Slightly Soluble VS—Very Soluble

Figures show grams of Aroclor per 100 milliliters of solvent at 25°C unless otherwise indicated.

DSW 263740

TOWOLDMON0003909
WATER_PCB-00000931

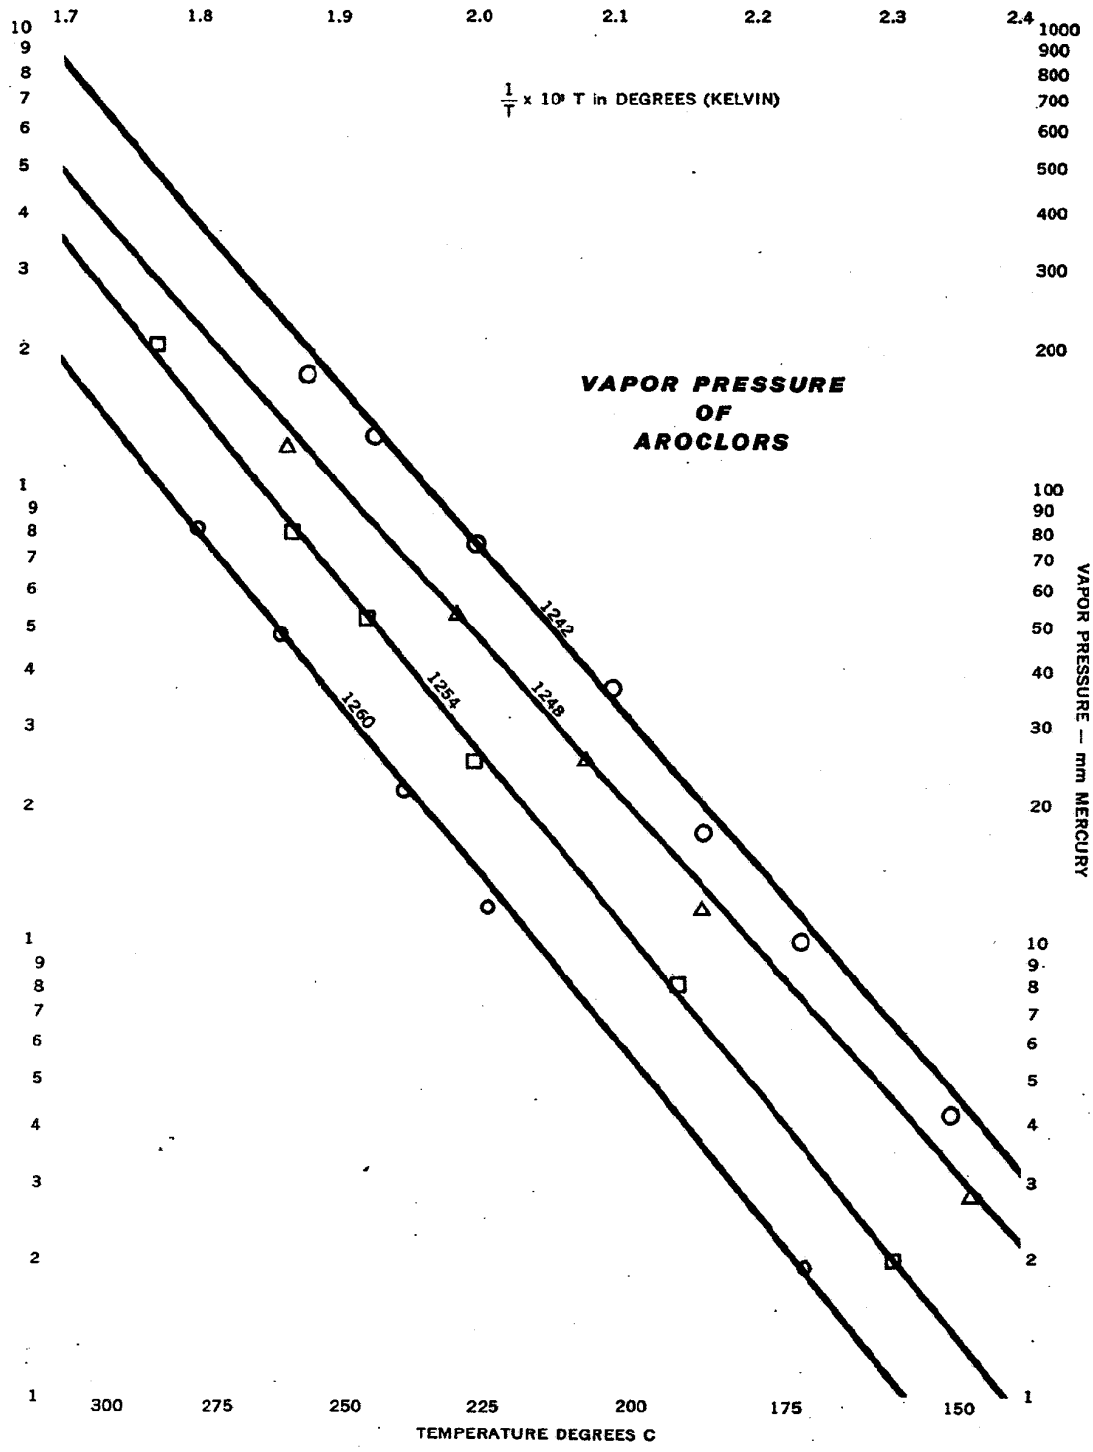

DSW 263741

TOWOLDMON0003910
WATER_PCB-00000932

VAPORIZATION RATES

At 100°C and 760 mm. Hg.

Sample	Wt. Loss Gms.	Hours Exposure	Surface Area $Cm.^2$	Vaporization Rate $gms./cm.^2hr.$
Aroclor 1221	0.5125	24	12.28	0.00174
Aroclor 1232	0.2572	24	12.28	0.000874
Aroclor 1242	0.0995	24	12.28	0.000338
Aroclor 1248	0.0448	24	12.28	0.000152
Clorafin-42-S	0.0745	48	12.28	0.000126
DOP (dioctyl phthalate)	0.0686	48	12.28	0.000117
Dutrex 25	0.0256	24	12.28	0.000087
Aroclor 1254	0.0156	24	12.28	0.000053
Dutrex 20	0.0047	24	12.28	0.000016
Aroclor 1262	0.0039	24	12.28	0.000013
Aroclor 1260	0.0026	24	12.28	0.000009
Aroclor 4465	0.0064	72	12.28	0.000007
Aroclor 1270	0.0045	72	12.28	0.000005
Aroclor 5442	0.0039	72	12.28	0.000004
Aroclor 5460	0.0032	72	12.28	0.000004
Tricresyl phosphate	0.0010	24	12.28	0.000003

APPROXIMATE VAPOR PRESSURES
CALCULATED AT 100° F (37.8° C)

Aroclor 1232	0.005 mm. Hg.
Aroclor 1242	0.001 mm. Hg.
Aroclor 1248	0.00037 mm. Hg.
Aroclor 1254	0.00006 mm. Hg.

DSW 263742

TOWOLDMON0003911
WATER_PCB-00000933

RESISTANCE OF STRUCTURAL MATERIALS TO AROCLORS

Metals	Aroclor Number 1248 25°C	1248 125°C	1254 25°C	1254 125°C	4465 125°C	5460 125°C
Aluminum	R	R	R	R	*RR	RR
Copper	R	D	R	D	D	D
Magnesium	RR	R	R	R	RR	*RR
Nickel	RR	R	R	RR	RR	R
Silver	R	R	R	R	R	R
Tin	R	R	R	R	R	R
Zinc	R	R	R	R	R	RR
Mild Steel	RR	R	RR	RR	R	RR
Phosphor Bronze	R	D	R	R	R	R
Red Brass	D	D	R	D	R	De
Stainless Steel (Type 316)	RR	RR	RR	RR	RR	RR
Yellow Brass	R	Re	R	De	Re	Re
Plastics						
Alkyd Resin No. 46594-12	*P	P	*P	P	P	P
Alkyd Resin No. 46594-13A	*D	P	*D	P	P	P
Cellulose Acetate (Fibestos)	D	P	D	P	P	P
Durite Phenol Furfural Resin	*D	P	*R	P	D	P
Formvar Highly Plasticized	De	T	Pe	T	T	T
Formvar Low Plasticized	PS	T	PS	T	T	T
Glyptal 1276	R	P	D	P	P	P
Glyptal 7136	*D	T	*R	T	T	T
Maleic Resin No. 46594-13B	P	P	*P	P	P	P
Maleic Resin No. 46594-13C	P	P	*R	P	P	P
Plexiglas (Methyl Methacrylate)	*D	P	*D	P	P	P
Polystyrene (Lustron B)	P	T	P	T	T	T
Resinox Mineral Filled Melamine Resin	*D	*P	*R	R	*P	*D
Resinox Wood Flour Filled Melamine Resin	*D	P	*R	D	R	P
Resinox Mineral Filled Phenol Formaldehyde	*D	D	*D	D	R	P
Resinox Wood Flour Filled Phenol Formaldehyde	*D	P	*D	*R	D	P
Resinox Rag Filled Phenol Formaldehyde	*D	D	*D	*D	*D	P
Urea Formaldehyde Resin (Plaskon Co.)	*D	P	*D	*P	P	P

Meaning of Abbreviations:

*—Based on weight gain calculated as penetration value shown.

RR—Excellent resistance—less than 1.0×10^{-6} cm/day penetration or .00014 in/yr.

R—Good resistance—has penetration between 1.0×10^{-6} and 10×10^{-6} cm/day or between 0.00014 and 0.0014 in/yr.

D—Doubtful resistance, penetration between 10×10^{-6} cm/day and 100×10^{-6} cm/day or between 0.0014 and 0.014 in/yr.

P—Poor resistance—penetration greater than 100×10^{-6} cm/day or 0.014 in/yr.

PS—Poor resistance due to visible local action although weight change indicates greater resistance.

e—Following the letter indicating resistance signifies material may be better than indicated if totally immersed since weight loss is believed to come from oxidation of the part of test strip exposed to air.

T—Material alone will not stand temperature.

DSW 263743

TOWOLDMON0003912
WATER_PCB-00000934

VISCOSITY RANGES OF SOME OF THE AROCLORS

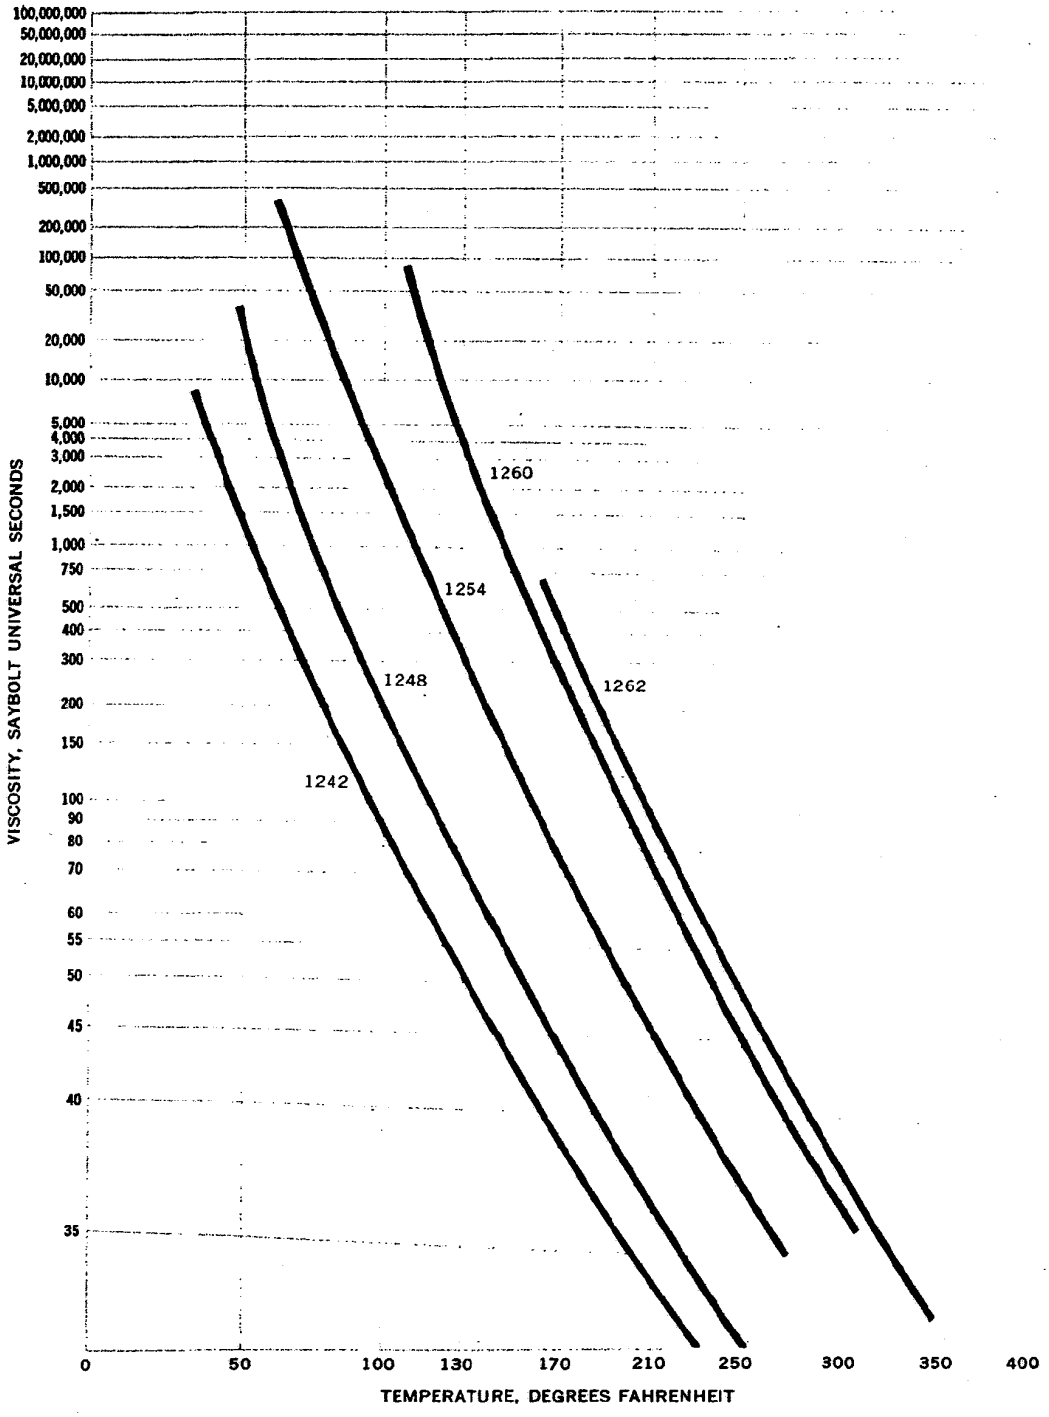

DSW 263744

TOWOLDMON0003913
WATER_PCB-00000935

DENSITIES OF AROCLORS AT VARIOUS TEMPERATURES

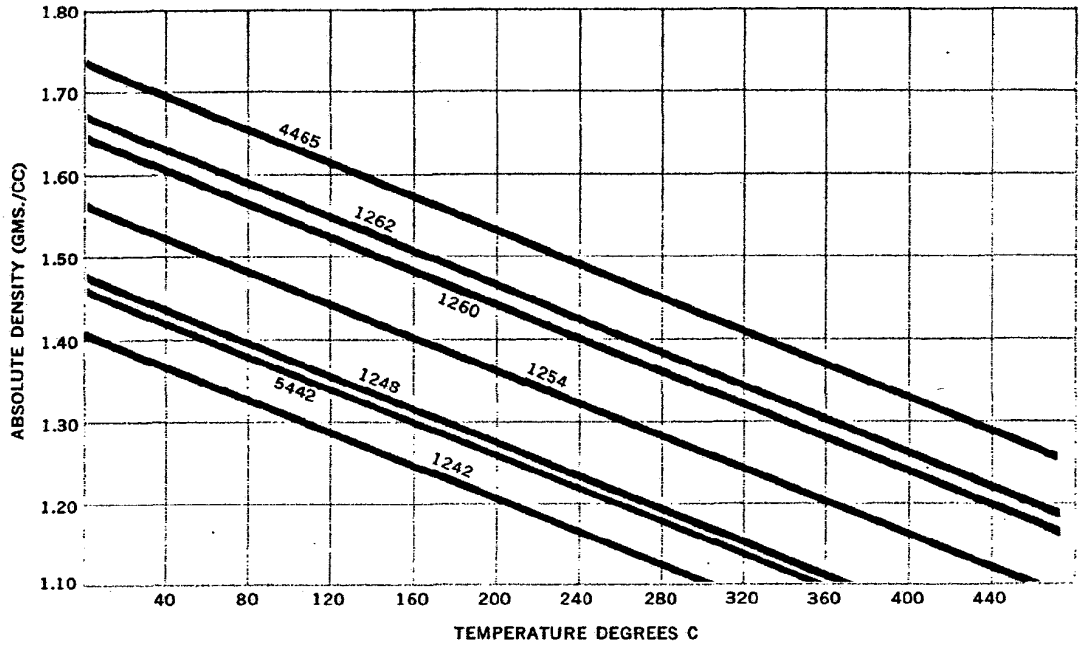

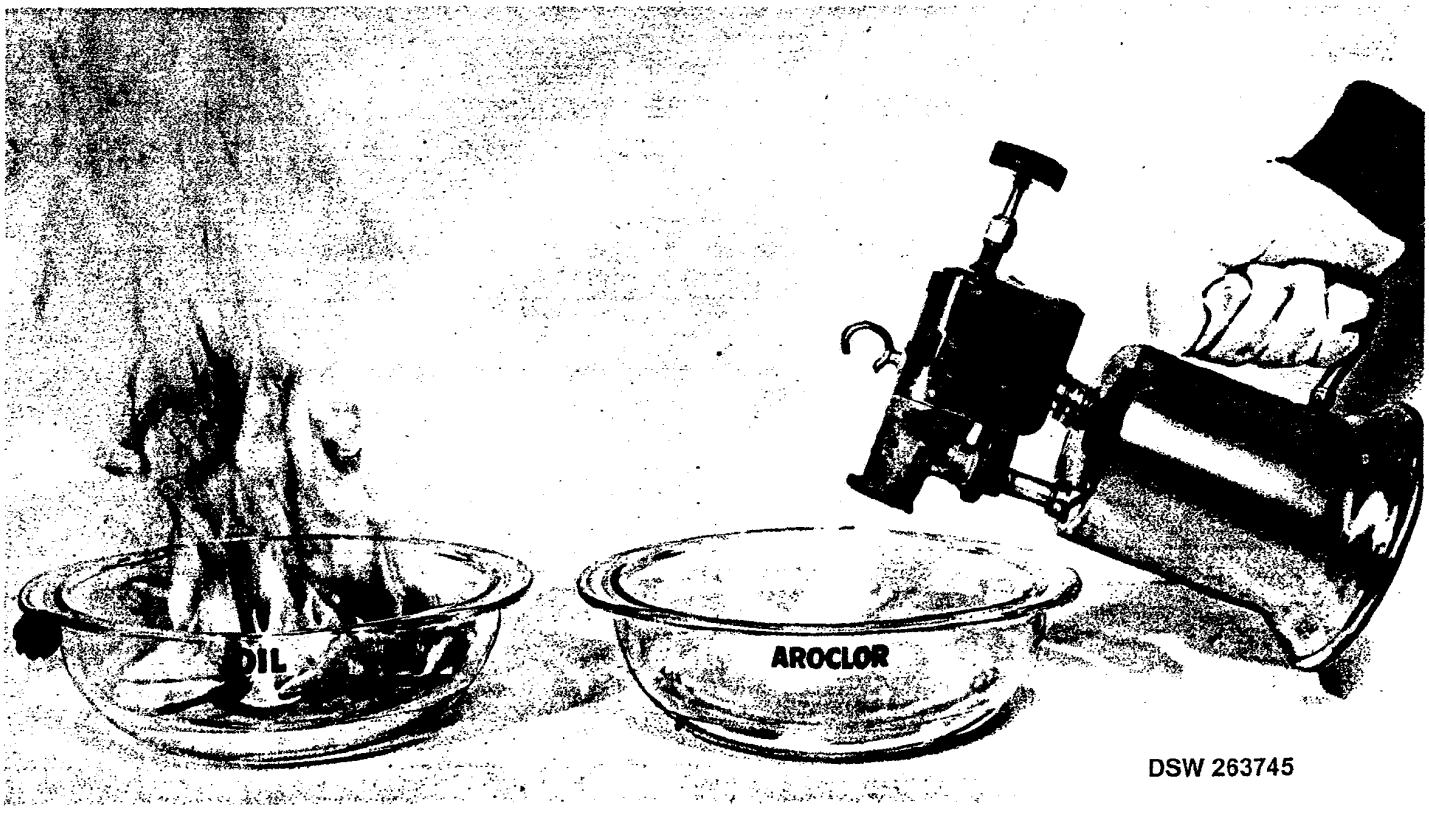

DSW 263745

TOWOLDMON0003914
WATER_PCB-00000936

At ordinary temperatures Aroclors have not presented industrial toxicological problems. Where Aroclor vapors may be encountered in workrooms, local exhaust ventilation together with general workroom exhaust is recommended.

Skin patch tests with a polyvinyl chloride free film plasticized with 11.5% by weight of Aroclor 1254 (about 25% based on the weight of the vinyl resin) and a similar amount of dioctyl phthalate showed that this film was not a primary irritant or a sensitizer. Skin patch tests with Aroclor 1254 alone applied to gauze and placed in contact with the skin showed no primary irritancy or sensitization. Other skin patch tests using canvas coated with Aroclor 5460 and an oil modified alkyd resin, in such a manner that the Aroclor concentration in the paint film on the fabric was about 17% by weight of paint solids and the finished coated fabric contained approximately 7% by weight of Aroclor 5460 showed that this painted fabric did not produce a primary irritancy or sensitization of the skin.

If Aroclors are spilled on the skin, the skin should be washed in the usual manner with soap solutions. If accidental burns occur from contact with hot Aroclors, the burn should be treated the same as any ordinary burn. Aroclor adhering to the burned area need not be removed immediately unless treatment of the burn demands it, in which case use soap and water or repeated washings with a vegetable oil.

Monsanto

DSW 263746

TOWOLDMON0003915
WATER_PCB-00000937

fire retardant

inert

shear resistant

heat stable

lubricating

aroclors for...

physically "adjustable"

adhesive

non-volatile

low cost

thermoplastic

FILM FORMING

IMPREGNATING

INSULATING

HEAT TRANSFER

DEDUSTING

INERT MATRIXES

PLASTICIZING

BULKING

COATING

"TACKIFYING"

REDUCING VOLATILITY

Aroclors are the only low cost, inert, inter-compatible liquids and solids whose intermixing can provide insulating, lubricating, fire retardant liquids ranging from the consistency of light mineral oil to the most viscous syrup (or solid resin) which will do so many jobs in industry.

Division • 800 North Lindbergh Blvd. • St. Louis 66, Missouri

The information in this bulletin is, to our best knowledge, true and accurate, but all recommendations or suggestions are made without guarantee, since the conditions of use are beyond our control. The Monsanto Chemical Company disclaims any liability incurred in connection with the use of these data or suggestions. Furthermore, nothing contained herein shall be construed as a recommendation to use any product in conflict with existing patents covering any material or its use.

DSW 263747

TOWOLDMON0003916
WATER_PCB-00000938



Monsanto Chemical Company • Organic Chemicals Division • St. Louis 66, Missouri

Monsanto

DSW 263748

9-800-0560-53 LITHO IN U. S. A.

TOWOLDMON0003917
WATER_PCB-00000939

1. Brink elements for chlorine line: (2)

Items 115 (old) and 590 (new)

Element # 1542 A-3-2 — 15" dia x 42" long
55 316 (special glass packing) — 4" flanges
1" s.q. wire mesh, 0.12" wire — 2'5" dip pipes
Design pressure: 50 psig.
" temps.: 300° F.

2. Brink elements for old chlorinators: (5)

Items 110, 111, 112, 113, 114

Element # 1542 A-3-2 — 15" dia x 42" long
Carbon steel — 3" flanges
15' dip pipe

3. Brink elements for new chlorinators: (4)

Items 409, 413, 417, 421

Element # 1584 — 15" dia. x 85" long
Carbon steel — top side flanges, dip pipes and seal pot

DSW 263749

TOWOLDMON0003918
WATER_PCB-00000940

MONSANTO CHEMICAL COMPANY
ENGINEERING SALES DEPARTMENT
800 North Lindbergh Boulevard
Box 526
St. Louis 66, Missouri

BRINK MIST ELIMINATOR
INSTALLATION AND OPERATING INSTRUCTIONS
MONSANTO - W. G. KRUMMRICH PLANT
P. O. B-916 and B-917 - MCC-B-710 & 710.2

DESCRIPTION

Please refer to drawing details of the Brink element and tank housing.

The Brink element consists of a cylindrical fiber packed unit with a mounting flange at the top end. The cleaned effluent gas from the element leaves at this same end which is open at the center. The entrained liquid is collected on the fibers and passes downwardly to the closed bottom end of the element and is drained by the dip pipe.

The Brink element has been ruggedly built so that it can be re-packed many times by Monsanto's shop if found necessary.

INSTALLATION

The element mounting flange is bolted to the cover plate of the tank housing. A gasketed seal is required and it is vitally important that the flange be tightly sealed against gas leakage. Any gas leakage around the flange will materially reduce the overall collection efficiency.

A special gasket made of woven asbestos impregnated with [illegible]. Draw the flange down snugly against the gasket using studs or cap screws as specified on the drawing for your installation.

Before starting the plant, be sure that all dust and debris has been removed from the equipment and duct work.

DSW 263750

TOWOLDMON0003919
WATER_PCB-00000941

When everything is clean, pour a sufficient amount of acid down the center of element so that the tank sump is filled up to the overflow nozzle. The tank sump must be full of liquid at all times so that the bottom end of the dip pipe is always covered with liquid. If the dip pipe is not covered with liquid, the process gas will have a direct by-pass through the dip pipe.

OPERATION

Upon starting, the pressure drop across the mist eliminator should be checked. For a few hours, the pressure drop will be lower than normal, i.e. until normal liquid holdup is reached in the fiber bed. The time required depends on the amount of liquid mists present in the gas.

Operation of the Brink Mist Eliminator is simple and straightforward. Once the unit is on the line it should be observed from time to time to see that performance is satisfactory. Pressure drop across the unit should be recorded periodically, and compared with gas through-put rates to see that no great change is taking place.

If, during continuous operation, the pressure drop falls off appreciably, it may be due to leaks past the gasket surfaces, erosion of the fiber bed in one or more elements, or some other factor outside the equipment itself.

On the other hand, if the pressure drop increases during operation, it is a sign that the fibers are becoming blinded. Such a condition can result from entrainment in the gas of solids, tars or any foreign material, which is not being removed from the elements by natural irrigation.

If the problem is an excessive reduction in pressure drop, check whether leakage of gases past the fiber beds is occurring. If so, the unit must be shut down for inspection and possible repair.

If the pressure drop increases, without leveling out at an acceptable value, the unit should probably be cleaned. This decision can be made only after inspection.

TOWOLDMON0003920
WATER_PCB-00000942

MAINTENANCE

If a blinded element is suspected, it may be possible to clean the element in place by filling the tank with a solvent and then draining the solvent. Repeat this several times. Then plug the dip pipe and back wash by introducing the solvent in the center of element and allowing solvent to flow by gravity.

Under no case should the element be washed with a high velocity stream from a hose.

An alternate method is to lay the element in a trough. After thorough dilution of materials left in the element with the solvent it should be rocked gently for a period to dislodge any solid particles adhering to the element surface. If water is used, a neutral detergent may be added. Care should be taken, if a flammable solvent is used, to prevent fire or explosion.

If an organic solvent is used which contains tars or a precipitable material such as tetra ethyl lead, this solvent should be subsequently washed out with sudsy water, using a neutral detergent.

If damage to the element is suspected, the element should be pulled out of the support plate for external inspection. The wet element weight will be much higher, of course, than the weight when installed dry.

After cleaning, the element should be drained for several hours before putting back into service.

Be sure when reinstalling the element to use a new gasket of the proper material (see "Installation").

REPLACEMENT AND/OR REPACKING

In order to assure efficient collection of suspended matter, it is advisable that only engineers experienced in Brink Eliminator technique be used to change, alter or repack the fiber bed within the Brink Mist Eliminator element. Return the element with fiber removed, to: Monsanto Chemical Company, c/o Lyon Sheet Metal Works, Inc., 5263 Northrup Avenue, St. Louis 10, Missouri

DSW 263752

7/29/63

TOWOLDMON0003921
WATER_PCB-00000943

MONSANTO CHEMICAL COMPANY — ENGINEERING SALES DEPT. — ST. LOUIS, MO.

DESIGN COMPUTATIONS OR SKETCH

△2 REV. 2/10/64
△1 REV. 2/3/64

Project	Made By	Date	Revision	Page of Pages
P.O. #B-917. MONSANTO - W&K PLANT	W.W.	5/1/63	2/3/64	2 | 2

Item No.	Description
MCC-B-710	BRINK ELEMENT INVERTED TYPE #1542

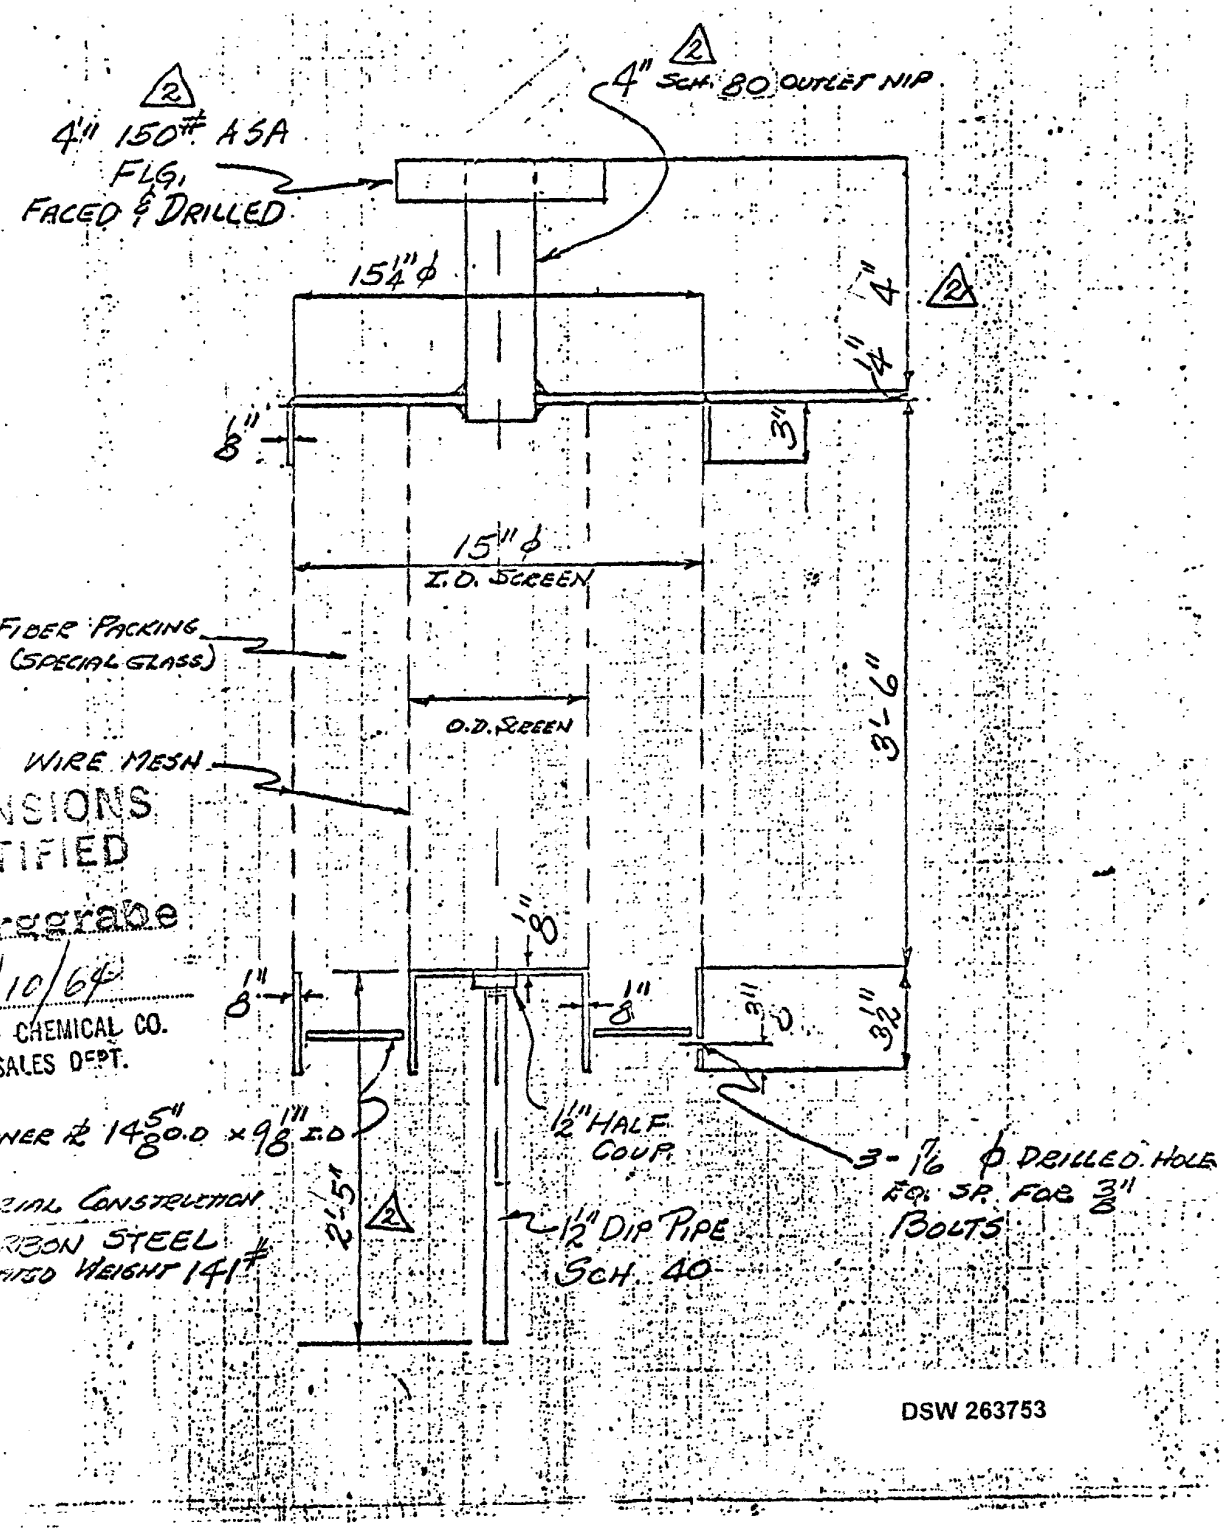

DIMENSIONS CERTIFIED
W.F. Burggrabe
DATE 2/10/64
MONSANTO CHEMICAL CO.
ENG. SALES DEPT.

MATERIAL CONSTRUCTION
CARBON STEEL
ESTIMATED WEIGHT 141#

DSW 263753

TOWOLDMON0003922
WATER_PCB-00000944

Monsanto COMPANY

SPECIFICATION DATA
PERFORMANCE DATA

EQUIP. NO. 409, 413, 417, 421
AUTH NO. 1800 AREA NO. 1
BY R S YATES DATE 10/17/67
APPD SHEET 1 OF 1

PROJ DEPT 811.00
PLANT W G KRUMMRICH
LOCATION ABOVE CHLORINATOR

NAME MIST ELIMINATOR NO. REQD 4

FUNCTION REMOVE AROCLOR ENTRAINMENT FROM PROCESS GAS FLOW FROM CHLORINATORS 6, 7, 8, 9 (ITEMS 406, 410, 414, 418)

OPERATION CONTINUOUS GAS FLOW - REMOVE ENTRAINED PARTICULATE MATTER

MATERIALS HANDLED

HCl GAS STREAM WITH ENTRAINED AROCLOR AND BIPHENYL

COMPOSITION:		
HYDROGEN CHLORIDE	75.6%	BY WT
AIR	21.5%	" "
CHLORINE	1.5%	" "
BIPH & AROCLOR	1.5%	" "

PROCESS DATA

GAS FLOW		148	ACFM
TEMPERATURE		150	°C
INLET PRESSURE		6	PSIG
INLET MIST LOADING		2000	MG/ACFM
LIQUID VISCOSITY	≤	10	CPS
LIQUID pH	≤	7	

EQUIPMENT SPECS, MATL OF CONST, ETC. CORROSION ALLOWANCE 1/8"

OUTLET MIST LOADING	20	MG/ACFM
EFFICIENCY	99	% ON PARTICLES 3 MICRONS AND SMALLER
PRESSURE DROP	5	INCHES WATER WHEN WET WITH COLLECTED MIST

MATERIALS OF CONSTRUCTION:
CARBON STEEL, CLASS II, SPEC D2.1 STD 3
DESIGN PRESSURE, 30 PSIG
DESIGN TEMPERATURE, 450°F

PAINT: SPEC K1.3 STD 1320

REMARKS, TESTS, SPECIAL FEATURES, ETC.

1) UNIT REQD - BRINK MIST ELIMINATOR (MONSANTO ENGR SALES)
SIZE 15" DIA x 8.5" LONG ELEMENT INSTALLED IN A 20" DIA x 8'2" HIGH TANK WITHOUT A BOTTOM.
BOTTOM TO BE FIELD WELDED TO TOP OF CHLORINATOR.
FLANGED COVER. GAS OUTLET NOZZLE
2) DRAIN PIPE - DRAIN AND SEAL POT TO BE CONSTRUCTED OF 2" SCH 80 CS PIPE WITH SCREWED CONNECTION. OVERALL LENGTH 11'0" SEAL WILL BE THE CHLORINATION MASS.
3) REFERENCE - PROPOSAL TO R S Y, 4-14-67, # MCB 2633.1

REV NO.	REVISION	BY	DATE	APPD	DATE
1	APPROVED FOR DESIGN	RSY	10-31-67		
2					

DSW 263754

TOWOLDMON0003923
WATER_PCB-00000945