


170-HOSE - GARAGE EXHAUST



SNAP-LOCK COUPLER *

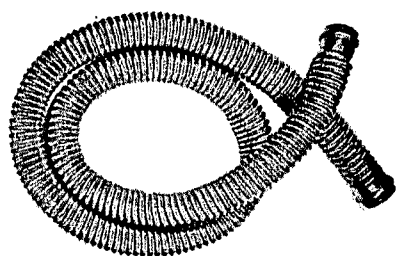

* Each 10 ft. length has Male Snap-Lock Coupler on one end and Female Coupler on opposite end - Couples easily by hand.

- Material compound from highest quality synthetic rubber and has outstanding resistance to tear, heat, oil and ozone.
- Has greater flexibility which reduces collapsing and insures longer hose life.
- Fits all standard hoses and adapters.
- Not used on large trucks or for dynamometer test.
- Not used on Diesels.

	No. 3-7180
	2 in. dia. -- 10 ft. long
TAIL PIPE TEMP. UNDER 300° F.	
	No. 3-7181
	2-1/2 in. dia. -- 10 ft. long
	No. 3-7199
	2-1/2 in. dia. -- 3 in. long
TAIL PIPE TEMP. UNDER 350° F.	
	No. 3-7182
	3 in. dia. -- 10 ft. long
TAIL PIPE TEMP. UNDER 475° F.	

DOOR PORT ADAPTERS

3-7189

Cast Aluminum for doors thicker than 1/2 inch.



3-7190

Cast Aluminum for door up to 1/2 inch thickness.

TAIL PIPE EXHAUST HOSE ADAPTERS

(For Use with Non-Crush Rubber Hose)

Adapters screw directly into 2" hose. With 2-1/2" hose, use hose coupler lock sleeve No. 3-7183, which remains in hose for quick interchange of all adapters. For use with 3" hose screw short length of 2-1/2" hose, Part No. 3-7199, into 3" section and use as suggested for 2-1/2" hose.



3-7187

Fits on outside of all Tailpipes 2-1/2" to 2" dia.



3-7188


Fits inside of Tailpipes from 1-1/2" to 2" dia. Use when obstructions prevent use of 3-7187.



3-7198

Fits on outside of ALL Underbody Tailpipes from 2" up to 2-1/4".

"Y" COUPLINGS



2 in..... **3-7184**
2-1/2 in..... **3-7185**
3 in..... **3-7186**

"Y" Couplings permit the servicing of dual systems from a single outlet stall.

HOSE COUPLER (LOCK SLEEVE)



3-7183

Use with 2-1/2 in. or 3 in. hose for quickest and easiest interchange of adapters. Screws into 2-1/2 in. hose. For use with 3 in. hose, screw short length of 2-1/2 in. hose (No. 3-7199) into 3 in. section and screw lock sleeve into 2-1/2 in. piece.