


## Waterloo Register Co. Inc.

P.O. Box 72


Waterloo, Iowa

"Since 1902"

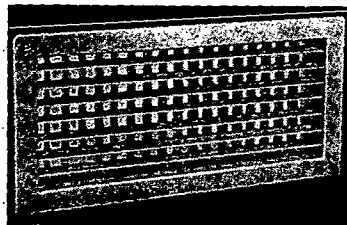


**2V COMMERCIAL TYPE GRILLE**  
for Long and Short Throw.

Each blade is individually adjustable to provide four way deflection at degree desired. Same style available as Registers with MULTI-SHUTTER or OPPOSED BLADE dampers.




**SILENT FLOW TEARDROP LOUVRE DESIGN**

This UNIQUE DESIGN provides unobtrusive diffusion. SUFFICIENT SURFACE is provided to turn high velocity air without turbulence.

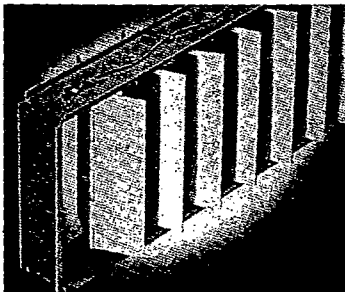


**TECHNI-LOUVRE VOLUME CONTROLLER**

Suitable for installation either in the duct or junction of the duct and a branch take-off. Either half of each blade is adjustable independent of the other half.

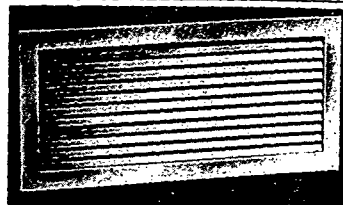


**3H RETURN AIR GRILLE**

Fins spaced on  $\frac{3}{4}$  in. centers for fixed directional supply or return at 45 deg or 0 deg deflection. Same style available as Registers with MULTI-SHUTTER or OPPOSED BLADE dampers.

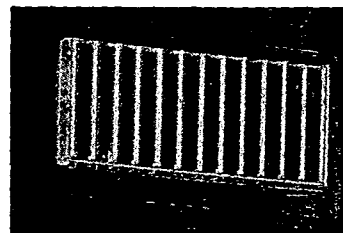

**MULTI-SHUTTER or OPPOSED BLADE DAMPERS**

Either type available with all Waterloo supply and return registers. MULTI-SHUTTER provides easy and accurate control of air volume for frequent one way adjustments. OPPOSED BLADE action allows uniform distribution of air over entire grille face.

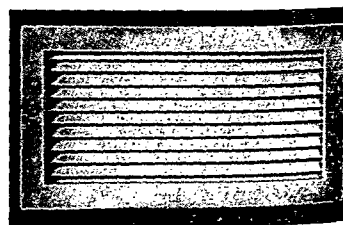

**DOOR VENTILATOR**

V-shape fins are spot-welded permanently into frame at an angle which makes it impossible to see through. Available with flange both sides, one side or channel only.


## Elgen Manufacturing Corporation

41-34 39th St., Long Island City 4, N. Y.

**ELGEN SILENT DUCT**—Pre-assembled metal and material for flexible duct connectors.

**ELGEN ALL-TITE VANE RUNNERS**—for making turning vanes for square elbows.


**ELGEN DAMPERSET**—for damper control in blower and exhaust systems.

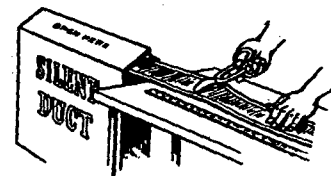

Factory-assembled metal and material. Delivered in dispenser carton . . . pulls out flat, ready to use. Union made.

- Available in 24 or 26-gauge galvanized steel . . .
- Fastened to fire, water and mildew-resistant UL approved canvas (Govt. Spec. MIL-D-10860) or to Johns-Manville asbestos (wire-filled, if

### ELGEN SILENT DUCT

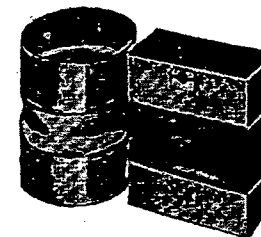


- desired) or to U.S. Rubber Co. Neoprene-coated fiber glass.
- Delivered in 100-ft (approx.) coils; 50-ft coils with asbestos available.

### ELGEN ALL-TITE VANE RUNNER


Groove Type for single blades

Button Type for single and double blades

- Quick, inexpensive method of making turning vanes.
- 24-gauge galvanized steel.
- Eliminates notching, punching, etc. No special tools needed.
- Is screwed into elbow . . . absolutely rigid and rattleproof.




FOR SINGLE BLADES ONLY



FOR SINGLE & DOUBLE BLADES

- Delivered in 8-ft strips—20 per bundle. Union made.

### ELGEN DAMPERSET

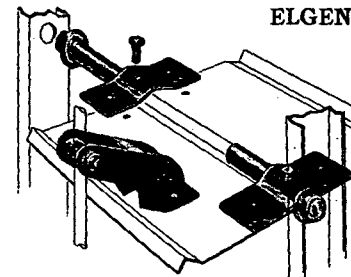

for multi-blade dampers—parallel or opposed

- Licensed by Minneapolis-Honeywell.
- Quick and easy to assemble.
- Precision-machined—cadmium plated.
- Bronze self-oiling bearings.
- Packed in single boxes or bulk 100's.

All Elgen products engineer-approved; available at leading jobbers in U. S., Canada, Hawaiian Islands. Descriptive literature on request.