



THICK BLOKS and TAPERED BLOKS

Specifications Arranged by Width for Identifications,
Refer to Block Diagrams.



PATTERN No. 1

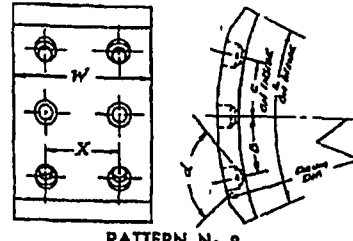

PATTERN No. 2

Pattern No.	Drum Diam.	W	X	Y	L	A	B	C	D	E	F	Counter-bore Angle	ABB-FMS Set No.
6" Width													
2	12	6	2 1/2	-	11	-	4 1/2	4 1/2	-	-	-	82°	4344D
2	12	6	2 1/2	-	11	-	4	4	-	-	-	82°	4344AD
2	12 1/2	6	4	-	10 1/2	-	3.625	3.625	-	-	-	82°	4582D
2	12 1/2	6	4	-	10 1/2	-	3.625	3.625	-	-	-	82°	4580D
2	12 1/2	6	4	-	11 1/2	-	4.409	4.409	-	-	-	82°	4501D
2	16 1/2	6	2 1/2	-	7 1/2	-	3.634	2.553	-	-	-	82°	4317ED
2	16 1/2	6	4 1/2	-	8 1/2	-	3.211	3.211	-	-	-	82°	4364BD
2	16 1/2	6	3 1/2	-	7 1/2	-	2 1/2	2 1/2	-	-	-	82°	4258D
2	17 1/2	6	2 1/2	-	8 1/2	-	3.161	3.161	-	-	-	82°	4153D
2	17 1/2	6	2 1/2	-	8 1/2	-	3 1/4	2 1/4	-	-	-	82°	4450D
2	20	6	3 1/2	-	9 1/4	-	3.523	3.523	-	-	-	82°	4268AD
2	20	6	3 1/2	-	10 1/2	-	4.197	4.197	-	-	-	82°	4354D
2	20	6	2 1/2	-	10 1/2	-	4.278	4.278	-	-	-	82°	4354AD
2	20	6	3 1/2	-	11 1/2	-	4 1/4	4 1/4	-	-	-	82°	4486D
6-1/2" Width													
2	16	6 1/2	4	-	8 1/2	-	2 1/2	2 1/2	-	-	-	82°	4270D
1	16	6 1/2	4	-	5 1/4	2 1/2	-	-	-	-	-	82°	
7" Width													
2	16 1/2	7	3 1/2	-	7 1/2	-	3.534	2.553	-	-	-	82°	4311AD
2	16 1/2	7	3 1/2	-	7 1/2	-	3.010	3.011	-	-	-	82°	4311BD
2	16 1/2	7	4 1/2	-	7 1/2	-	2.880	2.880	-	-	-	82°	4311ED
2	16 1/2	7	5 1/2	-	8 1/2	-	3.212	3.212	-	-	-	82°	4468CD
2	17 1/2	7	3 1/2	-	8 1/4	-	3.161	3.161	-	-	-	82°	4637D
2	18	7	4	-	10 1/2	-	4 1/2	4 1/2	-	-	-	82°	4250D
2	18	7	4	-	9 1/4	-	3.970	3.970	-	-	-	82°	4284D
2	18	7	3 1/2	-	8 1/2	-	3.168	3.168	-	-	-	82°	4527AD
2	18	7	4	-	8 1/2	-	3.168	3.168	-	-	-	82°	4527BD
2	18	7	4	-	9 1/4	-	3.198	3.198	-	-	-	82°	4530D
2	18 1/2	7	3 1/2	-	9 1/4	-	3 1/4	3 1/4	-	-	-	82°	4136D
2	20	7	4	-	9 1/2	-	3.794	3.794	-	-	-	82°	4427AD
8" Width													
2	17 1/2	8	4 1/2	-	8 1/4	-	3.289	3.299	-	-	-	82°	4566AD
2	17 1/2	8	5 1/2	-	8 1/4	-	3.024	3.024	-	-	-	82°	4556D
2	18	8	4	-	8 1/2	-	3.168	3.168	-	-	-	82°	4525D
2	20	8	3 1/2	-	9 1/4	-	3.523	3.523	-	-	-	82°	4350D
2	20	8	5 1/2	-	9 1/4	-	3.523	3.523	-	-	-	82°	4350AD
2	20	8	5 1/2	-	11 1/2	-	4.399	4.399	-	-	-	82°	4484D
2	20	8	3 1/2	-	11 1/2	-	4 1/4	4 1/4	-	-	-	82°	4484AD
2	16 1/2	8 1/2	4 1/2	-	7 1/2	-	2 1/4	-	-	-	-	82°	4581D