T E C H N I C A L  B U L L E T I N

# THE AROCLOR® POLYCHLORINATED POLYPHENYLS

A series of heat-resistant, chemically inert and fire-retarding compounds ranging from mobile oily liquids through viscous resins and solids that perform unique functions in over a hundred different industrial and product applications.

**TECHNICAL BULLETIN O-FF/1**

Monsanto

0515196

TOWOLDMON0035886

# THE AROCLOR® POLYCHLORINATED POLYPHENYLS

A series of heat-resistant, chemically inert and fire-retarding compounds ranging from mobile oily liquids through viscous resins and solids that perform unique functions in over a hundred different industrial and product applications.

**TECHNICAL BULLETIN O-FF/1**

FUNCTIONAL FLUIDS Monsanto®

The information contained in this bulletin is, to our best knowledge, true and accurate, but all recommendations or suggestions are made without guarantee, since the conditions of use are beyond our control. The Monsanto Company disclaims any liability incurred in connection with the use of these data or suggestions. Furthermore nothing contained herein shall be construed as a recommendation to use any product in conflict with existing patents covering any material or its use.

**Organic Division / 800 N. Lindbergh Blvd. / St. Louis, Missouri 63166**



TOWOLDMON0035887

# Table of Contents


GENERAL PHYSICAL PROPERTIES CHART . 4

ELECTRICAL APPLICATION OF AROCLOR . 7
- Dielectrics for Askarel Type Capacitors and Transformers . . . . . 7
- Impregnating Compounds . . . . . 7

MECHANICAL APPLICATIONS OF AROCLOR. 10
- Expansion Medium. . . . . 11
- Liquid Sealant for Furnace Roofs . . . . . 11
- Vacuum Diffusion Pump Oil . . . . . 11

AROCLOR IN SPECIAL PRODUCT FORMULATIONS . . . . . 12
- Sealers for Gaskets. . . . . 12
- Dedusting Agent . . . . . 12
- Insecticides . . . . . 12
- Precision Casting Waxes . . . . . 12
- Abrasives . . . . . 13
- Specialized Lubricants . . . . . 13
- Industrial Cutting Oils . . . . . 14


# Appendix


Methods for Emulsifying . . . . . 15
Solubility Table . . . . . 16
Vapor Pressure . . . . . 17
Vaporization Rates. . . . . 18
Corrosion Resistance of Structural Materials. . 19
Viscosity Table . . . . . 20
Density Table. . . . . 21
Dermatology & Toxicity. . . . . 22
Safe Handling . . . . . 23
Shipping Information. . . . . 23


*Ask your Man from Monsanto for additional Aroclor literature:*

Askarel Inspection and Maintenance Guide
Aroclor® Plasticizers Technical Bulletin
Therminol® FR Fluid Heat Systems Engineering Heat Transfer Data


Aroclor, Therminol, Sterox, Santomerse, Formvar, Lustron, and Resinox are registered trademarks of Monsanto Company.





0515198

TOWOLDMON0035888

## What are the Aroclor® Polychlorinated Polyphenyls

These compounds are a series of chlorinated biphenyls and chlorinated polyphenyls. They range in form and appearance from mobile oily liquids to fine white crystals and hard transparent resins. Aroclor is non-oxidizing, permanently thermoplastic, of low volatility, and non-corrosive to metals. Aroclor is not hydrolyzed by water, alkalis, or acids. The viscous liquids and resins will not support combustion when heated alone, and they impart fire-resistance to other materials.

Crystalline Aroclor is relatively insoluble, but the liquid and resinous compounds are soluble in most of the common organic solvents, thinners and oils. All Aroclor chlorinated compounds are insoluble in water, glycerine or the glycols. Aroclor 5460 is insoluble in the lower molecular weight alcohols; 4465 is only partly soluble in the lower alcohols.

Aroclor is used alone for a particular physical job, such as insulating, and as a sealant or expansion media. Aroclor is also used as a component or extender in elastomers, adhesives, paints, lacquers, varnishes, pigments and waxes. The properties imparted by Aroclor (and their usefulness in particular applications) vary in regular gradient over the series. Selection of the right Aroclor for a particular use can generally be made by comparison of the properties, by blending two or more, and by adjusting the percentage used in the particular mixture in which the Aroclor will be formulated.

The following table describes the properties of twelve Aroclor chlorinated compounds, each of which is representative of a series. For almost every Aroclor shown, there is a dark-colored grade of approximately the same physical and chemical characteristics. These darker products are less pure, but are lower in price.



TOWOLDMON0035889

# General Physical Properties of the Aroclor® Chlorinated Compounds

| | Aroclor 1221 | Aroclor 1232 | Aroclor 1242 | Aroclor 1248 | Aroclor 1254 |
|---|---|---|---|---|---|
| Form | Colorless mobile oil | Practically colorless mobile oil | Practically colorless mobile oil | Colorless to light yellow-green, clear, mobile oil | Light yellow viscous oil |
| Color | 50 Max. (APHA) | 50 Max. (APHA) | 50 Max. (APHA) | 50 Max. (APHA) | 50 Max. (APHA) |
| Acidity — Maximum (Mgm. KOH per Gm.) | 0.014 | 0.014 | 0.010 | 0.010 | 0.010 |
| Average Coefficient of Expansion....cc/cc/°C | 0.00071 (15°-40°C) | 0.00073 (25°-100°C) | 0.00068 (25°-65°C) | 0.00070 (25°-65°C) | 0.00066 (25°-65°C) |
| Typical Density | | | | | |
| Specific Gravity | 1.182-1.192 (25°/15.5°C) | 1.270-1.280 (25°/15.5°C) | 1.381-1.392 (25°/15.5°C) | 1.405-1.415 (65°/15.5°C) | 1.495-1.505 (65°. 15.5°C) |
| Pounds per gallon — 25°C(77°F) | 9.85 | 10.55 | 11.50 | 12.04 | 12.82 |
| Distillation Range — ASTM D-20 (Mod.) | | | | | |
| Corr. °C | 275°-320° | 290°-325° | 325°-366° | 340°-375° | 365°-390° |
| Evaporation Loss — % — ASTM D-6 Mod. | | | | | |
| 163°C....5 hrs. | — | — | 3.0 to 3.6 | 3.0 to 4.0 | 1.1 to 1.3 |
| 100°C....6 hrs. | 1.0 to 1.5 | 1.0 to 1.5 | 0.0 to 0.4 | 0.0 to 0.3 | 0.0 to 0.2 |
| Flash Point — Cleveland Open Cup....°C | 141°-150° | 152°-154° | 176°-180° | 193°-196° | None |
| °F | 286°-302° | 305°-310° | 348°-356° | 379°-384° | |
| Fire Point — Cleveland Open Cup....°C | 176° | 238° | None* | None | None |
| °F | 349° | 460° | | | |
| Pour Point — ASTM D-97....°C | Crystals at 1°C | −35.5° | −19° | −7° | 10° |
| °F | Crystals at 34°F | −32° | 2° | 19.4° | 50° |
| Softening Point — ASTM E-28....°C | — | — | — | — | — |
| °F | — | — | — | — | — |
| Refractive Index — D-line — 20°C | 1.617-1.618 | 1.620-1.622 | 1.627-1.629 | 1.630-1.631 | 1.639-1.641 |
| Viscosity — Saybolt Universal Sec. (ASTM — D-88) 210°F (98.9°C) | 30-31 | 31-32 | 34-35 | 36-37 | 44-48 |
| 130°F (54.4°C) | 35-37 | 39-41 | 49-56 | 73-80 | 260-340 |
| 100°F (37.8°C) | 38-41 | 44-51 | 82-92 | 185-240 | 1800-2500 |

*NONE indicates — "No fire point up to boiling temperature"

0515200



TOWOLDMON0035890

| Aroclor 1260<br>Light yellow<br>soft sticky<br>resin | Aroclor 1262<br>Light yellow<br>sticky clear<br>resin | Aroclor 1268<br>White to<br>off-white<br>powder | Aroclor 4465<br>Light-yellow,<br>clear, brittle<br>resin | Aroclor 5442<br>Yellow trans-<br>parent sticky<br>resin | Aroclor 5460<br>Clear, yellow-<br>to-amber,<br>brittle resin | Aroclor 2565<br>Black, opaque,<br>brittle resin |
|---|---|---|---|---|---|---|
| 50 max.<br>(APHA) | 50 Max.<br>(APHA) | 1.5 Max.<br>NPA (molten) | 2 Max.<br>NPA (molten) | 2 Max.<br>NPA (molten) | 2 Max.<br>NPA (molten) | — |
| 0.014 | 0.014 | 0.05 | 0.05 | 0.05 | 0.05 | 1.4 |
| 0.00067<br>(20°-100°C) | 0.00064<br>(25°-65°C) | 0.00067<br>(20°-100°C) | 0.00061<br>(25°-65°C) | 0.00123<br>(25°-99°C) | 0.00179<br>(25°-124°C) | 0.00066<br>(25°-65°C) |
| 1.555-1.566<br>(90°/15.5°C)<br>13.50 | 1.572-1.583<br>(90°/15.5°C)<br>13.72 | 1.804-1.811<br>(25°/25°C)<br>15.09 | 1.670<br>(25°/25°C)<br>13.91 | 1.470<br>(25°/25°C)<br>12.24 | 1.670<br>(25°/25°C)<br>13.91 | 1.734<br>(25°/25°C)<br>14.44 |
| 385°-420° | 395°-425° | 435°-450° | 230°-320°<br>at 4 mm. Hg. | 215°-300°<br>at 4 mm. Hg. | 280°-335°<br>at 5 mm. Hg. | — |
| 0.5 to 0.8<br>0.0 to 0.1 | 0.5 to 0.6<br>0.0 to 0.1 | 0.1 to 0.2<br>0.0 to 0.06 | 0.2 to 0.3<br>0.0 to 0.02 | 0.2<br>0.01 | 0.03<br>1.5 to 1.7<br>(at 260°—5 hrs.) | 0.2 to 0.3<br>— |
| None | None | None | None | 247°<br>477° | None | None |
| None | None | None | None | >350°<br>>662° | None | None |
| 31° | 35°-38° | — | — | 46° | — | — |
| 88° | 99° | — | — | 115° | — | — |
| — | — | 150° to 170°<br>(hold pt.) | 60° to 66° | 46° to 52° | 98° to 105.5° | 66° to 72° |
| — | — | 302° to 338°<br>(hold pt.) | 140° to 151° | 115° to 126° | 208° to 222° | 149° to 162° |
| 1.647-1.649 | 1.6501-1.6517 | — | 1.664-1.667 | — | 1.660-1.665 | — |
| 72-78 | 86-100 | — | 90-150<br>(266°F or 130°C) | 300-400 | — | — |
| 3200-4500 | 600-850<br>(160°F or 71°C) | — | — | — | — | — |
| — | — | — | — | — | — | — |



TOWOLDMON0035891

## RESISTANCE TO DRYING

Aroclor is non-drying. Even when exposed to air in the form of thin films, no noticeable oxidation or hardening takes place. However, when used as a component of paints, varnishes or lacquers, it does not retard the rate of drying of the films. Quick drying varnishes and paints can be made using Aroclor in the formulation.

## FIRE-RESISTANCE

Viscous, oil-like Aroclor and the Aroclor resins do not support combustion when heated alone, even at their boiling points — temperatures in excess of 350°C. Most of the Aroclor chlorinated compounds flux readily with other resinous and pitch-like materials to make mixtures that gain in fire retardance properties. Even when incorporated in nitro-cellulose films and rubber foams, Aroclor will retard the rate of burning.

## ADHESIVENESS AND THERMOPLASTICITY

The Aroclor resins adhere strongly to smooth surfaces such as glass, metal, varnished or lacquered coatings.

Aroclor is permanently thermoplastic. It apparently undergoes no condensation or hardening upon repeated melting and cooling. Clear Aroclor resins can be supplied with softening points up to 105°C. Opaque, crystalline Aroclor can be supplied with initial melting points up to approximately 290°F.

## STABILITY

*Toward Alkalies* — Aroclor is remarkably resistant to the action of either hydrolyzing agents or high temperature. It is not affected by boiling with sodium hydroxide solution.

*Toward Acids* — Experiments were made to determine whether hydrogen chloride is evolved during the treatment of Aroclor with sulfuric acid. Aroclor 1254 (selected as typical) was stirred with an equal volume of ten per cent sulfuric acid for a period of 150 hours. Any gases escaping from the reaction flask had to pass through a trap filled with silver nitrate solution, which would give a precipitate of silver chloride if any HCl came in contact with it. After 150 hours of treatment, neither the trap solution nor the acid layer in the treating flask showed any hydrogen chloride present.

Even prolonged treatment (255 hours) with concentrated sulfuric acid indicated negligible effect.

*Toward Heat* — Aroclor is a useful heat transfer media because of its stability to heat. Aroclor 1254 and particularly the less viscous Aroclor 1248 are recommended for this purpose because they may be heated at temperatures up to 315°C (600°F) in a closed system for long periods without appreciable decomposition and they are fire-resistant.

*Toward Oxidation* — When Aroclor is subjected to a bomb test at 140°C with 250 pounds oxygen per square inch, there is no evidence of oxidation as judged by development of acidity or formation of sludge.

## ELECTRICAL RESISTIVITY

Aroclor has extremely interesting electrical characteristics: high resistivity and dielectric strength and low power factor. The dielectric constant ranges from 3.4 to 5.0 at 100°C and 1000 cycles, depending upon the particular Aroclor.

## SOLUBILITY

All Aroclor chlorinated compounds are insoluble in water. They are soluble, however, in most of the common solvents, plasticizers, and resins.

The Aroclor oils and resins are readily soluble in most of the common organic solvents and drying oils. Hard crystalline Aroclor is in general less soluble than the liquid or softer Aroclor resins. Aroclor is heavier than water, a valuable property for many applications.



TOWOLDMON0035892

# Electrical Applications of Aroclor

Aroclor is one of the purest commercial chemical compounds, virtually free of even traces of conducting impurities. For this reason, dielectric properties of Aroclor closely approximate the theoretical maximum for these particular organic compounds. With its stability, heat-resistance and fire resistance — Aroclor can be used for a variety of heavy-duty dielectric applications.

## DIELECTRICS FOR ASKAREL TYPE CAPACITORS AND TRANSFORMERS

Aroclor is used per se in capacitors and is formulated for the liquid coolant-insulation fluids in transformers. Such dielectrics must be highly pure with dependably minimal traces of electrolytes. They must be chemically stable and non-corrosive to a wide variety of structural materials. Most important, the dielectric fluid must be fire-resistant.

Aroclor is the only liquid in low cost commercial supply that meets these exacting requirements.

Aroclor liquids 1242, 1248, 1254, and 1260 are used directly, or are carefully formulated with chlorinated benzene and other additives to make askarel fluid for particular needs. Typical formulated askarel fluids are shown on the following pages.

Aroclor liquids 1242 and 1254, themselves or in special formulations, are used as the dielectric in fixed paper capacitors, for the power factor correction in utility transmission lines; for home appliances such as air conditioners, furnaces, washers and driers; for electric motors; and for ballast in fluorescent fixtures. There are also a number of applications in DC systems, in condensers, and the new energy storage capacitors.

The Aroclor fluids can be used in a wide variety of applications requiring a specialized dielectric. Monsanto works closely with electrical equipment makers to develop the proper dielectric with the exact physical properties required by the engineering of the equipment.

## IMPREGNATING COMPOUNDS

Because of its nonflammability, high resistivity, dielectric strength and low power factor, liquid and resinous Aroclor is extremely useful as an impregnating compound. An important application of Aroclor in the electrical field is the use of Aroclor 1260, 4465, and 5460 in wire or cable coatings and as impregnants for cotton and asbestos braided insulation. Because they possess high purity and excellent electrical resistance, Aroclor 1254, 5460 and 1268 make superior dielectric sealants to close the pores of carbon resistors, and to seal electrical bushings and terminals.

To attain the lowest possible loss factor and gain resistivity, Aroclor is often treated with about 0.20% by weight of Attaupulgus clay or Fullers earth. To activate the earth it should be heated to 450°-500°F.

### ELECTRICAL PROPERTIES

| Aroclor | Dielectric Constant at 1,000 Cycles (1) 25°C | 100°C | Volume Resistivity (2) Ohm-cm at 100°C, 500 Volts D.C. | Dielectric Strength (3) | Power Factor (4) 100°C, 1,000 Cycles |
|---|---|---|---|---|---|
| 1232 | 5.7 | 4.6 | | | |
| 1242 | 5.8 | 4.9 | Above $500 \times 10^9$ | Greater than 35KV | <0.1% |
| 1248 | 5.6 | 4.6 | Above $500 \times 10^9$ | Greater than 35KV | <0.1% |
| 1254 | 5.0 | 4.3 | Above $500 \times 10^9$ | Greater than 35KV | <0.1% |
| 1260 | 4.3 | 3.7 | Above $500 \times 10^9$ | Greater than 35KV | <0.1% |
| 1268 | 2.5 | — | | | |
| 5442 | 3.0 | 4.9 | Above $500 \times 10^9$ | | |
| 5454 | 2.7 | 4.2 | | | |
| 5460 | 2.5 | 3.7 | | | |
| 4465 | 2.7 | 3.3 | | | |

(1) ASTM D-150-47T (2) ASTM D-257-46 (3) ASTM D-149-44 (4) ASTM D-150-47T



TOWOLDMON0035893

# TYPICAL TRANSFORMER ASKAREL

**(MIXTURE OF AROCLOR AND CHLOROBENZENES)**

| Property | Typical |
|---|---|
| Visc. @ 37.8°C. (ASTM D88) | 41-45 Sec. Saybolt Univ. |
| Spec. Gravity @ 15.5/15.5°C., (ASTM D287) | 1.563-1.571 |
| Color, APHA | 150 max. |
| Condition | Clear |
| Acidity, mg. KOH/g. | 0.01 max. |
| Pour Pt., °C., (ASTM D97) | −44°C., or lower |
| Inorganic Chlorides, ppm | 0.10 max. |
| Refractive Index @ 25°C. | 1.6075-1.6085 |
| Distillation Range (ASTM D20) Corrected for stem and barometric pressure | |
| First drop | 210°C., min. |
| 35% | 240-256°C. |
| 55% | 290-330°C. |
| 65% | 385-400°C. |
| 95% | 395-415°C. |
| Corrosion | After heating with aluminum for 6 hrs. @ 200-220°C., the aluminum must not be corroded either on visual or weight inspection. |
| | The askarel fluid meets the following specifications: |
| | Color, APHA — 200 max. |
| | Acidity, mg. KOH/g. — 0.01 max. |
| | Inorg. Chlorides, ppm — 5 max. |
| | Condition — Clear |
| Water Content, ppm. | 30 max. |
| Resistivity, 100°C., 500v., 0.1" gap | 100 x $10^9$ ohm-cm., min. |
| Dielectric Strength, 25°C. | 35 KV., min. |
| Dielectric Constant, 100°C., 1000 cycles* | 3.8-4.2 |
| Tin Tetraphenyl* | 0.125% ± 0.01% by weight |
| Burn Point, (ASTM D92)* | None up to Boiling Point |
| Fixed Chlorine* | 60.5 ± 0.5 |
| Arc Formed Gases* (Oxygen Free Liquid @ 25°C.) | Total combustible gases including carbon monoxide, hydrogen and volatile hydrocarbons. |
| Electrical Stability* | After heating for 96 hours @ 100°C in a closed container, the resistivity should not decrease more than 10%. |

*Determined by special request.



0515204

TOWOLDMON0035894

# TYPICAL CAPACITOR AROCLOR

| Property | Typical |
|---|---|
| Visc. @ 37.8°C. (ASTM D88) | 82-92 seconds Saybolt Univ. |
| Specific Gravity @ 25/15.5°C (ASTM D287) | 1.381-1.392 |
| Color, APHA | 50 max. |
| Condition | Clear |
| Acidity, mg. KOH/g. | 0.01 max. |
| Pour Pt., °C. (ASTM D97) | −14 or lower |
| Inorganic Chlorides, ppm | 0.10 max. |
| Refractive Index @ 25°C. | 1.6240-1.6260 |
| Distillation Range (ASTM D20) Corrected for stem and barometric pressure | 10% 325°C. min.<br>90% 360°C. max. |
| Corrosion | After heating with aluminum for six hours at 210°C ± 10°C the aluminum must not be corroded either on visual or weight inspection and the Aroclor 1242 should meet the following specs.:<br>Color, APHA 60 max.<br>Acidity, mg. KOH/g. 0.01 max.<br>Inorg. Chlorides, ppm 0.10 max.<br>Condition Clear |
| Water Content, ppm | 35 max. |
| Resistivity 100°C. 500 volts DC @ 0.1" gap | 500 x $10^9$ ohm-cm., min. |
| Dielectric Constant 100°C. @ 1000 cycles (ASTM D924) | 4.7-4.9 |
| Flash Point Cleve. Open Cup* | 170°C., min. |
| Fire Point °C.* | None to boiling point |
| Sulfates (ASTM-D117-31)* | None |
| Fixed chlorine content (Carius)* | 41.5-42.5% |
| Specific Heat @ 25°C.* | 0.29 |
| Evaporation @ 100°C for 6 hrs.* | 0.4% max. |
| Dielectric Strength (KV) (ASTM D877)* | 35 Min. |

*Determined by special request.

## DIELECTRIC CONSTANT VS. TEMPERATURE
## Aroclor® 1242 & Aroclor® 1254

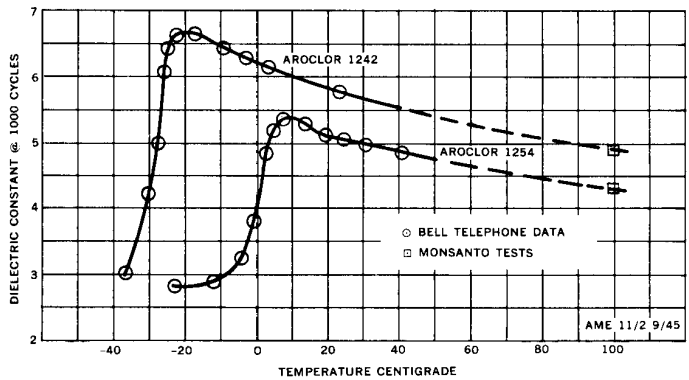


COURTESY OF THE JOURNAL OF FRANKLIN INSTITUTE AND BELL TELEPHONE LABORATORIES



TOWOLDMON0035895

# Mechanical Applications of Aroclor

Because Aroclor chlorinated compounds have excellent shear resistance, heat stability, and are chemically stable . . . they can serve in dozens of mechanical applications for transferring mechanical power, heat and variable pressures. Aroclor does not attack metals even at high temperature; it resists oxidation, chemical and mechanical breakdown under a wide variety of environmental conditions. Aroclor liquids used as lubricants impart a high degree of extreme pressure lubricity.

**HEAT CAPACITY OF AROCLOR® LIQUIDS**
**at Various Temperatures**

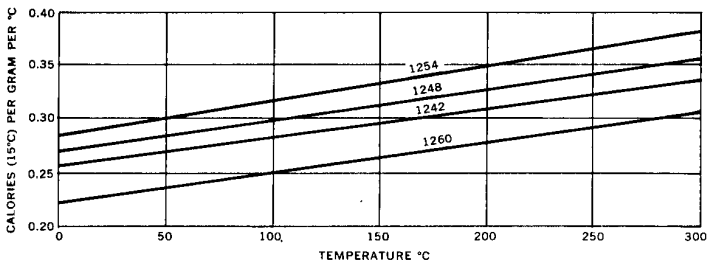


**THERMAL CONDUCTIVITY OF AROCLOR 1248**

| Temperature °C. | Temperature °F. | BTU./Hr./Sq. Ft./°F./Ft. | Calories, gram/Sec./Sq.Cm./°C./Cm. |
|---|---|---|---|
| 30 | 90 | 0.0680 | 281 x $10^{-6}$ |
| 60 | 140 | 0.0687 | 284 x $10^{-6}$ |
| 100 | 212 | 0.0697 | 288 x $10^{-6}$ |

0515206



TOWOLDMON0035896

## EXPANSION MEDIUM

Because of their stability at high temperatures and ability to withstand frequent temperature cycles without gum formation, Aroclor liquid is used as the actuating medium in bellows controls, thermostats, industrial temperature control regulators and other kinds of automation equipment.

The average coefficient of expansion of Aroclor 1248 per degree F within the various temperature ranges indicated in the table below was determined by using the simple formula $Vt = Vt^1 [1 + a (t - t_1)]$. The coefficient a, has been calculated at 100°F increments as follows:

| Temp. Range °F | Average Coefficient of Expansion cc/cc/F |
|---|---|
| 0 to 100 | 0.00037 |
| 100 to 200 | 0.00039 |
| 200 to 300 | 0.00040 |
| 300 to 400 | 0.00046 |
| 400 to 500 | 0.00048 |
| 500 to 600 | 0.00051 |

The specific volume of Aroclor 1248 at different temperatures is as follows:

| Temp. °F | Specific Volume ml/gm |
|---|---|
| 0 | 0.674 |
| 100 | 0.699 |
| 200 | 0.726 |
| 300 | 0.755 |
| 400 | 0.790 |
| 500 | 0.828 |
| 600 | 0.870 |

## LIQUID SEALANT FOR FURNACE ROOFS

Because of their low vapor pressures and fire-resistance, Aroclor 1248 and 1254 make excellent liquid sealants. These non-evaporating fluids have good flow at slightly elevated temperatures and are chemically stable at elevated temperatures.

Consequently, Aroclor liquid makes excellent fluid sealants for any application where the use of oil would create a fire hazard. In the trough of annealing furnaces, for example, Aroclor makes dependable fire-safe roof seals.

## VACUUM DIFFUSION PUMP OIL

Fluid Aroclor 1248 and 1254 are highly stable to air; they make good oils for vacuum pumps at a much lower cost than high priced silicone type oils. Aroclor operates efficiently in vacuum diffusion pumps used to pull high vacuum for metalizing plastics, dehydrating foods, medicinals, and for drying capacitor cones.



TOWOLDMON0035897

# Aroclor in Special Product Formulations

With their wide range of physical properties, their inertness, lubricity, and vapor-suppressing characteristics — Aroclor chlorinated compounds can be valuable ingredients in an extraordinary variety of formulated products. They are compatible with a variety of solvents, oils and resins. Virtually non-volatile and permanently thermoplastic, they will not react with other chemicals in the formulation. In addition, their low cost makes their use for special purposes eminently practical and economical.

## SEALERS FOR GASKETS

Aroclor — particularly when hot — swells rubbers like Hycar*, Koroseal*, PerBuna N, and Neoprene. Wherever seals and gaskets of natural or synthetic rubber tend to shrink under heat and use, Aroclor 1232, 1242, or 1254 can be used as a swelling agent to tighten the shrunken seal. An example is in automotive transmission oil: a small amount of Aroclor in the oil swells the seal in place, saving the cost of tearing down the equipment to replace the seal or gasket. Aroclor can be used in gasket sealing compounds to swell the rubber after the gasket or seal is in place.

## DEDUSTING AGENT

Aroclor 1254 is a low cost dedusting agent which can hold down the dusting of a variety of chemical products. Because Aroclor 1254 resists both combustion and oxidation, it can be used to control dusting of highly reactive compounds. As a typical example,(1) a few tenths of one percent will control the dusting of calcium hypochlorite.

*Hycar and Koroseal are registered trademarks of B. F. Goodrich Co.

(1) Covered by U. S. Patent No. 2,921,911, issued January 19, 1960, and assigned to Pennsalt Chemicals Corporation.

## INSECTICIDES

Aroclor 5460 and 1254 act as vapor suppressants. United States Department of Agriculture scientists reported that the inclusion of from 5 to 25 parts per hundred by weight of Aroclor increased the effective kill-life of a lindane spray up to ten times. A painted or metallic surface sprayed with certain chlorinated insecticides fortified with Aroclor will remain toxic to flies, ants, roaches and silverfish up to 2 to 3 months. The Aroclor resins suppress the rapid evaporation of the volatile insecticides without adding odor or other objectionable residue. Formulation into insecticides is quite simple; the Aroclor is dissolved in a suitable solvent compatible with the insecticide formulation, and mixed in. The most pronounced effect for increasing the kill-life of the insecticide is obtained with lindane, chlordane and BHC. Aroclor is recommended for chlorinated insecticide formulations to be used for non-crop spraying. Their low cost makes this use a most practical way to lower the ultimate cost of insect control.

## PRECISION CASTING WAXES

Aroclor is compatible with various natural waxes, such as carnauba and others, including those used to formulate casting wax. Aroclor helps impart to the finished casting wax a number of desirable properties: hardness without brittleness; resistance to shrinking; sharp definition; sharp melting point; and fire-resistance. Waxes formulated with Aroclor are non-tacky and highly stable. Waxes containing Aroclor are widely used in making dental castings, in the precision casting of aircraft parts, and for casting costume jewelry. Aroclor 1254, 4465 and 5460 are most frequently used . . . proportions dependent upon the properties re-



0515208

TOWOLDMON0035898

quired in the finished wax. Much of the highest quality precision casting wax used in the lost wax process is formulated with Aroclor.

## AROCLOR IN ABRASIVES

Aroclor 1254, 1268 and 5460 are used in the manufacture of specialized abrasives. Because of their excellent bonding characteristics, high thermal stability and resistance to oxidation and corrosion — Aroclor is used as the carrier for abrasive materials. A major use is as part of the bonding agent in specialized grinding wheels.

## AROCLOR IN SPECIALIZED LUBRICANTS

For specialized lubricants requiring good extreme pressure (EP) characteristics, the Aroclor liquids make excellent additives. They impart high temperature stability, excellent lubricating qualities, and weather and corrosion resistance. As an example, Aroclor is used to formulate grease and pipe thread compounds for use in oxygen systems. Greases formulated with Aroclor have a high chemical resistance and are suitable for use in contact with corrosive chemicals. Gear oil lubricants containing Aroclor have good resistance to sheer degradation and high temperature stability. Added in small amounts to railroad car journal box oils, Aroclor imparts better extreme pressure lubricity and reduces the incidence of hot boxes.

The heat-resisting, nonflammable characteristics of the Aroclor chlorinated compounds make them attractive in themselves as lubricants under conditions of high temperature. As an example: in governor systems of central power stations, Aroclor 1248 is well suited to this lubricating application.

Straight Aroclor 1254 gives excellent results on a roller bearing test operating at 255-260°F with much less carbonization or decomposition than the usual spindle oil under the same conditions.

As an extreme pressure (EP) lubricant base added to a petroleum hydrocarbon oil in amounts up to approximately 15% by weight, Aroclor 1248 and 1254 materially increase the load-carrying properties without reducing the viscosity of the resulting composition. These two compounds represent one of the more satisfactory carriers for the element chlorine as an extreme pressure base, possessing the following advantages:

1. STABILITY. Even at higher temperatures, there will be neither separation of components nor appreciable change in physical or chemical properties during long periods of operation.
2. NON-VOLATILE. Many other types of chlorine bearing compounds are so volatile as to render them unfit for long periods of service. Aroclor is non-volatile at normal temperatures.
3. NON-OXIDIZING. Aroclor does not oxidize nor thicken up to an objectionable degree.
4. NON-CORROSIVE. Aroclor does not attack metal surfaces.
5. NON-ABRASIVE. Aroclor exerts no abrasion on the machined surfaces.
6. NON-HYDROLYSIS. Aroclor does not hydrolyze in the presence of water, thus avoiding the generation of hydrochloric acid.
7. COMPATIBILITY. Aroclor is completely miscible with mineral oils.
8. COLOR. Aroclor does not darken or change the color of lubricating oil.



TOWOLDMON0035899

Where lubrication is subjected to water displacement exposure, for example in the lubrication of bridge rollers, a heavier-than-water lubricant can be prepared from mixtures of Aroclor and oil. The following are typical examples:

| Mix No. | % by weight Oil* | % by weight Aroclor 1248 | Pour Pt. | Gravity at 15.5°C. | Approx. Pounds/Gal. |
|---|---|---|---|---|---|
| 1 | 50 | 50 | 0°F | 1.1263 | 9.4 |
| 2 | 25 | 75 | +5°F | 1.2703 | 10.6 |

Viscosity 210°F-160 Saybolt Secs.
Color ASTM 7-8
Flash Point 545°F.
Pour Point 15°F.

*Bright Stock: Gravity API 22-23

## AROCLOR IN INDUSTRIAL CUTTING OILS

Aroclor 1254 is used to formulate the finest quality straight and soluble or emulsifiable-type cutting oils. The Aroclor functions as an excellent extreme-pressure lubricant and is far superior to aliphatic chlorinated hydrocarbons because of its higher order of thermal stability. The heat resistance is most important in cutting oils for machining high grade steel. With Aroclor cutting oils there is a lower degree of hydrolysis which minimizes the staining of the metal.

0515210



TOWOLDMON0035900

# Appendix

## Methods for Emulsifying and Making Stock Solutions of Aroclor

There are several simple methods for making Aroclor emulsions; the one used may be selected to suit the kind of Aroclor and type of formulation in which it will be used.

**Emulsifying Viscous Aroclor**

| | |
|---|---|
| (Portion 1) | 16 lbs. of Aroclor |
| | 1 lb. of stearic acid |
| (Portion 2) | 8 lbs. of water |
| | 4 oz. Triethanolamine |

Heat the Aroclor to a workable viscosity (180°F plus) and stir in the stearic acid thoroughly. Heat the water to almost boiling (207°F) and stir in the triethanolamine thoroughly. Pour the Aroclor stearic acid portion into the water portion, agitating vigorously. Then process the combined portions with a highspeed emulsifying stirrer . . . or process through a colloid mill.

**Emulsifiable Concentrated Stock Solutions of Aroclor**

79 parts of Aroclor
16.70 parts of toluene
3.55 parts of isopropyl alcohol
1.00 parts of Sterox® CD non-ionic emulsifier
0.75 parts of Santomerse® anionic wetting agent

The above formulation is readily emulsifiable with water. If a more resinous Aroclor is used, increase the amount of toluene (or xylene) as needed to dissolve the Aroclor resin.



TOWOLDMON0035901

## SOLUBILITY OF AROCLOR® CHLORINATED COMPOUNDS IN 100 MILLILITERS OF VARIOUS SOLVENTS

| Aroclor / Type of Solvent | 1242 25°C | 1242 Hot | 1248 25°C | 1248 Hot | 1254 25°C | 1254 Hot | 1270 Cold | 1270 Hot | 4465 Cold | 4465 Hot | 5460 25°C |
|---|---|---|---|---|---|---|---|---|---|---|---|
| **Acid** | | | | | | | | | | | |
| Acetic Acid | S | S | — | — | S | S | — | — | SS | S | — |
| Oleic Acid | S | S | — | — | S | S | — | — | S | VS | — |
| Benzoic Acid | 10.0 31°C | — | 10.0 32°C | — | — | — | — | — | — | — | — |
| **Aldehyde** | | | | | | | | | | | |
| 40% Formaldehyde | I | I | I | I | I | I | I | I | I | I | — |
| Furfural | VS | VS | VS | VS | VS | VS | SS | SS | VS | VS | — |
| **Amine** | | | | | | | | | | | |
| Aniline | S | S | — | — | S | S | — | — | VS | VS | — |
| Pyridine | 132.5 30°C | 440 99°C | — | — | 114 31°C | 425 100°C | — | — | VS | VS | — |
| **Chloro — derivatives** | | | | | | | | | | | |
| Amyl chlorides—mixed | S | S | S | S | S | S | — | — | VS | VS | — |
| Carbon Tetrachloride | S | S | S | S | S | S | 3.7 | — | VS | VS | 156 |
| Chloroform | S | S | S | S | S | S | — | — | VS | VS | — |
| Dichlorethylene | — | — | — | — | — | — | 3.0 | — | VS | VS | — |
| Ethylene Dichloride | S | S | S | S | S | S | — | — | VS | VS | — |
| Monochlorobenzene | S | S | S | S | S | S | 2.9 | — | VS | VS | — |
| Orthodichlorobenzene | — | — | — | — | — | — | — | — | VS | VS | — |
| Tetrachlorethane | S | S | S | S | S | S | — | — | VS | VS | — |
| Trichlorethane | S | S | S | S | S | S | 3.3 | — | VS | VS | — |
| Trichlorethylene | S | S | S | S | S | S | — | — | VS | VS | — |
| **Drying Oil** | | | | | | | | | | | |
| Tung Oil | S | S | S | S | S | S | — | — | VS | VS | — |
| Linseed Oil | S | S | S | S | S | S | — | — | VS | VS | — |
| **Ester** | | | | | | | | | | | |
| Amyl Acetate | S | S | S | S | S | S | — | — | VS | VS | — |
| Butyl Acetate | S | S | S | S | S | S | — | — | VS | VS | — |
| Cellosolve Acetate | S | S | S | S | S | S | — | — | VS | VS | — |
| Cottonseed Oil | S | S | S | S | S | S | — | — | S | VS | — |
| Dibutyl Phthalate | S | S | S | S | S | S | — | — | S | VS | — |
| Diethyl Phthalate | S | S | S | S | S | S | — | — | S | VS | — |
| Ethyl Acetate | S | S | S | S | S | S | — | — | S | VS | — |
| Ethyl Lactate | S | S | S | S | S | S | — | — | VS | VS | — |
| Ethylene Glycol Diacetate | S | S | S | S | S | S | — | — | VS | VS | — |
| Methyl Acetate | S | S | S | S | S | S | — | — | S | S | — |
| Tricresyl Phosphate | S | S | S | S | S | S | — | — | SS | S | — |
| **Ether: Ethyl Ether** | S | S | S | S | S | S | S | S | S | — | — |
| **Ether Alcohol** | | | | | | | | | | | |
| Carbitol* | 224 31°C | 307 99°C | VS | VS | 173 26°C | 259 98°C | — | — | SS | — | — |
| Cellosolve | S | S | S | S | S | S | — | — | S | — | — |
| Diethylene Glycol | — | — | — | — | — | — | — | — | S | — | — |
| p-p' Dihydroxy Ethyl Ether | 16.9 23°C | 19 99°C | SS | SS | 8 30°C | 10 100°C | — | — | SS | — | — |
| **Hydrocarbon** | | | | | | | | | | | |
| Benzene | VS | VS | VS | VS | VS | VS | 3.5 | — | VS | VS | 143 |
| Gasoline | VS | VS | VS | VS | VS | VS | — | — | VS | VS | — |
| Kerosene | VS | VS | VS | VS | VS | VS | — | — | VS | VS | — |
| Mineral Spirits | VS | VS | VS | VS | VS | VS | — | — | VS | VS | — |
| Paraffin | 2.0 27.5°C | S | 2.0 28°C | S | — | S | — | — | <5.0 | S | — |
| Pine Oil | S | S | VS | VS | S | S | — | — | S | S | — |
| Toluene | VS | VS | VS | VS | VS | VS | — | — | VS | VS | 142 |
| Turpentine | VS | VS | VS | VS | VS | VS | — | — | VS | VS | — |
| Xylene | VS | VS | VS | VS | VS | VS | — | — | VS | VS | 178 |
| **Hydroxy—derivatives** | | | | | | | | | | | |
| Amyl Alcohol | S | S | — | — | S | S | — | — | S | S | — |
| n-Butyl Alcohol | S | S | — | — | S | S | — | — | SS | S | — |
| Ethyl Alcohol (3-A) | 23.3 29°C | 80.0 70°C | — | — | 10 27°C | 28 75°C | — | — | SS | — | — |
| Glycerine | I | I | I | I | I | I | I | I | I | I | — |
| Methyl Alcohol | 42.5 29°C | 88.5 60°C | — | — | 15 26°C | 22.2 65°C | — | — | SS | — | — |
| Phenol—90% | 194 30°C | S | — | — | SS | S | — | — | S | S | — |
| **Ketone** | | | | | | | | | | | |
| Acetone | S | S | — | — | S | S | — | — | S | S | 260 |
| **Miscellaneous** | | | | | | | | | | | |
| Carbon Disulfide | S | S | — | — | S | S | — | — | VS | VS | — |
| Nitrobenzene | S | S | — | — | S | S | — | — | VS | — | — |
| Water | I | I | I | I | I | I | I | I | I | I | — |

I — Insoluble S — Soluble SS — Slightly Soluble VS — Very Soluble
Figures show grams of Aroclor per 100 milliliters of solvent at 25°C unless otherwise indicated.

*Carbitol is a registered trademark of Union Carbide and Carbon Co.



0515212

TOWOLDMON0035902

## VAPOR PRESSURE OF AROCLOR® CHLORINATED COMPOUNDS

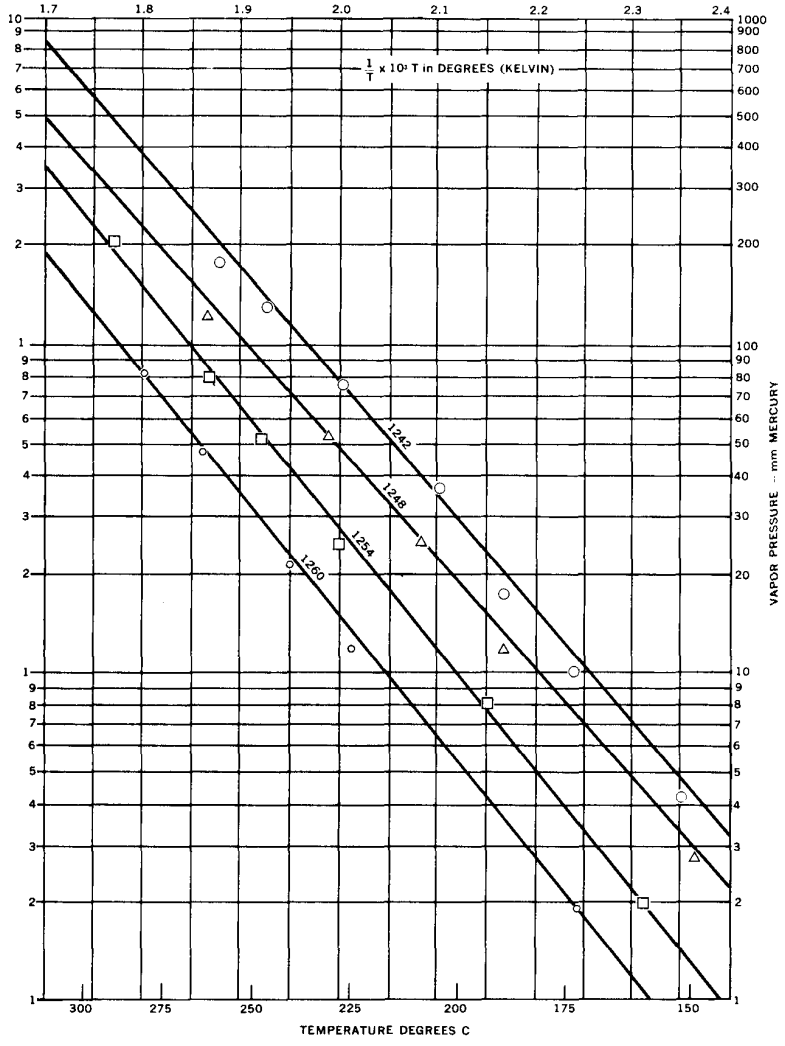




TOWOLDMON0035903

## VAPORIZATION RATES

| Sample | Wt. Loss Gms. | Hours Exposure | Surface Area Cm.² | Vaporization Rate gms./cm.²hr./100°C |
|---|---|---|---|---|
| Aroclor® 1221 | 0.5125 | 24 | 12.28 | 0.00174 |
| Aroclor 1232 | 0.2572 | 24 | 12.28 | 0.000874 |
| Aroclor 1242 | 0.0995 | 24 | 12.28 | 0.000338 |
| Aroclor 1248 | 0.0448 | 24 | 12.28 | 0.000152 |
| *42% chlorinated paraffin* | 0.0745 | 48 | 12.28 | 0.000126 |
| dioctyl phthalate | 0.0686 | 48 | 12.28 | 0.000117 |
| Dutrex* 25 | 0.0256 | 24 | 12.28 | 0.000087 |
| Aroclor 1254 | 0.0156 | 24 | 12.28 | 0.000053 |
| Dutrex 20 | 0.0047 | 24 | 12.28 | 0.000016 |
| Aroclor 1262 | 0.0039 | 24 | 12.28 | 0.000013 |
| Aroclor 1260 | 0.0026 | 24 | 12.28 | 0.000009 |
| Aroclor 4465 | 0.0064 | 72 | 12.28 | 0.000007 |
| Aroclor 1270 | 0.0045 | 72 | 12.28 | 0.000005 |
| Aroclor 5442 | 0.0039 | 72 | 12.28 | 0.000004 |
| Aroclor 5460 | 0.0032 | 72 | 12.28 | 0.000004 |
| Tricresyl phosphate | 0.0010 | 24 | 12.28 | 0.000003 |

*Dutrex is a registered trademark of the Shell Oil Co.

## APPROXIMATE VAPOR PRESSURES
## CALCULATED AT 100° F (37.8° C)

| | |
|---|---|
| Aroclor® 1232 | 0.005 mm. Hg. |
| Aroclor 1242 | 0.001 mm. Hg. |
| Aroclor 1248 | 0.00037 mm. Hg. |
| Aroclor 1254 | 0.00006 mm. Hg. |

0515214



TOWOLDMON0035904

## CORROSION RESISTANCE OF STRUCTURAL MATERIALS

| Metals | Aroclor Number 1248 25°C | 1248 125°C | 1254 25°C | 1254 125°C | 4465 125°C | 5460 125°C |
|---|---|---|---|---|---|---|
| Aluminum | R | R | R | R | *RR | RR |
| Copper | R | D | R | D | D | D |
| Magnesium | RR | R | R | R | RR | *RR |
| Nickel | RR | R | R | RR | RR | R |
| Silver | R | R | R | R | R | R |
| Tin | R | R | R | R | R | R |
| Zinc | R | R | R | R | R | RR |
| Mild Steel | RR | R | RR | RR | R | RR |
| Phosphor Bronze | R | D | R | R | R | R |
| Red Brass | D | D | R | D | R | De |
| Stainless Steel (Type 316) | RR | RR | RR | RR | RR | RR |
| Yellow Brass | R | Re | R | De | Re | Re |
| Plastics | | | | | | |
| Alkyd Resin No. 46594-12 | *P | P | *P | P | P | P |
| Alkyd Resin No. 46594-13A | *D | P | *D | P | P | P |
| Cellulose Acetate (Fibestos) | D | P | D | P | P | P |
| Durite[1] Phenol Furfural Resin | *D | P | *R | P | D | P |
| Formvar® Highly Plasticized polyvinyl formal resins | De | T | Pe | T | T | T |
| Formvar® Low Plasticized polyvinyl formal resins | PS | T | PS | T | T | T |
| Glyptal 1276 | R | P | D | P | P | P |
| Glyptal 7136 | *D | T | *R | T | T | T |
| Maleic Resin No. 46594-13B | P | P | *P | P | P | P |
| Maleic Resin No. 46594-13C | P | P | *R | P | P | P |
| Methyl Methacrylate | *D | P | *D | P | P | P |
| Lustron® B Polystyrene | P | T | P | T | T | T |
| Resinox® Mineral Filled Melamine Resin | *D | *P | *R | R | *P | *D |
| Resinox Wood Flour Filled Melamine Resin | *D | P | *R | D | R | P |
| Resinox Mineral Filled Phenol Formaldehyde | *D | D | *D | D | R | P |
| Resinox Wood Flour Filled Phenol Formaldehyde | *D | P | *D | *R | D | P |
| Resinox Rag Filled Phenol Formaldehyde | *D | D | *D | *D | *D | P |
| Urea Formaldehyde Resin (Plaskon Co.) | *D | P | *D | *P | P | P |

Meaning of Abbreviations:
* — Based on weight gain calculated as penetration value shown.
RR — Excellent resistance — less than $1.0 \times 10^{-4}$ cm/day penetration or .00014 in/yr.
R — Good resistance — has penetration between $1.0 \times 10^{-4}$ and $10 \times 10^{-4}$ cm/day or between 0.00014 and 0.0014 in/yr.
D — Doubtful resistance, penetration between $10 \times 10^{-4}$ cm/day and $100 \times 10^{-4}$ cm/day or between 0.0014 and 0.014 in/yr.
P — Poor resistance — penetration greater than $100 \times 10^{-4}$ cm/day or 0.014 in/yr.
PS — Poor resistance due to visible local action although weight change indicates greater resistance.
e — Following the letter indicating resistance signifies material may be better than indicated if totally immersed since weight loss is believed to come from oxidation of the part of test strip exposed to air.
T — Material alone will not stand temperature.
(1) Durite is a registered Trademark of Borden Chemical Co.

0515215



TOWOLDMON0035905

## VISCOSITY RANGES OF SOME OF THE AROCLOR® CHLORINATED COMPOUNDS

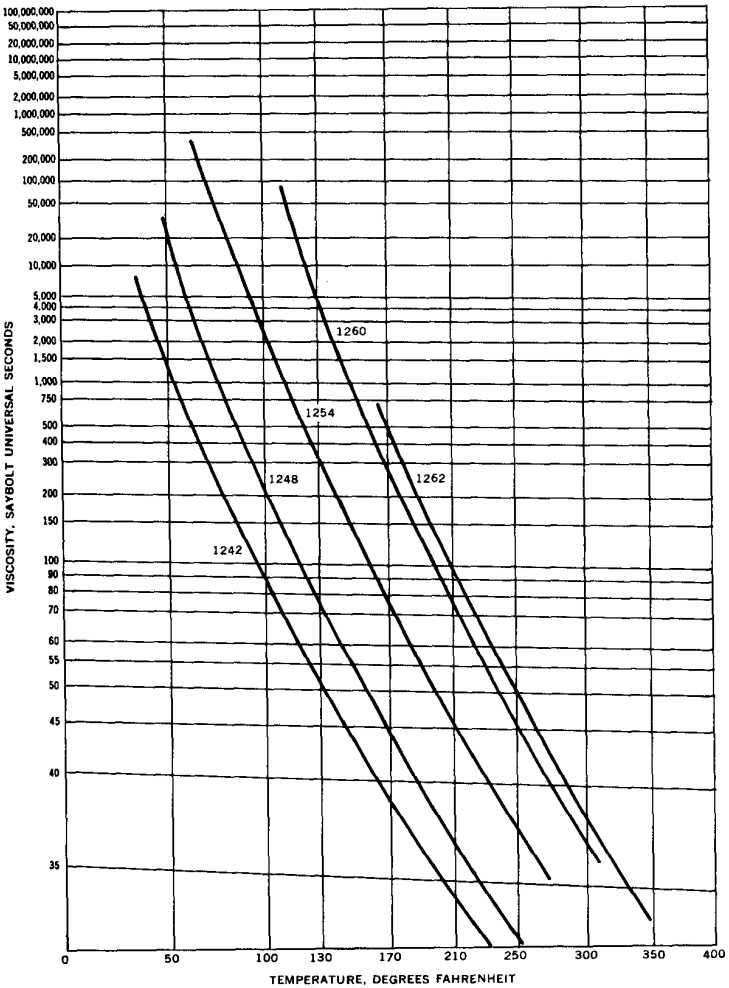


0515216



TOWOLDMON0035906

## DENSITIES OF AROCLOR® CHLORINATED COMPOUNDS AT VARIOUS TEMPERATURES

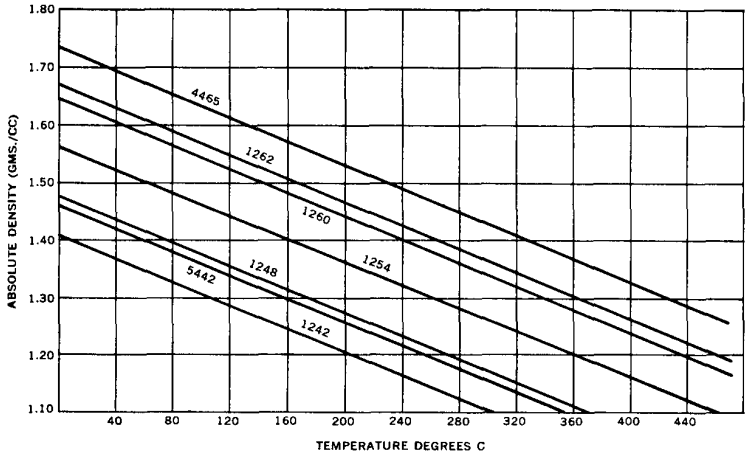




TOWOLDMON0035907

## Dermatology and Toxicology

At ordinary temperatures the Aroclor polychlorinated polyphenyls have not presented industrial toxicological problems. The hazard of potential toxic exposure varies with their volatility: the lower-chlorinated ones, being more volatile, present more of a potential problem from the standpoint of both inhalation and skin contact. When Aroclor is used at elevated temperatures, engineering controls must be applied, either by the use of closed systems or by effective local-exhaust ventilation together with general workroom exhaust.

Inhalation tests on animals indicate that the maximum safe concentration of vapor is in the range of 0.5 to 1.0 milligram of the lower-chlorinated Aroclor compounds per cubic meter of air. The threshold limits (maximum allowable concentration for an 8-hour working day) set by the American Conference of Government Hygienists are 1.0 milligram of the lower-chlorinated Aroclor compounds per cubic meter of air and 0.5 milligram of the more-highly-chlorinated compounds, such as Aroclor 1254, per cubic meter of air.

Schwartz patch tests on 200 volunteers showed that neither Aroclor 1254 alone when applied to gauze nor a polyvinyl chloride film containing 11.5-weight-per cent Aroclor 1254 was a primary irritant or a sensitizer. Canvas coated with an oil-modified alkyd resin (17-weight-per cent of the paint-film solids and 7-weight-per cent of the painted fabric was Aroclor 5460) did not produce primary skin irritancy or sensitization according to the same Schwartz technique. Continuous or repeated skin contact with Aroclor must be avoided because of the possible occurence of a condition called chlorance. Although reports of this condition caused by Aroclor are rare, it can be produced by excessive skin contact.



0515218

TOWOLDMON0035908

## Safe Handling

Vapors of the Aroclor liquids at room temperature should not be breathed in a confined space. Vapors evolved at elevated temperatures should not be allowed to be dispersed into the general workroom. Instead, engineering control must be applied to reduce vapor concentrations below the allowable concentrations mentioned above.

Continuous or repeated skin contact with Aroclor must be avoided by the use of gloves and protective garments. If any Aroclor is spilled on the skin, the skin should be washed in the usual manner with a soap solution.

A burn caused by contact with a hot Aroclor should be treated like any ordinary burn. Aroclor adhering to the burned area need not be removed immediately, unless treatment of the burn demands it, in which case either soap and water or repeated washings with a vegetable oil are recommended.

## Shipping Information

| | |
|---|---|
| **Freight Classification** | |
| AROCLOR 1221, 1243, 1242, 1248, 1254, 1260, 1262 | Synthetic Resin, Liquid, NOIBN |
| **Rail Classification** | |
| AROCLOR 1268, 2565, 4465, 5442, 5460 | Synthetic Resin, Other Than Liquid, NOIBN |
| **Truck Classification** | |
| AROCLOR 1268, 2565 | Synthetic Resin, Powder, NOI |
| AROCLOR 4465, 5442, 5460 | Synthetic Resin, Lumps or Solid Mass, NOI |
| **Shipping Regulations** | None |
| **Standard Containers** | |
| AROCLOR 1221 | Tank car, 520-lb. steel drum, 50-lb. can |
| AROCLOR 1232 | Tank car, 550-lb. steel drum, 50-lb. can |
| AROCLOR 1242, 1248, 1254, 1260, 1262 | Tank car, 600-lb. steel drum, 50-lb. can |
| AROCLOR 1268 | 200-lb. fiber drum, 50-lb. can |
| AROCLOR 2565, 4465 | 500-lb. steel drum, 50-lb. can |
| AROCLOR 5442 | 450-lb. steel drum, 50-lb. can |
| AROCLOR 5460 (flaked) | 100-lb. bag |

0515219



TOWOLDMON0035909

## DISTRICT SALES OFFICES
## ALL DIVISIONS

*ATLANTA, GEORGIA 30326*
*Lenox Towers West,*
*3390 Peachtree Rd. N.E.*
*Tel. (404) 231-4320*

*BOSTON, MASSACHUSETTS 02149*
*Everett Station*
*Tel. (617) Dunkirk 7-5010*

*CHICAGO, ILLINOIS*
*3158 Des Plaines Ave.*
*Des Plaines, Illinois 60018*
*Tel. (312) 296-6688*

*CINCINNATI, OHIO 45206*
*1501 Madison Road*
*Tel. (513) 751-6707*

*CLEVELAND, OHIO 44122*
*3645 Warrensville Center Rd.*
*Tel. (216) 991-5400*

*DETROIT, MICHIGAN 48235*
*500 Northland Towers*
*Tel. (313) 357-0910*

*HOUSTON, TEXAS 77002*
*1300 Main Street*
*Tel. (713) Capitol 3-4011*

*LOS ANGELES, CALIFORNIA 90022*
*6670 E. Flotilla St.*
*Tel. (213) Raymond 3-2492*

*MINNEAPOLIS, MINNESOTA 55402*
*912 Northstar Center 110 S. Seventh St.*
*Tel. (612) Federal 9-4651*

*NEW YORK, NEW YORK 10017*
*277 Park Avenue*
*Tel. (212) 922-4111*

*PITTSBURGH, PENNSYLVANIA 15222*
*No. 4 Gateway Center Bldg. Room 1406*
*Tel. (412) 261-2156*

*ST. LOUIS, MISSOURI 63166*
*800 N. Lindbergh Blvd.*
*Tel. (314) Wydown 3-1000*

*SAN FRANCICSO BAY AREA*
*2710 Lafayette, Santa Clara, Calif. 95052*
*Tel. (408) 243-0414*

*SEATTLE, WASHINGTON 98104*
*911 Western Avenue*
*Tel. (206) Main 2-4203*

*SPRINGFIELD, MASSACHUSETTS 01101*
*730 Worcester Ave.*
*Tel. (413) 788-6911*

*WILMINGTON, DELAWARE 19803*
*2005 Concord Pike, Fairfax*
*Tel. (302) Olympia 8-6531*

***Additional District Offices are maintained by:***

**Agricultural Division**

EL DORADO, ARKANSAS 71731
Smackover Highway
P. O. Box 231
Tel. (501) Union 3-3151

LULING, LOUISIANA 70070
P. O. Box 174
Tel. (504) 784-2911

**Building Products Department**

ST. LOUIS, MISSOURI 63166
800 N. Lindbergh Blvd.
Tel. (314) Wydown 3-1000

LOS ANGELES, CALIFORNIA 90066
814 San Fernando Road
Tel. (213) CA. 2-9111

**Chemstrand Company Division**

AKRON, OHIO 44313
3030 West Market St.
Tel. (216) Temple 6-7941

CHARLOTTE, NORTH CAROLINA 28202
Wachovia Bank Building
129 West Trade St.
Tel. (704) 376-9871

NEW YORK, NEW YORK 10001
350 Fifth Ave.
Tel. (212) 556-5100

ENGLEWOOD CLIFFS, N. J.
661 Palisades Ave.
Englewood Cliffs, New Jersey 07631
Tel. (201) 568-2151

**Hydrocarbons & Polymers Division Lion Oil**

EL DORADO, ARKANSAS 71730
Lion Oil Building
Tel. (501) Union 3-3111

JACKSON, MISSISSIPPI 39209
P. O. Box 10937
Westland Station
Tel. (601) Fleetwood 2-3648

LITTLE ROCK, ARKANSAS 72203
1515 West Seventh St.
Tel. (501) Franklin 6-2437

MEMPHIS, TENNESSEE 38101
1023 Riverside Drive
P. O. Box 252
Tel. (901) Whitehall 8-4451

**Organic Chemicals Division**
***(Rubber Industry)***

AKRON, OHIO 44311
920 Brown Street
P. O. Box 2307
Tel. (216) Hemlock 4-1921

***MONSANTO, 800 N. LINDBERGH BLVD., ST. LOUIS, MISSOURI 63166***

0515220

FUNCTIONAL FLUIDS

Monsanto



2-2130-0466-6 LITHO IN U.S.A.

TOWOLDMON0035910

0515221

MONSANTO, 800 N. LINDBERGH BLVD., ST. LOUIS, MISSOURI 63166

TOWOLDMON0035911