

ALL-PURPOSE JOINT COMB

DIRECTIONS FOR USE

[illegible]

62 LB. NET WEIGHT

SAN CARLOS AND ONTARIO, CALIF.
HUNTER, TEXAS
FROZEN ARROW, OKLAHOMA
DENVER, COLORADO




CAUTION: READ BEFORE USING

CAUSE SERIOUS BODILY HARM.
AIDS ASBESTOS FIBERS.
EATING DUST.

PAGE JOINT COMPOUND
RECOMMENDED FOR USE IN GYPSUM
DRUMWALL CONSTRUCTION TO
EMBED REINFORCING BARS, TO
FINISH AND CONCEAL JOINTS AND
NAILHEADS AND FOR SKIP TEMPLING.


DO NOT APPLY TO ROOM TEMPERATURES BELOW 50 DEGREES FAHRENHEIT.

PACO TEXTURES DIV.
KELLY-MOORE PAINT CO., INC.
BROKEN ARROW, OKLAHOMA
74012

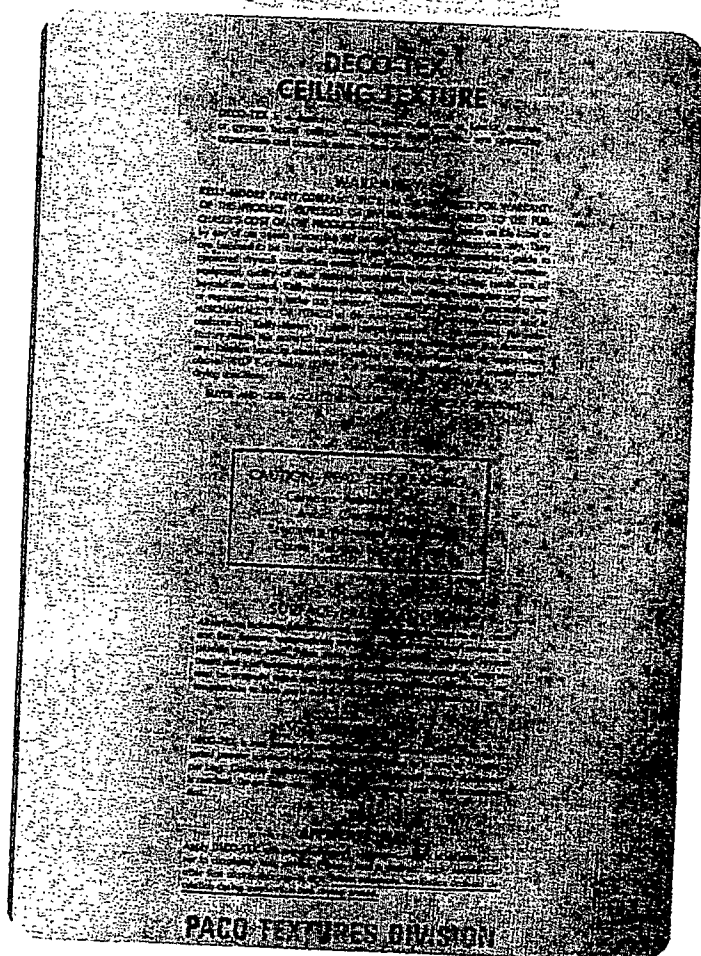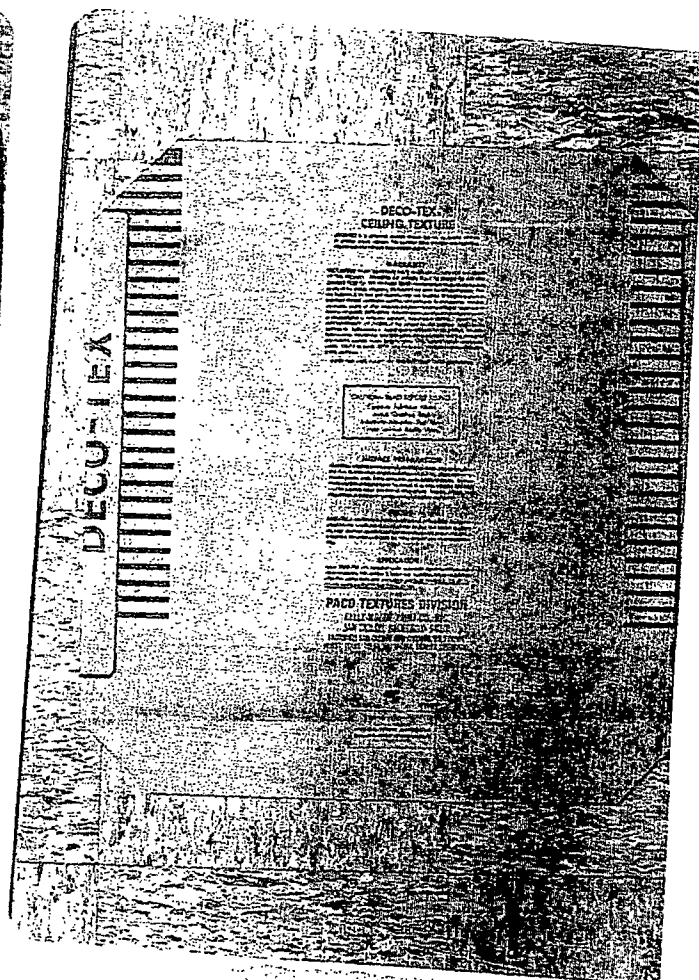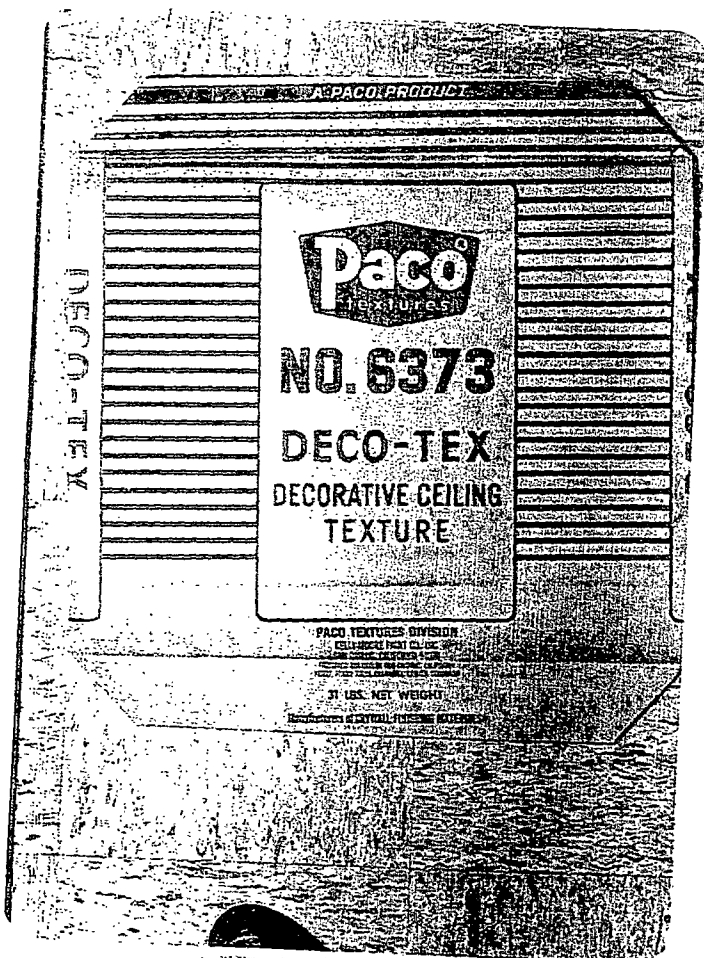


NO. 6373
DECO-TEX
DECORATIVE
CEILING
TEXTURE


KMIBB 6612

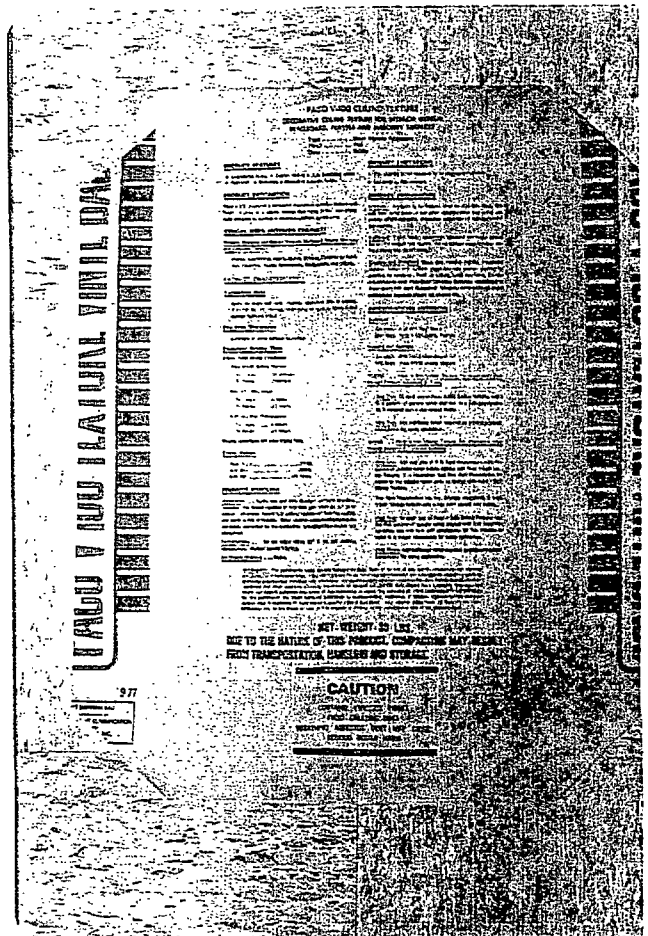


VINYL BASE V-100 FINE NO. 6374
DECORATIVE CEILING TEXTURE

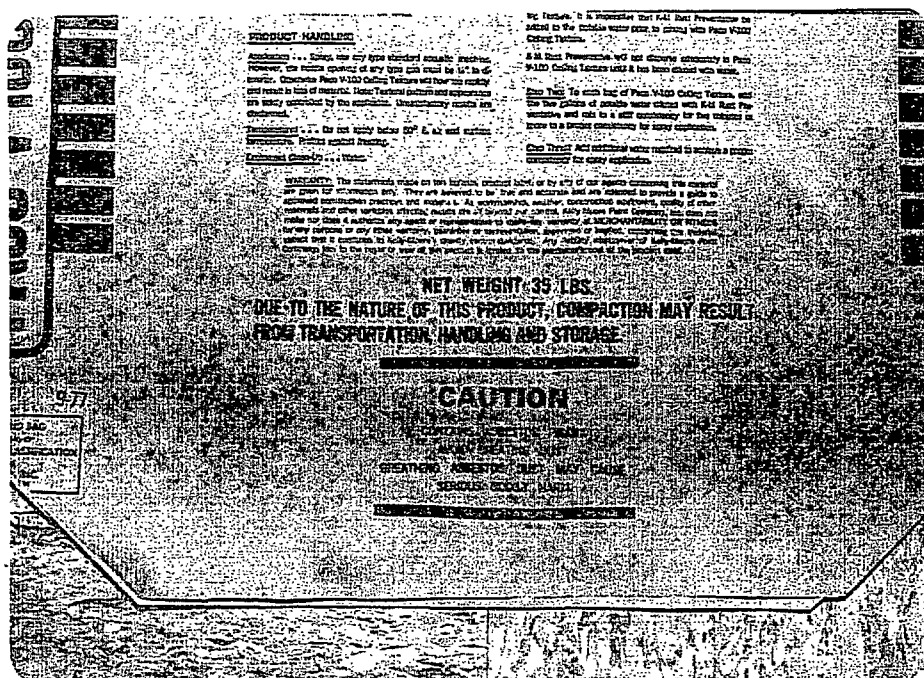


KNBB 6613

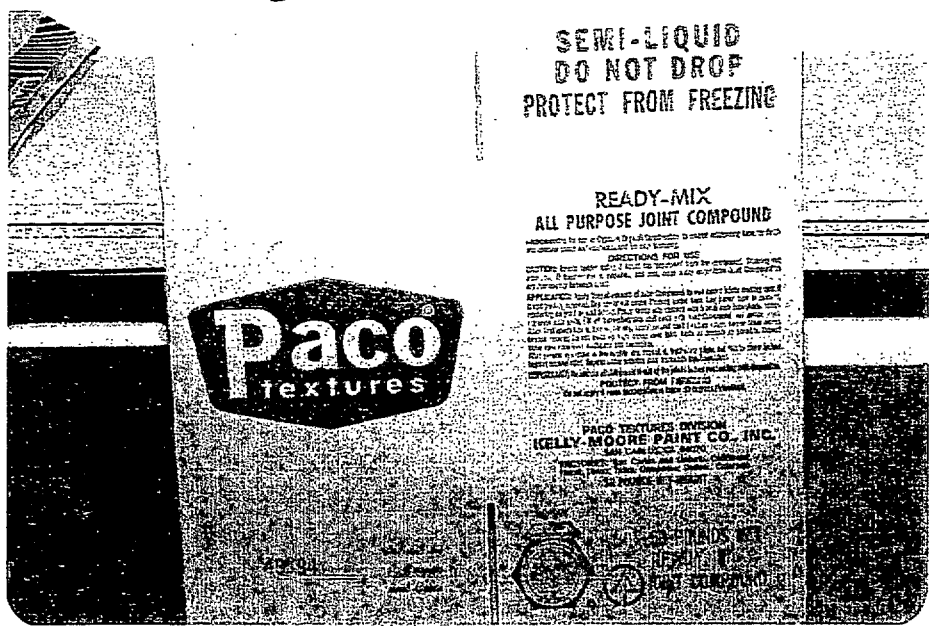

READY-MIX
ALL PURPOSE JOINT COMPOUND

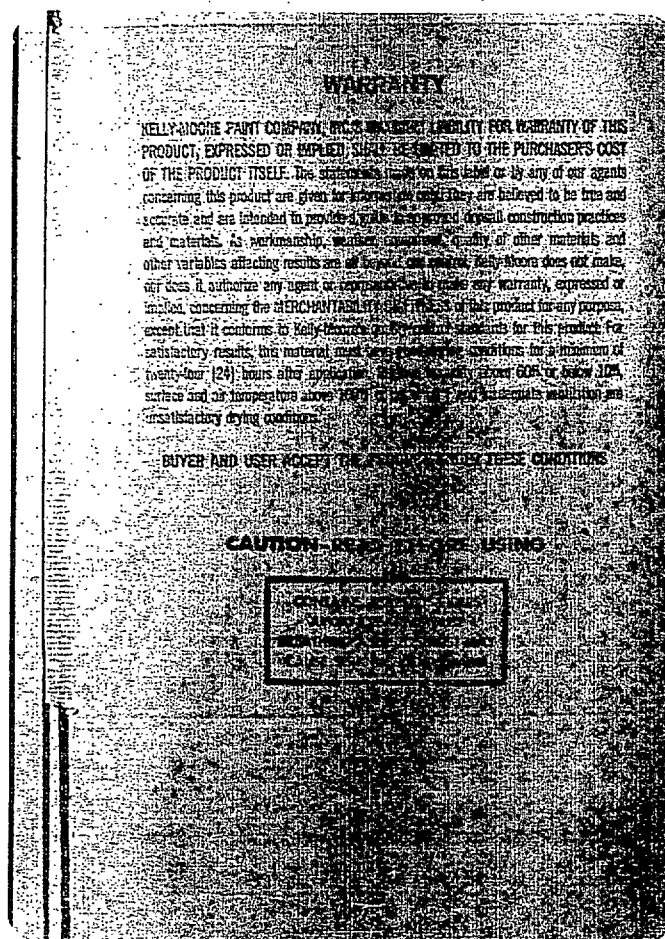

KNMBB 6614

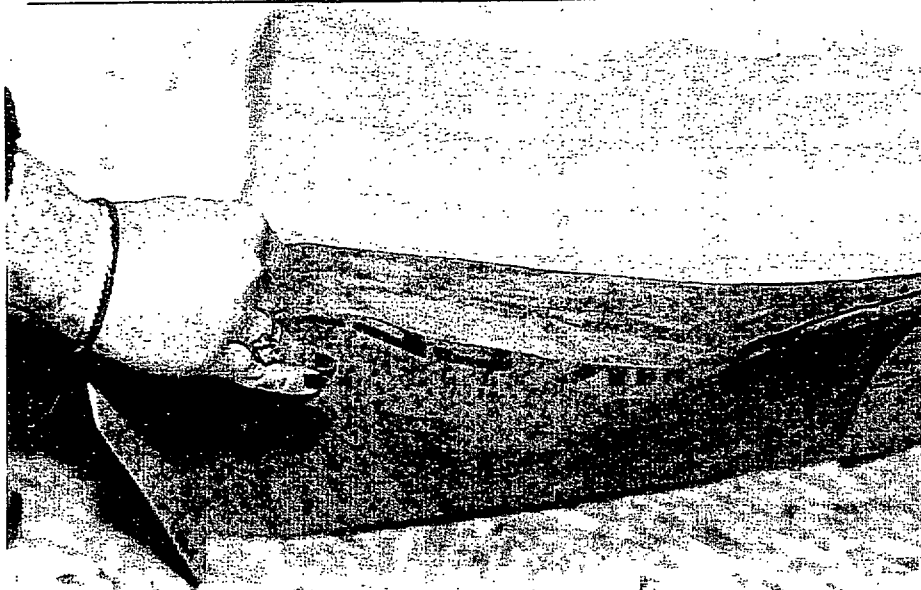


Type of bag
used for packagi
asbestos product


PACO-TEX WALL TEXTURE



KMBB 661:

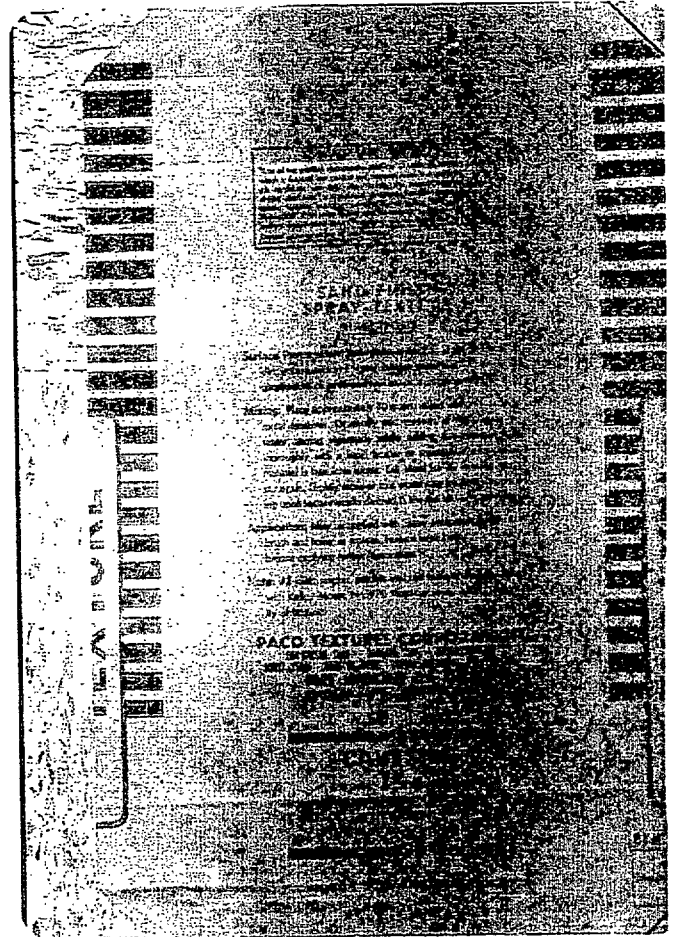


SAND FINISH SPRAY TEXTURE No. 5580

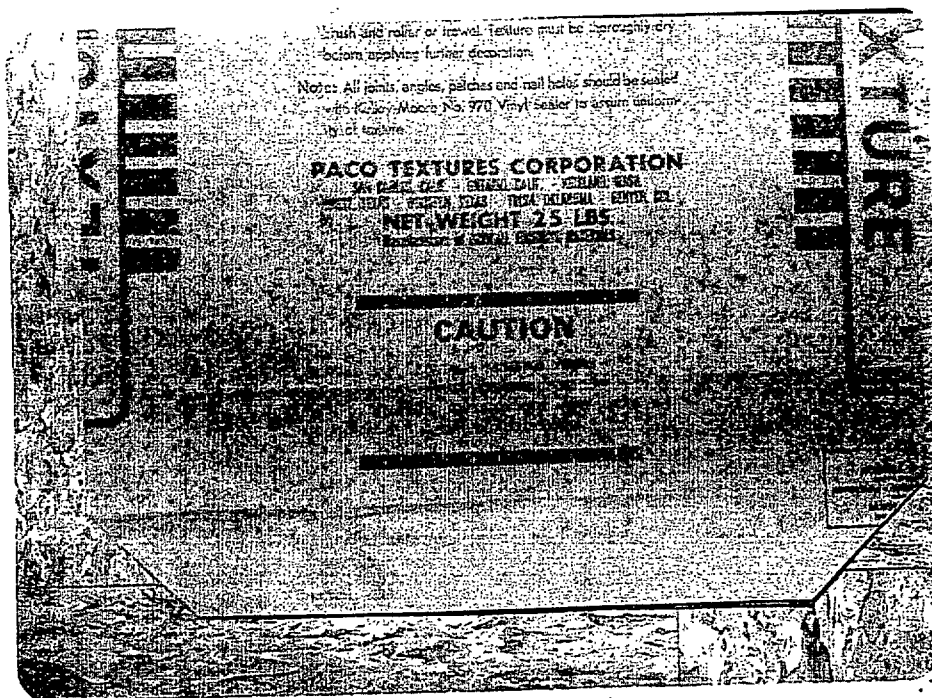


KMBB 6616




SLOW "TYPE"
QUICK-SET
JOINT COMPOUND

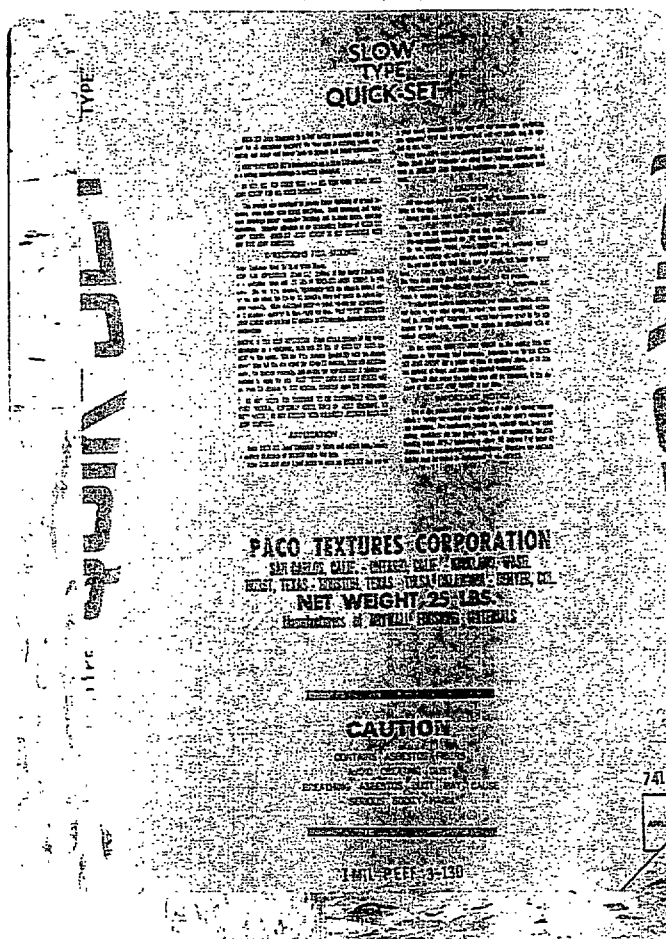


KMBB 6617

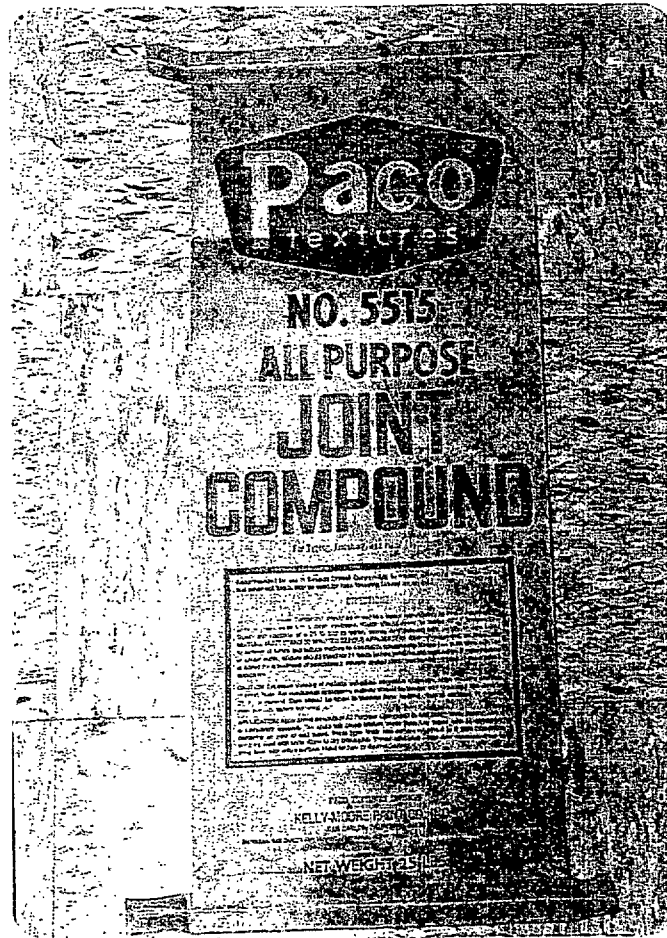


ALL PURPOSE JOINT COMPOUND

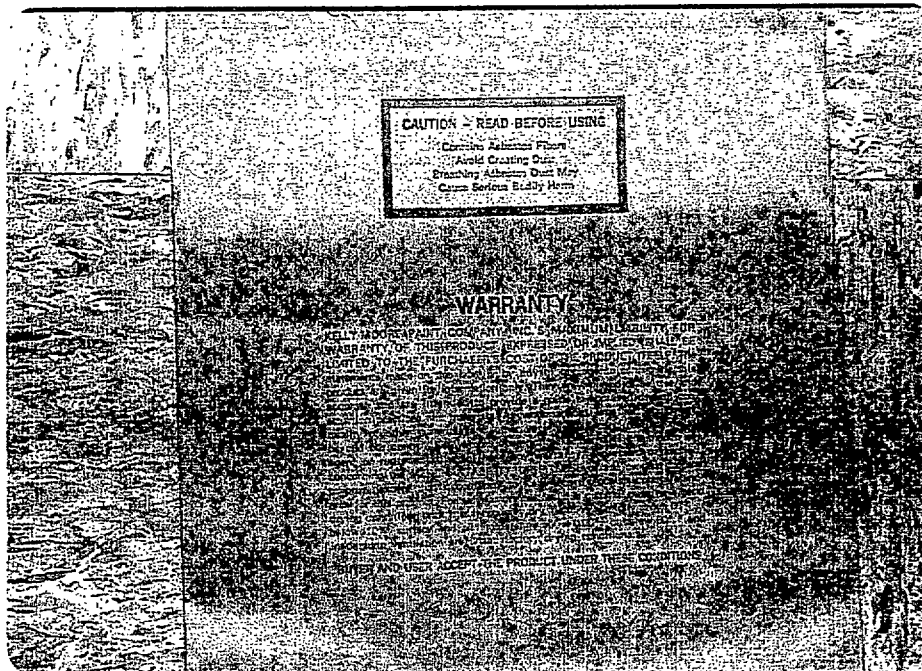


KMBB 6618

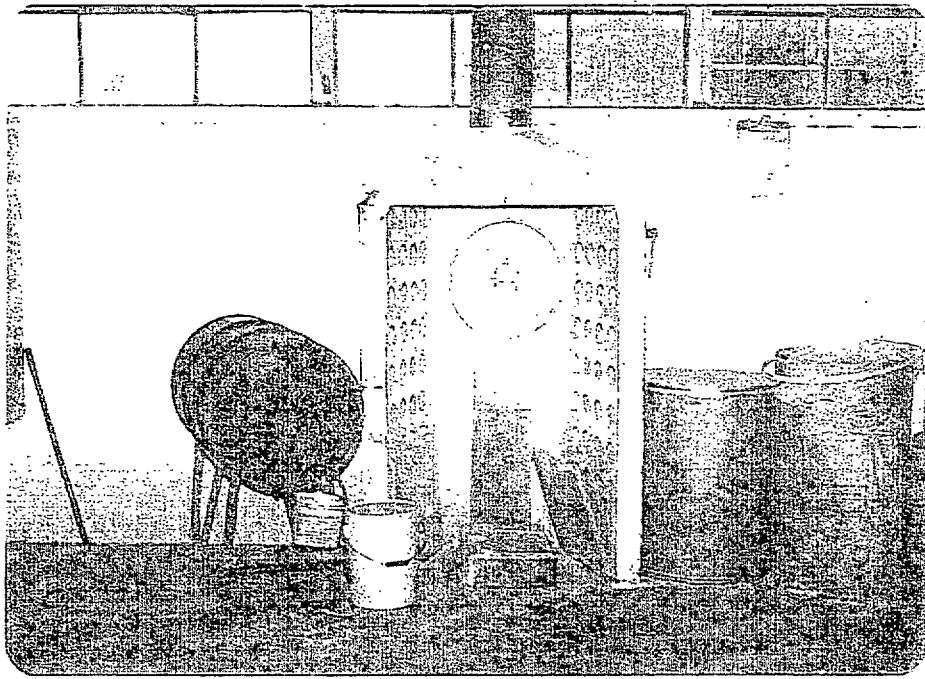


KELLY-MOORE PAINT/PACO PLANT
 1000 1000 1000

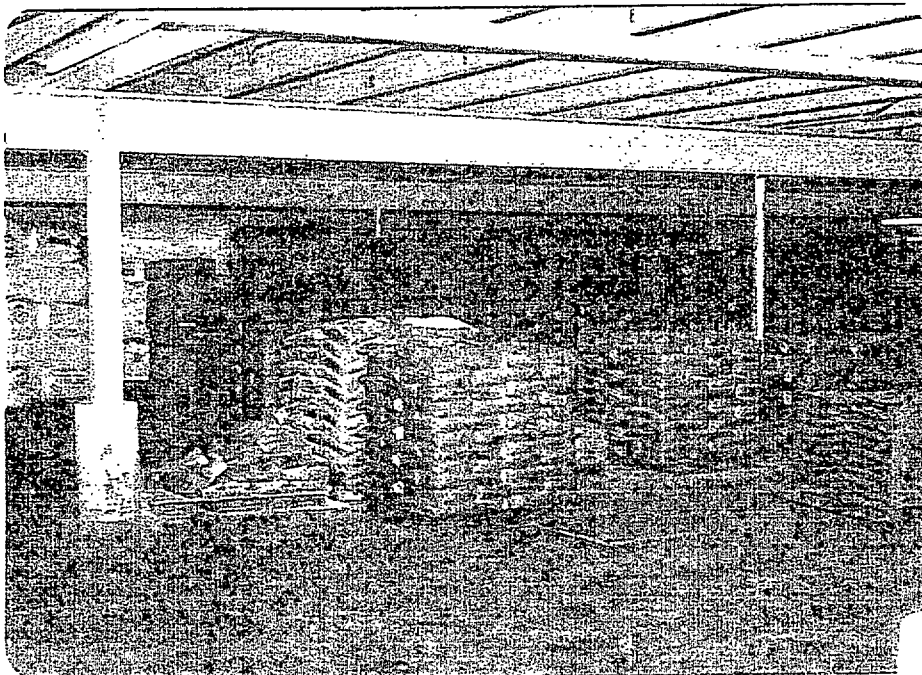

KMBB 6619

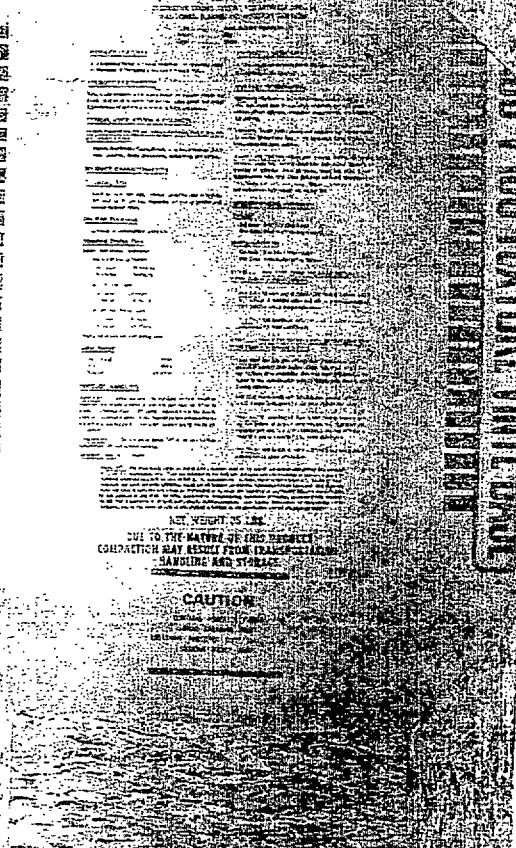


KMVB 6620



KNBB 6622




TEXTURE
PAINT

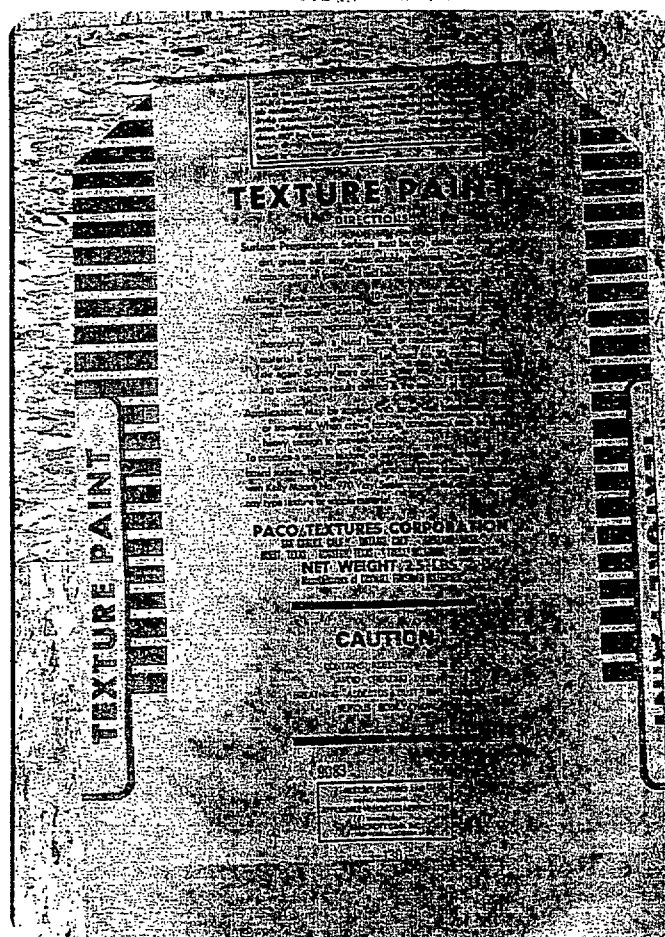


KMBB 6623




FAST "TYPE"
QUICK-SET
JOINT COMPOUND

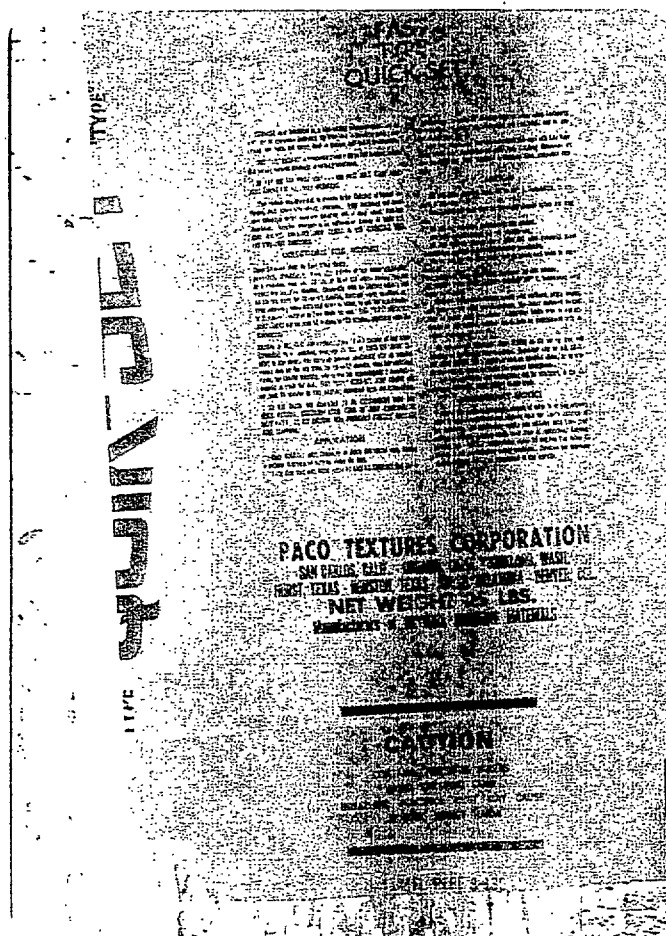


KMBB 6624

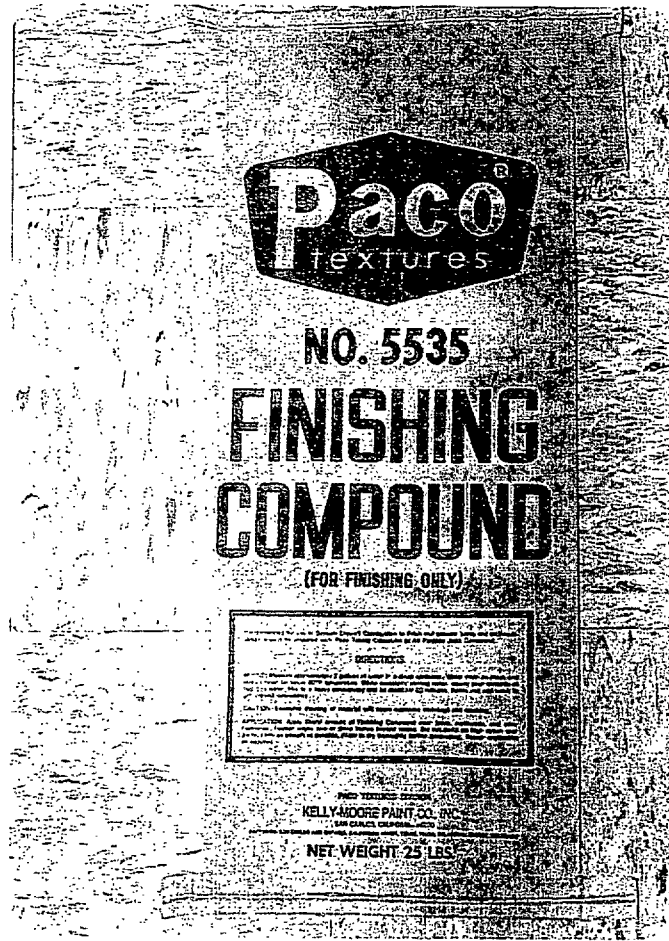


FINISHING COMPOUND

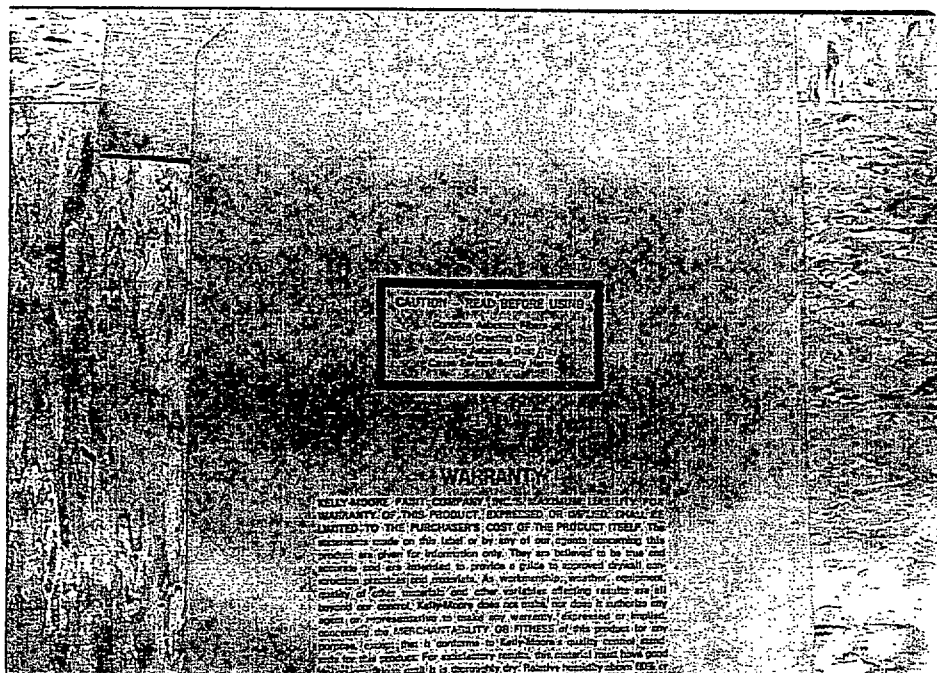


KHBB 6625

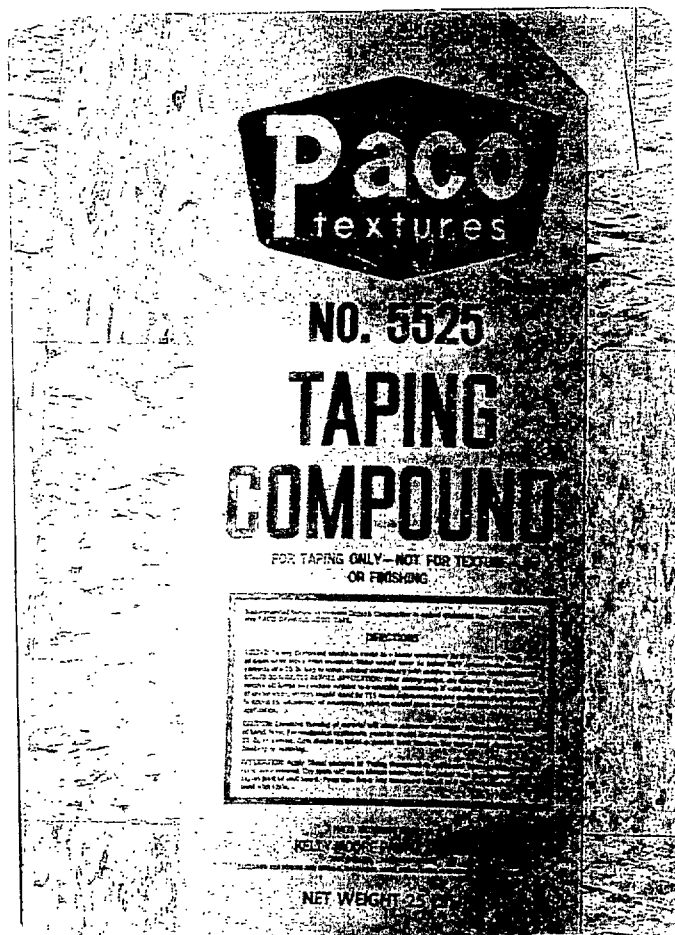

TAPING COMPOUND

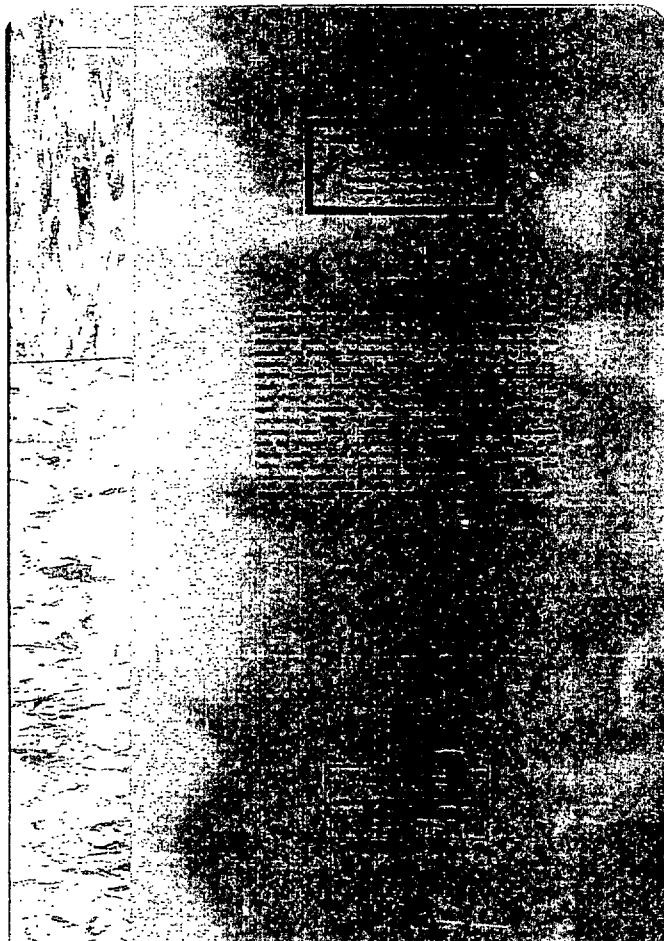


KHBB 6626

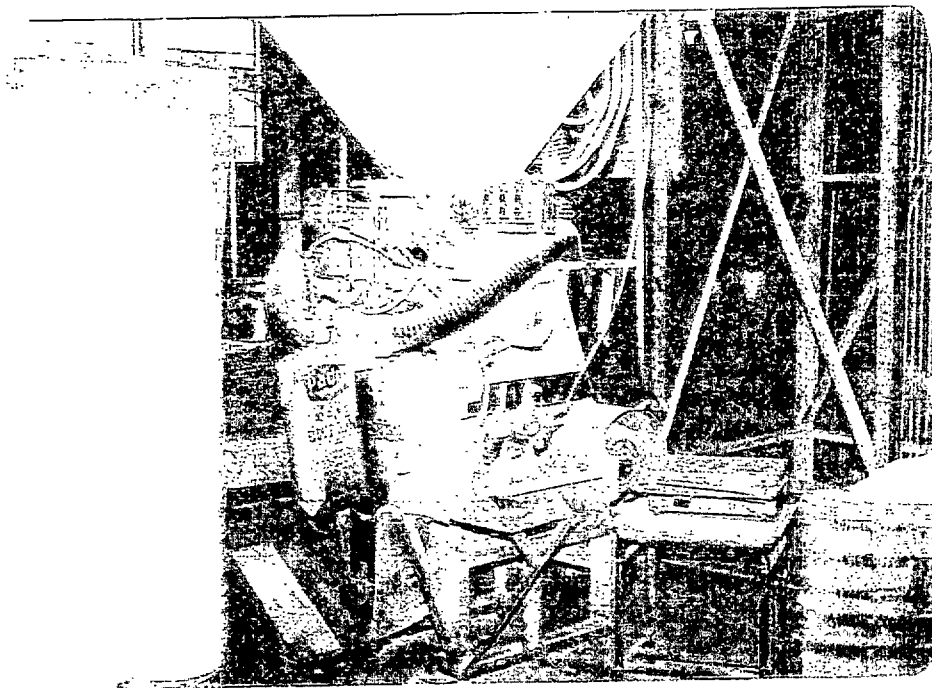

Kelly-Moore Paint/PACO Plant



KMBB 6627

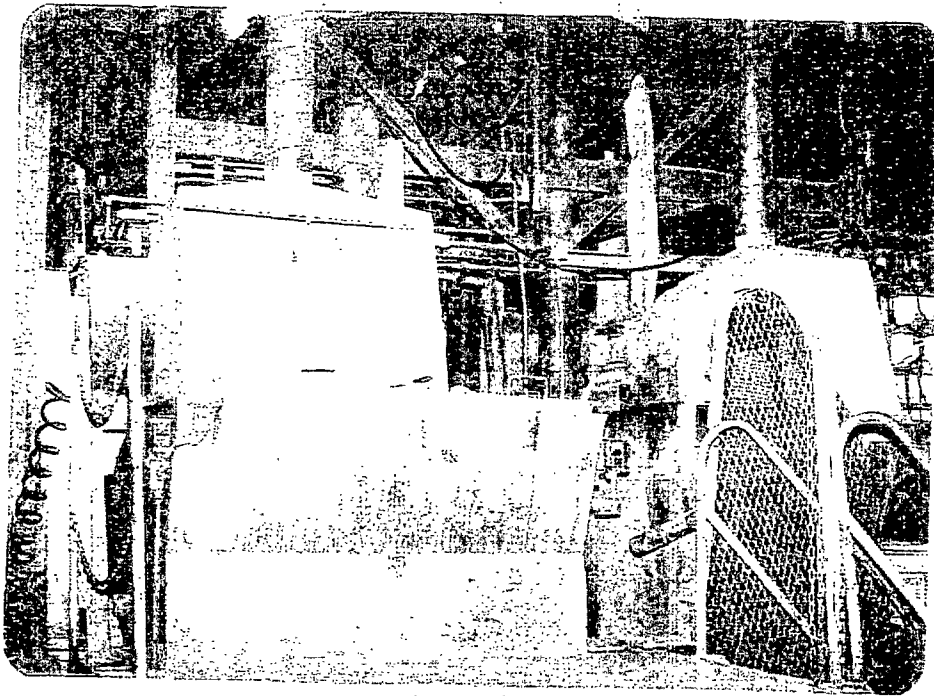

Kelly-Moore Paint/PACO plant

KHBB 6628

CAUTION: READ BEFORE USING

Caution: Asbestos Fiber
Avoid Grinding Dust
Wear Mask, Gloves, Dust Mask
Gauze Sponges, Acrylic Resin

SURFACE PREPARATION

All surfaces to be coated must be clean, dry, and free of grease, oil, dirt, and any other contaminants. Surfaces must be sanded or ground to a fine, uniform finish. Gravel, sand, and other loose material must be removed. Surfaces must be properly etched and free of moisture before use. Do not use on wet or damp surfaces. Do not use on surfaces that are not properly prepared.

MIXING

Deco-Tex is a two-part system. Part A is the base resin and Part B is the catalyst. Mix the two parts in a 1:1 ratio by volume. Mix thoroughly in a clean container. Do not use if the mixture is not uniform or if it has a lumpy appearance.

DECO-TEX

Deco-Tex is a two-part system. Part A is the base resin and Part B is the catalyst. Mix the two parts in a 1:1 ratio by volume. Mix thoroughly in a clean container. Do not use if the mixture is not uniform or if it has a lumpy appearance.

4432 6629