

Carrier Corporation • Syracuse 1, N. Y.

MARINE DIVISION:

385 Madison Ave.
New York 17, N. Y.

Carrier

INTERNATIONAL DIVISION

385 Madison Ave.
New York 17, N. Y.

Offices and Dealers in principal cities—refer to your telephone directory.

Carrier AIR CONDITIONING

Room Air Conditioners—for individual rooms and offices in compact modern styling and handsome finish to blend with finest of interior furnishings. Window sill models in $\frac{1}{4}$, $\frac{1}{2}$, $\frac{3}{4}$ and 1 hp capacity. Console models in 1 and $1\frac{1}{2}$ hp capacity.

Weathermakers—completely self-contained air conditioners for commercial and industrial applications. Seven sizes from 2 to 20 hp cooling capacity.

Year-Round Weathermakers—for heating and cooling in residential and commercial applications. Compact, efficient gas heating combined with summer cooling. Six combination sizes.

Zoning Weathermakers—blow-through fan-coil units for air conditioning systems using remote sources of heat and refrigeration. Six sizes for comfort and industrial applications, 6 to 80 tons.


System Weathermakers—fan-coil unitary air conditioners for application to central cooling and heating systems for comfort and industrial use. Seven basic sizes in vertical and horizontal models.

Central Station Air Conditioners—for application with fan and duct systems for large spaces such as stores, theatres, auditoriums and industrial plants.

Weathermaster Systems—for air conditioning of multi-story, multi-room buildings such as hotels, hospitals, office and apartment buildings. System consists of room units with individual temperature control, and central station air conditioning. Conditioned air distributed by high velocity conduits to individual Weathermaster units shown.

Blast Freezers and Cold Diffusers—for food freezing and storage, meat packing operations, and other industries requiring low temperatures. Units available in suspension or floor models, for use within space to be refrigerated or remotely located and connected by ducts.

Write for descriptive literature.

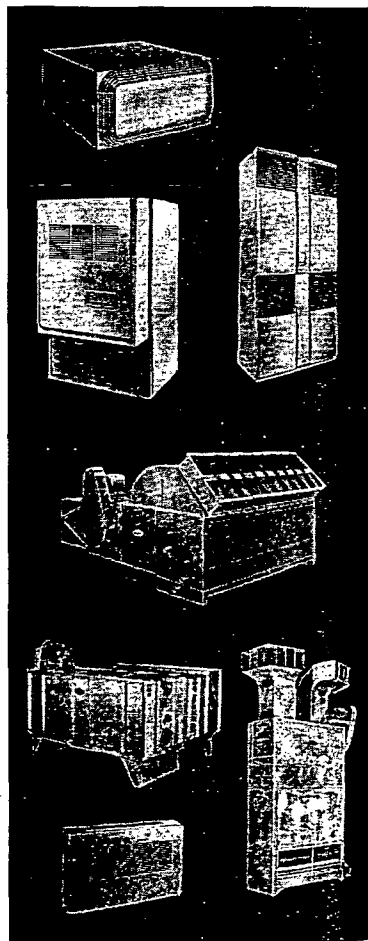

Carrier

REFRIGERATION

Centrifugal Refrigerating Machines—for large comfort and industrial air conditioning applications and for process cooling. High efficiency at peak or partial loads. Operate with any standard motor or turbine drive. Available in capacities up to 3000 tons in a single unit.


Absorption Refrigerating Machines—for producing chilled water at 38 F or higher in fully automatic operation from 10 to 100 per cent capacity. Uses high or low pressure steam for operation. Capacities 115, 150, 200, 270, 350, 500, and 700 tons.

Reciprocating Refrigerating Machines—for comfort and industrial air conditioning and for process cooling. Direct or belt drive, water or evaporative cooled types, 100 to 200 tons capacity.

Commercial Refrigerating Machines—for storage refrigerators, display cases, walk-in coolers and similar duty. Complete with compressor, drive, air or water cooled condenser and controls. All sizes.

Reciprocating Compressors—for refrigeration needs of air conditioning and process cooling. Adaptable to all drives and available for "Freon" and ammonia refrigerants. Sizes from 3 to 200 hp.

Evaporative Condensers—for use with refrigerating compressors in place of water cooled condensers. Simplify water supply and disposal problems. For indoor or outdoor use. Capacities 10 to 85 tons, for "Freon" or ammonia.

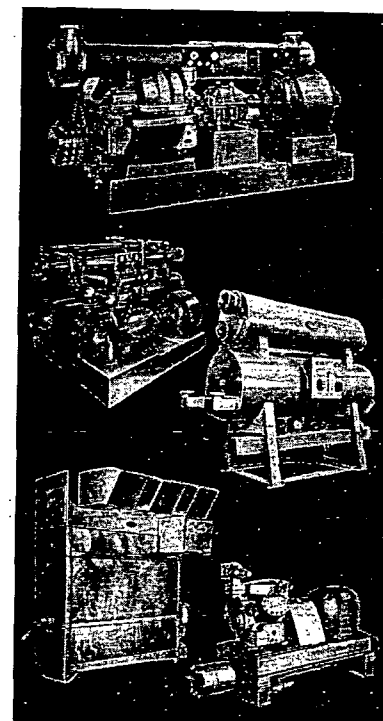

Carrier

INDUSTRIAL HEATING

Unit Heaters—for commercial and industrial space heating using steam or hot water. Complete range of sizes in two types: Model 46U Horizontal Discharge in capacities from 21,000 to 200,000 Btu per hour, and Model 46S Four-way Directed-flow in capacities from 49,000 to 500,000 Btu per hour at 2 lb steam.

Gas-Fired Unit Heaters—for clean, economical heat in offices, stores, factories and similar spaces where gas is available. Approved for manufactured, mixed, natural and LP gases. Capacities: 50,000 to 230,000 Btu per hour.

Heat Diffusers—for ventilating as well as heating large commercial and industrial spaces. Floor, wall or ceiling mounted with coils for steam or hot water. Capacities 115,000 to 2,390,000 Btu per hour at 2 lb steam.

