




AuctionWatch

Increase Your Online Sales Today!

Sign Up Now
to start your
FREE TRIAL

Crane Sheet Packing

As shown "Crane" is registered in the United States Patent Office.

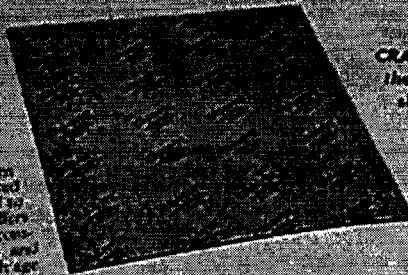

CRANITE—
The best in
sheet packing

An improved,
manufactured
sheet for Crane

Crane Sheet Packing is made from an asbestos composition. The selected long fiber asbestos, cross laminated to provide unusual tensile strength, offers very uniform and high resistance to compression. It is exceptionally strong and rugged, and will not deteriorate with age.

Recommendations: The packing is unhesitatingly recommended for a multitude of services such as steam, water, oil, dry air, acids, ammonia, alkalis, gases, etc., and is suitable for temperatures up to 715 F.

Underwriters' approved: Crane Sheet Packing has been approved by the Underwriters' Laboratories, Inc., for use on hazardous liquids.

Easy to stock—no spottages: The adaptability of Crane packing to a large number of services and its frequent usage coupled with its high quality and ability to withstand deterioration make it convenient and economical for the user to carry large quantities in stock with no fear of loss through spoilage.

Proper use: For best results, gaskets cut from Crane packing should be coated with Crane Thread Lubricant or Anti-Seize Thread Compound when being installed. For description of thread lubricant and compound, see page 224.

Sizes and Weights — Prices on Request

Thickness	Size of square sheet	Average weight
Inches	Inches	Per Square Foot
1/16	26 or 48"	33 pounds
1/32	26 or 48"	42 pounds
1/64	26 or 48"	52 pounds
1/8	16 to 128 inches	40 pounds
1/4	16 to 128 inches	40 pounds

*Other sheet sizes up to 120 inches square, made to order; information on request.

Wide choice of sizes: As indicated in the table above, Crane packing is regularly furnished in thicknesses of 1/16, 1/32, and 1/64 inch and in sheets 16 or 48 inches square. Other thicknesses and sheet sizes are made to order; information on request.

"CC" Rubber Sheet Packing

27



Manufactured solely for Crane

"CC" Rubber Sheet Packing, manufactured solely for Crane, is especially well adapted for high or low pressure service on saturated steam, hot and cold water, air, gases, etc.

Wide choice of sizes: As indicated in the table at the right, "CC" Rubber Sheet Packing is regularly furnished in rolls 16 inches wide and in thicknesses of 1/16 inch, 1/32 inch, or 1/64 inch. Other widths, up to 72 inches, are available on special order; information will be furnished on request.

Sizes and Weights — Prices on Request

Thickness	Width of roll	Average weight
Inches	Inches	Per Square Yard
1/16	36	5 1/4 pounds
1/32	36	8 pounds
1/64	36	10 1/4 pounds

*Rolls of other widths, up to 72 inches, made to order; information on request.

Gaskets Corrosi

Material	Size of joint	Weight
1/4" Lead	1/4"	1 1/4
1/4" Lead	1/2"	1 1/2
1/4" Lead	3/4"	1 3/4
1/4" Lead	1"	2
1/4" Lead	1 1/4"	2 1/4
1/4" Lead	1 1/2"	2 1/2
1/4" Lead	1 3/4"	2 3/4
1/4" Lead	2"	3
1/4" Lead	2 1/4"	3 1/4
1/4" Lead	2 1/2"	3 1/2
1/4" Lead	2 3/4"	3 3/4
1/4" Lead	3"	4
1/4" Lead	3 1/4"	4 1/4
1/4" Lead	3 1/2"	4 1/2
1/4" Lead	3 3/4"	4 3/4
1/4" Lead	4"	5
1/4" Lead	4 1/4"	5 1/4
1/4" Lead	4 1/2"	5 1/2
1/4" Lead	4 3/4"	5 3/4
1/4" Lead	5"	6
1/4" Lead	5 1/4"	6 1/4
1/4" Lead	5 1/2"	6 1/2
1/4" Lead	5 3/4"	6 3/4
1/4" Lead	6"	7
1/4" Lead	6 1/4"	7 1/4
1/4" Lead	6 1/2"	7 1/2
1/4" Lead	6 3/4"	7 3/4
1/4" Lead	7"	8
1/4" Lead	7 1/4"	8 1/4
1/4" Lead	7 1/2"	8 1/2
1/4" Lead	7 3/4"	8 3/4
1/4" Lead	8"	9
1/4" Lead	8 1/4"	9 1/4
1/4" Lead	8 1/2"	9 1/2
1/4" Lead	8 3/4"	9 3/4
1/4" Lead	9"	10
1/4" Lead	9 1/4"	10 1/4
1/4" Lead	9 1/2"	10 1/2
1/4" Lead	9 3/4"	10 3/4
1/4" Lead	10"	11
1/4" Lead	10 1/4"	11 1/4
1/4" Lead	10 1/2"	11 1/2
1/4" Lead	10 3/4"	11 3/4
1/4" Lead	11"	12
1/4" Lead	11 1/4"	12 1/4
1/4" Lead	11 1/2"	12 1/2
1/4" Lead	11 3/4"	12 3/4
1/4" Lead	12"	13
1/4" Lead	12 1/4"	13 1/4
1/4" Lead	12 1/2"	13 1/2
1/4" Lead	12 3/4"	13 3/4
1/4" Lead	13"	14
1/4" Lead	13 1/4"	14 1/4
1/4" Lead	13 1/2"	14 1/2
1/4" Lead	13 3/4"	14 3/4
1/4" Lead	14"	15
1/4" Lead	14 1/4"	15 1/4
1/4" Lead	14 1/2"	15 1/2
1/4" Lead	14 3/4"	15 3/4
1/4" Lead	15"	16
1/4" Lead	15 1/4"	16 1/4
1/4" Lead	15 1/2"	16 1/2
1/4" Lead	15 3/4"	16 3/4
1/4" Lead	16"	17
1/4" Lead	16 1/4"	17 1/4
1/4" Lead	16 1/2"	17 1/2
1/4" Lead	16 3/4"	17 3/4
1/4" Lead	17"	18
1/4" Lead	17 1/4"	18 1/4
1/4" Lead	17 1/2"	18 1/2
1/4" Lead	17 3/4"	18 3/4
1/4" Lead	18"	19
1/4" Lead	18 1/4"	19 1/4
1/4" Lead	18 1/2"	19 1/2
1/4" Lead	18 3/4"	19 3/4
1/4" Lead	19"	20
1/4" Lead	19 1/4"	20 1/4
1/4" Lead	19 1/2"	20 1/2
1/4" Lead	19 3/4"	20 3/4
1/4" Lead	20"	21
1/4" Lead	20 1/4"	21 1/4
1/4" Lead	20 1/2"	21 1/2
1/4" Lead	20 3/4"	21 3/4
1/4" Lead	21"	22
1/4" Lead	21 1/4"	22 1/4
1/4" Lead	21 1/2"	22 1/2
1/4" Lead	21 3/4"	22 3/4
1/4" Lead	22"	23
1/4" Lead	22 1/4"	23 1/4
1/4" Lead	22 1/2"	23 1/2
1/4" Lead	22 3/4"	23 3/4
1/4" Lead	23"	24
1/4" Lead	23 1/4"	24 1/4
1/4" Lead	23 1/2"	24 1/2
1/4" Lead	23 3/4"	24 3/4
1/4" Lead	24"	25
1/4" Lead	24 1/4"	25 1/4
1/4" Lead	24 1/2"	25 1/2
1/4" Lead	24 3/4"	25 3/4
1/4" Lead	25"	26
1/4" Lead	25 1/4"	26 1/4
1/4" Lead	25 1/2"	26 1/2
1/4" Lead	25 3/4"	26 3/4
1/4" Lead	26"	27
1/4" Lead	26 1/4"	27 1/4
1/4" Lead	26 1/2"	27 1/2
1/4" Lead	26 3/4"	27 3/4
1/4" Lead	27"	28
1/4" Lead	27 1/4"	28 1/4
1/4" Lead	27 1/2"	28 1/2
1/4" Lead	27 3/4"	28 3/4
1/4" Lead	28"	29
1/4" Lead	28 1/4"	29 1/4
1/4" Lead	28 1/2"	29 1/2
1/4" Lead	28 3/4"	29 3/4
1/4" Lead	29"	30
1/4" Lead	29 1/4"	30 1/4
1/4" Lead	29 1/2"	30 1/2
1/4" Lead	29 3/4"	30 3/4
1/4" Lead	30"	31
1/4" Lead	30 1/4"	31 1/4
1/4" Lead	30 1/2"	31 1/2
1/4" Lead	30 3/4"	31 3/4
1/4" Lead	31"	32
1/4" Lead	31 1/4"	32 1/4
1/4" Lead	31 1/2"	32 1/2
1/4" Lead	31 3/4"	32 3/4
1/4" Lead	32"	33
1/4" Lead	32 1/4"	33 1/4
1/4" Lead	32 1/2"	33 1/2
1/4" Lead	32 3/4"	33 3/4
1/4" Lead	33"	34
1/4" Lead	33 1/4"	34 1/4
1/4" Lead	33 1/2"	34 1/2
1/4" Lead	33 3/4"	34 3/4
1/4" Lead	34"	35
1/4" Lead	34 1/4"	35 1/4
1/4" Lead	34 1/2"	35 1/2
1/4" Lead	34 3/4"	35 3/4
1/4" Lead	35"	36
1/4" Lead	35 1/4"	36 1/4
1/4" Lead	35 1/2"	36 1/2
1/4" Lead	35 3/4"	36 3/4
1/4" Lead	36"	37
1/4" Lead	36 1/4"	37 1/4
1/4" Lead	36 1/2"	37 1/2
1/4" Lead	36 3/4"	37 3/4
1/4" Lead	37"	38
1/4" Lead	37 1/4"	38 1/4
1/4" Lead	37 1/2"	38 1/2
1/4" Lead	37 3/4"	38 3/4
1/4" Lead	38"	39
1/4" Lead	38 1/4"	39 1/4
1/4" Lead	38 1/2"	39 1/2
1/4" Lead	38 3/4"	39 3/4
1/4" Lead	39"	40
1/4" Lead	39 1/4"	40 1/4
1/4" Lead	39 1/2"	40 1/2
1/4" Lead	39 3/4"	40 3/4
1/4" Lead	40"	41
1/4" Lead	40 1/4"	41 1/4
1/4" Lead	40 1/2"	41 1/2
1/4" Lead	40 3/4"	41 3/4
1/4" Lead	41"	42
1/4" Lead	41 1/4"	42 1/4
1/4" Lead	41 1/2"	42 1/2
1/4" Lead	41 3/4"	42 3/4
1/4" Lead	42"	43
1/4" Lead	42 1/4"	43 1/4
1/4" Lead	42 1/2"	43 1/2
1/4" Lead	42 3/4"	43 3/4
1/4" Lead	43"	44
1/4" Lead	43 1/4"	44 1/4
1/4" Lead	43 1/2"	44 1/2
1/4" Lead	43 3/4"	44 3/4
1/4" Lead	44"	45
1/4" Lead	44 1/4"	45 1/4
1/4" Lead	44 1/2"	45 1/2
1/4" Lead	44 3/4"	45 3/4
1/4" Lead	45"	46
1/4" Lead	45 1/4"	46 1/4
1/4" Lead	45 1/2"	46 1/2
1/4" Lead	45 3/4"	46 3/4
1/4" Lead	46"	47
1/4" Lead	46 1/4"	47 1/4
1/4" Lead	46 1/2"	47 1/2
1/4" Lead	46 3/4"	47 3/4
1/4" Lead	47"	48
1/4" Lead	47 1/4"	48 1/4
1/4" Lead	47 1/2"	48 1/2
1/4" Lead	47 3/4"	48 3/4
1/4" Lead	48"	49
1/4" Lead	48 1/4"	49 1/4
1/4" Lead	48 1/2"	49 1/2
1/4" Lead	48 3/4"	49 3/4
1/4" Lead	49"	50
1/4" Lead	49 1/4"	50 1/4
1/4" Lead	49 1/2"	50 1/2
1/4" Lead	49 3/4"	50 3/4
1/4" Lead	50"	51
1/4" Lead	50 1/4"	51 1/4
1/4" Lead	50 1/2"	51 1/2
1/4" Lead	50 3/4"	51 3/4
1/4" Lead	51"	52
1/4" Lead	51 1/4"	52 1/4
1/4" Lead	51 1/2"	52 1/2
1/4" Lead	51 3/4"	52 3/4
1/4" Lead	52"	53
1/4" Lead	52 1/4"	53 1/4
1/4" Lead	52 1/2"	53 1/2
1/4" Lead	52 3/4"	53 3/4
1/4" Lead	53"	54
1/4" Lead	53 1/4"	54 1/4
1/4" Lead	53 1/2"	54 1/2
1/4" Lead	53 3/4"	54 3/4
1/4" Lead	54"	55
1/4" Lead	54 1/4"	55 1/4
1/4" Lead	54 1/2"	55 1/2
1/4" Lead	54 3/4"	55 3/4
1/4" Lead	55"	56
1/4" Lead	55 1/4"	56 1/4
1/4" Lead	55 1/2"	56 1/2
1/4" Lead	55 3/4"	56 3/4
1/4" Lead	56"	57
1/4" Lead	56 1/4"	57 1/4
1/4" Lead	56 1/2"	57 1/2
1/4" Lead	56 3/4"	57 3/4
1/4" Lead	57"	58
1/4" Lead	57 1/4"	58 1/4
1/4" Lead	57 1/2"	58 1/2
1/4" Lead	57 3/4"	58 3/4
1/4" Lead	58"	59
1/4" Lead	58 1/4"	59 1/4
1/4" Lead	58 1/2"	59 1/2
1/4" Lead	58 3/4"	59 3/4
1/4" Lead	59"	60
1/4" Lead	59 1/4"	60 1/4
1/4" Lead	59 1/2"	60 1/2
1/4" Lead	59 3/4"	60 3/4
1/4" Lead	60"	61
1/4" Lead	60 1/4"	61 1/4
1/4" Lead	60 1/2"	61 1/2
1/4" Lead	60 3/4"	61 3/4
1/4" Lead	61"	62
1/4" Lead	61 1/4"	62 1/4
1/4" Lead	61 1/2"	62 1/2
1/4" Lead	61 3/4"	62 3/4
1/4" Lead	62"	63
1/4" Lead	62 1/4"	63 1/4
1/4" Lead	62 1/2"	63 1/2
1/4" Lead	62 3/4"	63 3/4
1/4" Lead	63"	64
1/4" Lead	63 1/4"	64 1/4
1/4" Lead	63 1/2"	64 1/2
1/4" Lead	63 3/4"	64 3/4
1/4" Lead	64"	65
1/4" Lead	64 1/4"	65 1/4
1/4" Lead	64 1/2"	65 1/2
1/4" Lead	64 3/4"	65 3/4
1/4" Lead	65"	66
1/4" Lead	65 1/4"	66 1/4
1/4" Lead	65 1/2"	66 1/2
1/4" Lead	65 3/4"	66 3/4
1/4" Lead	66"	67
1/4" Lead	66 1/4"	67 1/4
1/4" Lead	66 1/2"	67 1/2
1/4" Lead	66 3/4"	67 3/4
1/4" Lead	67"	68
1/4" Lead	67 1/4"	68 1/4
1/4" Lead	67 1/2"	68 1/2
1/4" Lead	67 3/4"	68 3/4
1/4" Lead	68"	69
1/4" Lead	68 1/4"	69 1/4
1/4" Lead	68 1/2"	69 1/2
1/4" Lead	68 3/4"	69 3/4
1/4" Lead	69"	70
1/4" Lead	69 1/4"	70 1/4
1/4" Lead	69 1/2"	70 1/2
1/4" Lead	69 3/4"	70 3/4
1/4" Lead	70"	71
1/4" Lead	70 1/4"	71 1/4
1/4" Lead	70 1/2"	71 1/2
1/4" Lead	70 3/4"	71 3/4
1/4" Lead	71"	72
1/4" Lead	71 1/4"	72 1/4
1/4" Lead	71 1/2"	72 1

C R A N E

365

Rod Packings

Cross Diagonal Packing




List Prices and Dimensions

	Cross Diagonal	Per Pound	Form	How Shipped
S271	1/2-inch and up	2.40	Spiral	1 length per box
	1/4, 5/16, 3/8 and 7/16-inch	2.70	Spiral	
C271	1/2-inch and up	2.30	Coil	
	1/4, 5/16, 3/8 and 7/16-inch	2.60	Coil	
R271	1 1/2-inch I.D. and up	3.40	Ring	

1/4 to 1-inch sizes in 10 to 12 pound boxes
Larger sizes in boxes in proportion to size of packing

Cross Diagonal Rod Packing, for service against hot and cold water, low-pressure steam, ammonia, light oils, and mineral seal oil, in use on reciprocating rods and plungers, allows for the unusual expansion incident to hot-water and ammonia service. Furnished in following forms: spiral (S 271), coil (C 271), and ring (R 271). Sizes 1/4-inch and up.

Universal Piston Packing



List Prices and Dimensions

	Universal	Per Pound	Form
S33	1/2-inch and up	5.40	Spiral
	3/8 to 7/16-inch	5.80	Spiral
C33	1/2-inch and up	5.10	Coil
	3/8 to 7/16-inch	5.50	Coil
	2-inch I.D. and up	5.90	Ring
R33	Step Joint Cemented, 2-inch I.D. and up	8.10	Ring

Universal Piston Packing for service against hot and cold water, brine, air and oils, in use on inside-packed pumps, assures increased economy, longer life, greater flexibility and resiliency. Furnished in spiral form (S 33), coil (C 33), and ring form (R 33). Sizes 3/8-inch and up.

(Printed in U. S. A.)

Flax Packings



List Prices and Dimensions

	Flax	Per Pound	Form
C189	1/2-inch and up	1.80	Coil
	1/4, 5/16, 3/8 and 7/16-inch	2.00	Coil
R189	1 1/2-inch I.D. and up	2.60	Ring

Flax Packings are recommended for service against cold water, either fresh or salt and brine and are available in regularly lubricated styles in coil and ring form. Can be furnished graphited throughout when required, and with more lubrication than standard if ordered double-dipped. W.P.H. Flax Packings are available for severe service conditions requiring W.P.H. Flax, in hard, medium and soft densities.

Asbestos Wick Packing



List Prices and Dimensions

	Asbestos Wick	Per Pound
4202	Standard 3-ply, approx. 1/4-inch	1.00
	1-ply Special, approx. 5/32-inch	1.30
	2-ply Special, approx. 7/32-inch	1.30

Asbestos Wick Packings are made in nine standard styles, for the many service conditions which call for the use of asbestos wick. These include packings of various combinations of pure and commercially pure asbestos roving twisted together; pure blue African roving twisted together for acid work; pure felted asbestos with a small cotton yarn in the center for added strength; loose twisted; and hard finished.

Twisted Asbestos Rope Packing



List Prices and Dimensions

	Asbestos Twisted Rope	Per Pound
4200	3/8-inch	1.40
	1/2-inch and up	1.20

Twisted Asbestos Rope Packings are made in six standard styles, in sizes 3/8-inch in diameter and up, for various service conditions, including a stranded pure blue African asbestos rope for acid work (1/2-inch and up). **Braided Asbestos Rope** is made in ten standard styles in sizes 1/4-inch and up; round, square plain, and wire-inserted.