


ILLCO-WAY ionXchange

serving the
essential power plants of
American industry

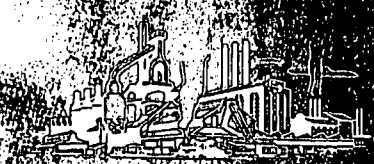

pioneers and leaders in ionXchange

ILLCO-WAY "firsts" include manufacture of the first commercial two-bed De-ionizer . . . the first commercial mixed-bed De-ionizer . . . and the development and building of the first successful installations for the purification of such liquids as beet-juice and crude glycerol by ionXchange . . . In the power field, boiler feed water treatment by ILLCO-WAY ionXchange has long meant lower operating costs and increased operating efficiency. Installations in leading plants.



DE-IONIZING
DE-ALKALIZING
SOFTENING

For complete data, see Sweet's File, Power Plant


ILLINOIS WATER TREATMENT CO., 3537 S. 4th St., Chicago, Ill.

111 E. 44th Street, New York 17, N.Y.

Canadian Distributors: Pumps & Co., Ltd.

(Advertisement)

REMOVE



per thousand
gallons!

3 lbs. of dissolved solids are removed from every 8,333 lbs. of feedwater in Midwest power plant (1,280 lbs. pressure). ILLCO-WAY ionXchange ionization operates on a raw water containing 21 grains of dissolved solids—provides an effluent containing less than 1 ppm solids.

Remove dissolved solids

ILLCO-WAY De-ionizers provide water free of dissolved solids, silica and CO₂. Manual or automatic controls; flow meter to meet plant requirements.

Remove hardness ILLCO-WAY De-ionizers (manual or fully automatic) provide any required amount of zero-hardness water. Compact, economical, easy to operate.

Remove alkalinity ILLCO-WAY Hydrogen Zeolite units reduce alkalinity, soften plant supply. Water with controlled alkalinity and zero hardness to meet requirements.

Send for your free copy

of Bulletin "Zero," containing performance data, installation views. Please write on company letterhead. Address: Illinois Water Treatment Co., 853-7 Cedar Street, Rockford, Illinois.

Which
"Zero"?

ILLCO-WAY

PERFORMANCE RATED for Long Lived ECONOMY



SUPERIOR STEAM GENERATORS

. . . are built to maintain full capacity operation at highest efficiencies throughout a longer serviceable life. Their full 5 sq. ft. of heating surface per h.p. provides maximum heat transfer at normal firing rates, assuring longer life, and eliminating the excessive maintenance and high electrical costs, caused by overfiring boilers with inadequate heat transfer surface.

Superior Steam Generators are rated for actual working performance under ordinary boiler room conditions . . . not on the basis of laboratory tests under ideal conditions.

A steam generator is a long-term investment. In the course of its life, operating savings can far outweigh initial cost. Specify Superior Steam Generators and profit from their operating savings for years to come.

Superior Steam Generators are fully automatic, burn oil or gas or both . . . 18 sizes from 20 to 600 h.p., for pressures up to 250 p.s.i., or for hot water. For complete details, write for catalog 500.

for performance you can **BANK** on

SUPERIOR COMBUSTION INDUSTRIES INC.
TIMES TOWER, TIMES SQUARE, NEW YORK 36, N.Y.

SUPERIOR
STEAM GENERATORS

POWER • JULY 1953