

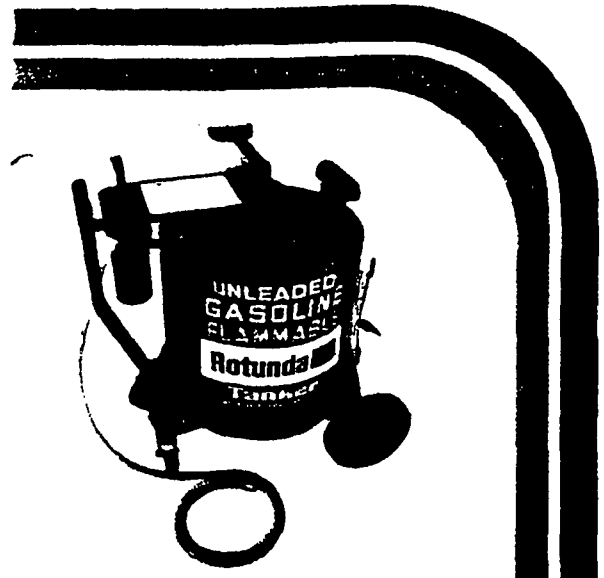


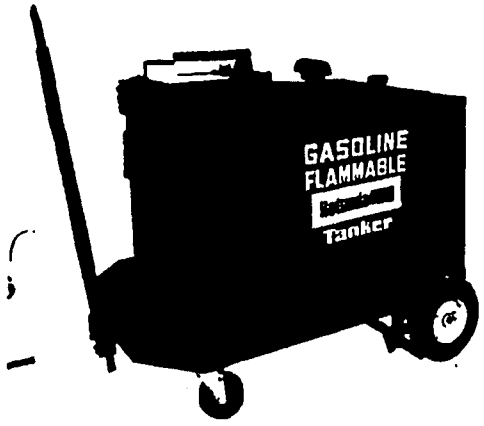

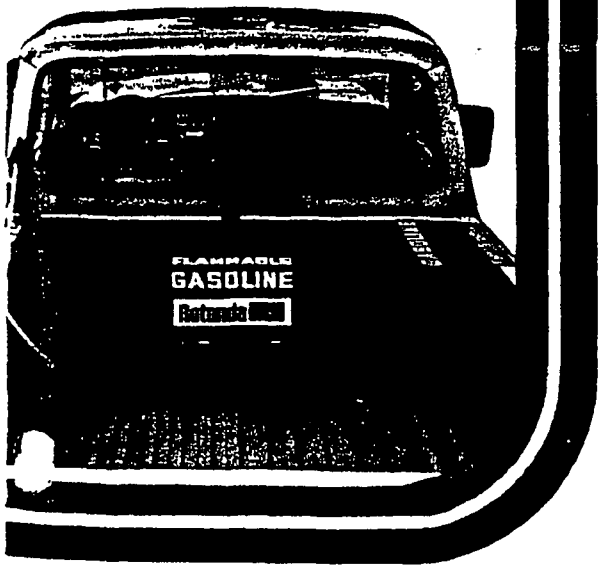

3 FUEL SAFETY ROTUNDA "HANDLERS"

ROTUNDA 30-GALLON, HAND-OPERATED, UNLEADED FUEL STORAGE TANKER 34-8002

Special Price through December 30, 1977: $289.00

Regular Price: $325.00 SAVINGS OF: $36.00

SPECIFICATIONS:

- FUEL FLOW SYSTEM – A double-stacked, four-way valve controls all functions – eliminating check valves and a shut-off valve.
- COMES EQUIPPED WITH TWO GROUNDING DEVICES. (One in the hose and a separate 16-gauge wire ground with alligator clips.)
- FLAME ARRESTOR FILL – Enables unit to be used as a mobile fuel supply.
- FLAME ARRESTOR VENT – Cast iron with double internal protector screens.
- DECAL FOR UNLEADED FUEL – Included for dealers dispensing unleaded fuel.
- MAGNETIC FUEL GAUGE – Glass-covered, safety-sealed cap to help prevent fuel and fume leakage around gauge.
- TANK – 14 gauge, aluminized steel, all M.I.G. welded.
- PUMP – New high-vacuum hand pump.
- TRANSPARENT HOSE – 1/2" I.D., 10' long. Fits unleaded restrictor-type fills.
- FM APPROVAL – Fully complies with O.S.H.A. requirements.

ROTUNDA 100-GALLON FUEL STORAGE TANKER

34-8005 DIESEL, Hand-Operated Pump

Special Price through December 30, 1977: $647.00

Regular Price: $720.00 SAVINGS OF: $73.00

34-8007 GASOLINE, Hand-Operated Pump

Special Price through December 30, 1977: $647.00

Regular Price: $720.00 SAVINGS OF: $73.00

SPECIFICATIONS:

- FLAME ARRESTOR VENT – Cast iron with double internal protector screens.
- MAGNETIC FUEL GAUGE – Glass-covered, sealed cap to prevent fuel and fume leakage around gauge.
- HOSE – 5/8" I.D. x 8' long.
- CAPACITY – 100-gallons.
- PUMP – Either high-vacuum pump or air-operated pump.
- SAFETY GROUNDS – One ground in the hose and additional 16-gauge wire ground with alligator clip.

CONVERT STANDARD PICK-UP TRUCK TO MULTI-SERVICE VEHICLE

34-8008 Rotunda Auxiliary Refueling Tank

Special Price through December 30, 1977: $259.00

Regular Price: $290.00 SAVINGS OF: $31.00

This unit is designed for in-the-field, off-the-road refueling service. The easy-mount tank lets you deliver fuel or liquid at a fast-rate flow, through a high-vacuum hand-pump. The tank is equipped with:

- 2" approved flame-arrestor vent
- 1-1/2" fill opening and bayonet cap. (Accepts a standard locking cap.)
- Magnetic fuel gauge.
- 10' service hose.
- 3" mounting flanges to allow under-tank storage.
- Dimensions: Tank 64" L x 12" H x 16" D.

NOTE: TANK DOES NOT FIT A FLARE-SIDE PICK-UP.

SPECIFICATIONS:

- All-welded, 14-gauge, corrosion-resistant, aluminized steel.
- Heavy-duty flange pre-slotted so unit can be bolted to side rails of pick-up truck.
- Approximately 60-gallon capacity.
- Oversize tank vent with twin flame-arrestors.
- FM-approved-type fill opening with flame-arrestor that accepts standard locking cap. "Flammable" label warnings.
- Magnetic fuel gauge.
- Bright red, fuel-resistant equipment enamel.