PLAINTIFF'S EXHIBIT

USG-937

Catalog of Gypsum Plaster, Building Lime, Plaster Bases and Accessories

UNITED STATES GYPSUM

THE GREATEST NAME IN BUILDING

USG

GP024 1508

FIREPROOFING PLASTER

FIREPROOFING PLASTER—TECHNICAL DATA

product	average dry density (lbs./cu. ft.)	insulation value "k"	bag size (lbs.)	coverage/ ton (sq. ft.)
FIRECODE plaster	22-25	.70-.80	50	1100-1200 (1)

(1) For 1" thickness—coverage varies dependent upon surface and tool used in application.









FIRECODE "V" Plaster is a ready-to-use gypsum plaster for spraying directly (illustrated, right) to steel floor units, beams and columns, to provide economical fire protection. It is lightweight and non-shrinking, requiring the addition of water only. No bonding agents, lathing or hand tool operations are required; there is no "dusting" in application. It can also be applied over metal lath to form a fire-resistive enclosure containing structural members, piping, ductwork or electrical conduits.

Use of this lightweight fireproofing plaster in multi-story buildings in place of heavy masonry to protect the steel

GP024 1509

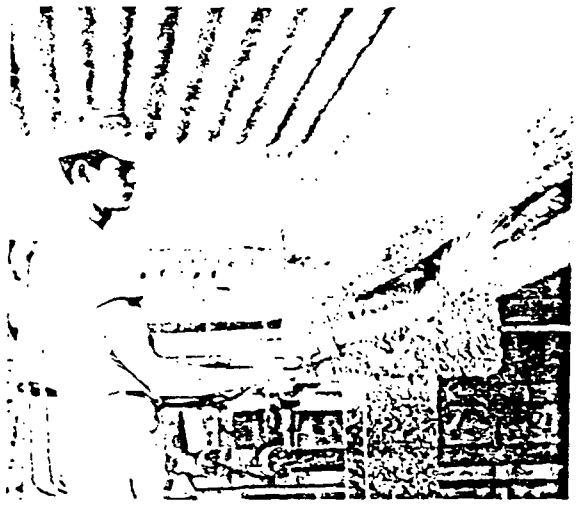

structure greatly reduces the dead load and permits the use of substantially lighter, less costly steel members. This new concept in building design is not only lower in applied cost, but provides increased flexibility in design, beauty, utility and safety.

FIRECODE "V" Plaster provides fire-resistive ratings on all major types of steel floor units, and on steel beams and columns (see pages 25, 36); meets requirements of NFPA pamphlet No. 220; listed under UL Guide No. 40, U-18.3. It also protects shop-primed steel from corrosion and eliminates the need for a job primer coat.

Although not generally considered a finished surface, a pleasing spray texture can be accomplished. Acoustical Plaster may be applied as a finish coat; or, the FIRECODE "V" surface may be spray-painted.



SP024 1510

Ad No. 09-1029-75
California Plasterer—Sept., 1965
Plastering Industries—Nov., 1965
1 Page—2 Color

30-STORY BUILDING
FINISHED

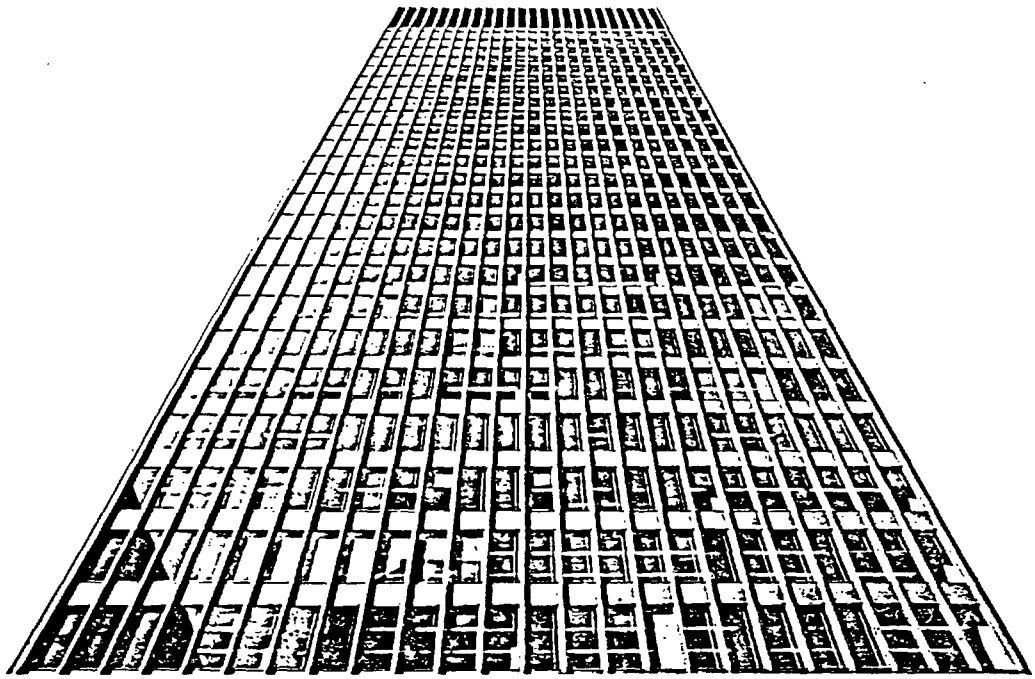

21 DAYS AHEAD OF SCHEDULE

with FIRECODE* "V" Plaster

The new Chicago Federal Building has 40,000 sq. ft. of floor space on each of its 30 floors. By using RED TOP* FIRECODE "V" Plaster, the Louis Galie Plastering Co. spray-fireproofed a floor a week—finished well ahead of estimate. Mr. Galie said:



Albert Galie—President
Louis Galie Plastering Co.

"Superior pumping characteristics of FIRECODE 'V' Plaster enabled us to meet a tough schedule. We were able to commit ourselves to this schedule, due to our previous experience with FIRECODE 'V'. The quality work produced by our crews on the Federal Office Building job has generated additional FIRECODE 'V' jobs for us in the Chicago area.

"This is new business. Spray fireproofing work done with FIRECODE Plaster has been a large contributing factor to our company growth and development."

FIRECODE "V" Plaster is the lowest-cost way to protect structural steel. It comes ready to use, mixes in any ordinary mixer, pumps faster and farther. You get a super-strong bond with no taping or special bonding preparations. And it meets fire-rating requirements through application thickness alone.

Start using RED TOP FIRECODE "V" Plaster now. Just call your U.S.G. Sales Representative, or write to us at 2322 West Third Street, Dept. CP-58, Los Angeles, California 90057.



UNITED STATES GYPSUM
THE GREATEST NAME IN BUILDING

*Reg. U.S. Pat. Off.

CP024 1511